



2 Way 2.92mm Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watt

Power Dividers Technical Data Sheet

PE2063

Features

- 2-Way Power Divider
- Resistive Design
- DC to 12.4 GHz Frequency Range
- Insertion Loss 6 dB Typ
- Max Power 1 Watt (CW)

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The PE2063 is a 2-way resistive power divider that operates from DC to 12.4 GHz and can handle up to 1 Watt (CW) with 6 dB typ insertion loss. The package interface uses 2.92mm connectors and is REACH and RoHS compliant.

Electrical Specifications

Design	Resistive
Number of Output Ports	2

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
Impedance		50		Ohms
Input VSWR			1.2:1	
Insertion Loss		6		dB
Amplitude Balance		0.4		dB
Phase Balance		±2		Degrees
Input Power (CW)			1	Watts

Electrical Specification Notes:
 Insertion loss includes splitting loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way 2.92mm Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watt PE2063](#)



2 Way 2.92mm Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watt

Power Dividers Technical Data Sheet

PE2063

Mechanical Specifications

Size

Length	0.5 in [12.7 mm]
Width	0.5 in [12.7 mm]
Height	0.38 in [9.65 mm]
Weight	0.041 lbs [18.6 g]

Configuration

Package Type	Connectorized
Input Connector	2.92mm Male
Output Connectors	2.92mm Female

Mechanical Specification Notes:

2.92mm connectors mate both electrically and mechanically with all 3.5mm and SMA connectors.

Environmental Specifications

Temperature

Operating Range	-65 to +125 deg C
-----------------	-------------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

2 Way 2.92mm Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watt from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way 2.92mm Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watt PE2063](http://www.pasternack.com/2-way-2.92-power-divider-dc-12.4-ghz-1-watts-pe2063-p.aspx)

URL: <http://www.pasternack.com/2-way-2.92-power-divider-dc-12.4-ghz-1-watts-pe2063-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2063 CAD Drawing

2 Way 2.92mm Resistive Power Divider From DC to 12.4 GHz Rated at 1 Watt

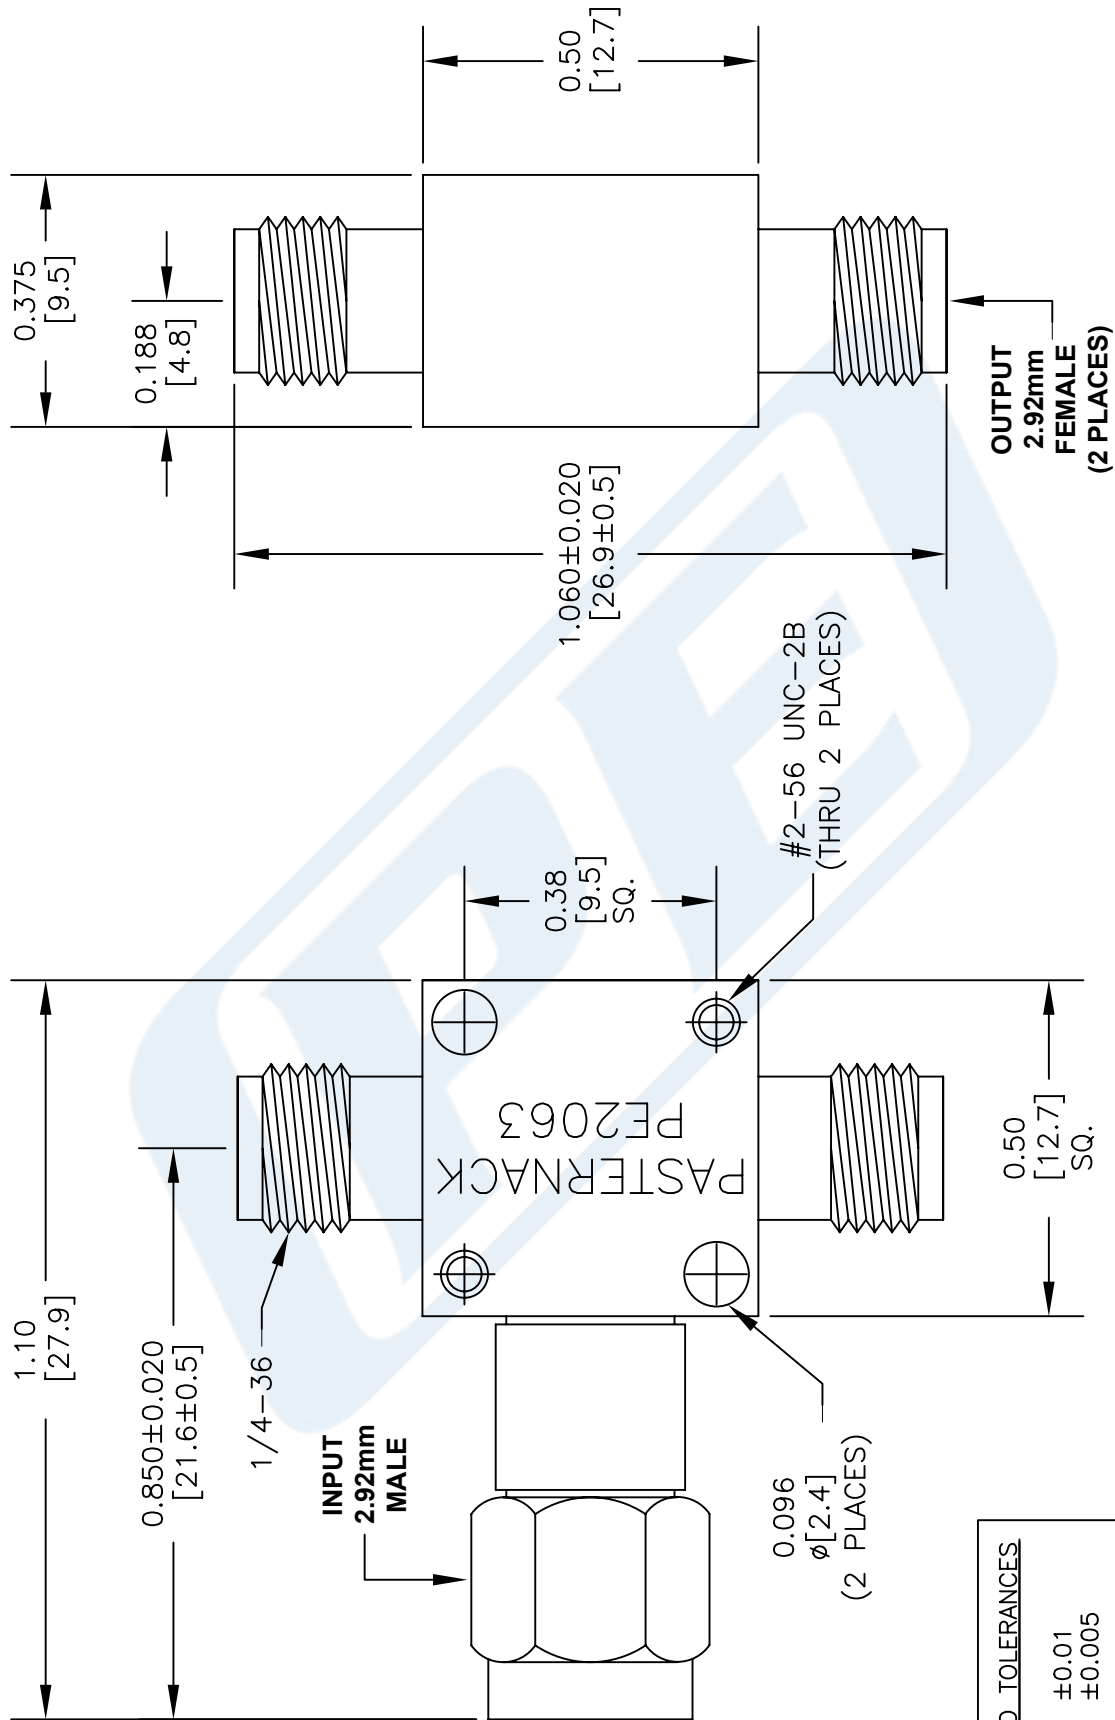

STANDARD TOLERANCES	
DECIMAL	±0.01
.XX	±0.005
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<p>NOTES:</p> <ol style="list-style-type: none"> UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. DIMENSIONS ARE IN INCHES [mm]. 	
<p>DWG TITLE</p> <h2>PE2063</h2>	
<p>FSCM NO. 53919</p>	
<p>CAD FILE 040116</p>	
<p>SCALE N/A</p>	
<p>SIZE A</p>	
<p>3045</p>	

PE PASTERNAK
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com