


## **Environmental Meter PCE-RCM 8**





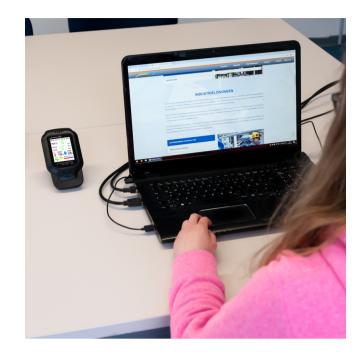

**Environmental meter PCE-RCM 8** 

Indoor / Battery-powered multi-function particle counter / LC display / Mass concentration PM 1.0, PM 2.5, PM 10 / Formaldehyde / Alarm function / Temperature measurement / Foot stand / Switchable display

The multi-function particle counter PCE-RCM 8 performs many measuring tasks. For example, the multi-function particle counter can measure mass concentration, formaldehyde and TVOC. This multi-function particle counter is specially designed for indoor measurement. The  $320 \times 240$  pixel display shows you directly the current measured values.

Due to its ease of use and the large display, this multi-function particle counter is optimally suited for measuring in offices, schools and living spaces. With the help of the data logger function, you can view the last parameters at any time. Thanks to the built-in lithium ion battery, you can position the multi-function particle counter freely at your workplace.

- ▶ Battery operation
- ► LC display
- ► Measurement of TVOC
- ▶ Temperature measurement
- ► Alarm function
- ► Mass concentration
- ► Setting foot
- ► Formaldehyde in mg / m³

## **Specifications**

Measuring range **PM 1.0** 0 ... 999  $\mu$ g / m<sup>3</sup>

Accuracy ± 15%

Sensor technology Laser scattering

Measuring range **PM 2.5** 0 ... 999  $\mu$ g / m<sup>3</sup>

Accuracy ± 15%

Sensor technology Laser scattering

Measuring range **PM 10** 0 ... 999  $\mu$ g / m<sup>3</sup>

Accuracy ± 15%

Sensor technology Laser scattering

Measuring range **HCHO** 0.001 ... 1.999 mg / m<sup>3</sup>

Accuracy ± 15%

Sensor technology Electrochemical sensor

Measuring range **TVOC** 0.001 ... 9.999 mg / m<sup>3</sup>

Accuracy ± 15%

Sensor technology Semiconductor sensor

Measuring range **temperature** -10 ... 60°C / 14 ... 140°F

Resolution  $0.1^{\circ}\text{C} / 0.18^{\circ}$ Accuracy  $\pm 15\%$ 

Measuring range **humidity** 20 ... 99% rh

Resolution 1% rh Accuracy  $\pm$  15%

Air Quality Index 0 ... 500

Measuring rate 1.5 s

Display LCD display 320 x 240 pixels

Power supply Built-in lithium ion battery 1000-mAh Dimensions  $155 \times 87 \times 35 \text{ mm} / 6.1 \times 3.4 \times 1.4 \text{ in}$  Storage conditions  $-10 \dots 60^{\circ}\text{C} / 14 \dots 140^{\circ}\text{F}, 20 \dots 85\% \text{ rh}$ 

Weight About 160 g / < 1 lb