

PQube® 3e Power Analyser



Features


- Auto-detects the mains frequency, wiring configuration and nominal voltage
- Connects directly to voltages up to 690 V
- Certified for Class A power quality as per IEC 61000-4-30 Ed3
- Computes 4-quadrant ANSI Class 0.2 revenue-grade energy on 14 single-phase channels
- Monitors DC power and process parameters with four additional AC/DC analog channels
- Detects and records high-frequency impulses at 4 MHz
- Measures in real time and records 2 kHz - 150 kHz emissions
- No software to install, built-in web and email server
- 32 GB of internal flash memory, holds years of data

PQube 3e Monitors up to Four 3-Phase Circuits.

The PQube 3e Class A certified, high-speed revenue-grade power analyzer identifies, measures, and records in real-time all power quality disturbances. Plus it can replace four traditional revenue-grade meters as well as deliver environmental sensing and external process measurements.

PQube 3e's boast an impressive number of standard features including 14 energy metering channels, 4-quadrant metering, alarms, and push reporting. PQube's are built sturdy and compact, the size of a Rubik's cube. Install them anywhere you need power analyzed in production equipment, data centers, or harsh environments.

Results

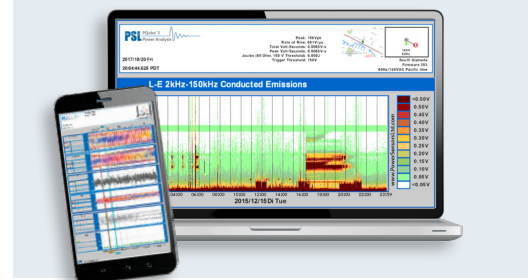

- **Real-time readings via protocols**
Modbus/TCP, SNMP, BACnet, DNP3.0
- **Event recordings and graphs**
Text, CSV, GIF, and IEEE 1159-3 PQDIF"
- **Daily, weekly, monthly, trends and graphs**
Text, CSV, GIF, and IEEE 1159-3 PQDIF

TECHNICAL SPECIFICATIONS

PQube 3e TECHNICAL SPECIFICATIONS	
Dimensions (L X W X H)	4.33 in X 2.89 in X 3.08 in (11.0 cm X 7.34 cm X 7.82 cm), 1.8 in (3.5 cm) DIN rail mountable
Weight	10.5 oz (300g)
Operating Environment (Temp., Hum., Alt.)	-20 to 65 °C (55 °C with PM2 AUX load), 5 - 95% RH (inside use), <2000 m above sea level (for EMC immunity, overvoltage, and other conditions, see full specs)
Power Supply (Ac)	24 VAC ±10% at 50/60/400 Hz, 1.5A max (Powerside's PM1 and PM2 modules supply PQube 3 compatible power at 100 to 240 VAC 50/60 Hz, and 120 to 370 VDC)
Power Supply (Dc)	±24 to 48 VDC ±10% (polarity independent), 1A max. Power over Ethernet (PoE) compatible
Internal Memory	32 GB (holds over a year of data, depending on number of recorded events)
Data Backup	16 GB (up to 128GB) micro SD card or USB 2.0 thumb drive
Clock Synchronization	SNTP, NTP, GPS (optional)
Output File Types	Text, GIF, CSV, and IEEE 1159-3 PQDIF
Communication Ports	Ethernet RJ45 10/100 (optional external wireless or cell modem)
Communication Protocols	Modbus/TCP, DNP 3.0, SNMP with traps, BACnet, FTP or HTTP (secure FTPS and HTTPS), and email

MEASUREMENT FUNCTIONS

VOLTAGE	
Sampling rate	512 samples per cycle at 50 Hz / 60 Hz (applies to voltage, current, and analog channels)
Number of Inputs	4 + Reference to earth (L1, L2, L3, N, E)
Range	0 - 750 VAC (L-N), 0 - 1300 VAC (L-L), impedance: 4.8M Ω
Voltage Magnitude*	L-L, L-N, L-E, and N-E. RMS over 1/2 cycle (Urms 1/2)
Frequency*	50 Hz, 60 Hz, 400 Hz, or 16.67 Hz
Unbalance (negative and zero sequence)*	IEC, GB, and ANSI methods
Flicker (Pinst, Pst, and Plt)*	IEC 61000-4-15
Voltage Harmonic & Interharmonic*	Volt or %H1, IEC 61000-4-7 Class 1, order up to 50 th
Total Harmonic Distortion (THD)	%, IEC 61000-4-7
High Frequency Impulse (voltage)	Records transient pulses on one channel (L1-E, L2-E, L3-E, or N-E) at 4 MHz sampling, or all 4 channels at 1 MHz, range: ± 6 kV
Conducted Emissions (2 - 9 kHz)*	Volts for L1-E, L2-E, L3-E : resolution 200 Hz bins, range 0 to 60 Vpk
Conducted Emissions (8 - 150 kHz)*	Volts for L1-E, L2-E, L3-E, and N-E: resolution 2000 Hz bins, range 0 - 60 Vpk
CURRENT	
Number of Inputs	14 inputs, differential. I1 - I8, I9 - I14 Range: 0.333Vrms, 10Vpk, 0 - 6000 Amp with CTs, impedance: 33.3 k Ω
Current Magnitude*	RMS refreshed 1/2 cycle (Irms 1/2)
Peak Current	RMS over 1 sec, 1 min, or user defined (3 min to 1 hr)
Unbalance (negative and zero sequence)*	IEC, GB, and ANSI methods
Current Harmonics & Interharmonics*	Amp, order up to 50 th
Total Demand Distortion (TDD) or	Amp, IEC 61000-4-7
Total Harmonic Demand Distortion (THDI)	%, IEC 61000-4-7

*Meets or exceeds IEC 61000-4-30 Ed. 3 Class A

POWER	
Number of Channels	14 calculated channels. I1 to I8, I9 to I14, calculated with either L1-N, L2-N, or L3-N voltages
Total Power	Up to two 3-phase loads
Peak Power	Intervals: 1 sec, 1 min, or user defined (up to one hour)
Reactive Power	VAR (per-phase and total)
Apparent Power	VA (per-phase, peak, and total)
Power Factor	TPF or DPF method (per-phase and total)
ENERGY	
Number of Channels	14 channels. I1 to I8, I9 to I14 calculated with either L1-N, L2-N, or L3-N voltages
Energy (Import, Export, & Net)	kWh (per-phase and total) Accuracy certified C.12.20 Class 0.2 and IEC 62053-22 Class 0,25
Reactive Energy (Import, Export, And Net)	kVARh (per-phase and total)
Apparent Energy	kVAh (per-phase and total)
ANALOG	
Number of Inputs	4 single ended or 2 differential (A1, A2, A3, A4, E). Range: Low: ± 10 VDC, High: ± 100 VDC
Analog Magnitude	(AN1-E, AN2-E, AN3-E, AN4-E) or differential (AN1-AN2, AN3-AN4) RMS refreshed 1/2 cycle
Power & Energy Configuration (Optional)	Power and energy meter 1 (AN1 X AN2), power and energy meter 2 (AN3 X AN4)
DIGITAL	
Number of Inputs	1 differential input (D+, D-). Digital threshold 1.5 V \pm 0.2 V typical
ENVIRONMENT	
Number of Inputs	2 ENV2 probe inputs (USB2, USB3). Uses Powerside's ENV2 EnviroSensor probe.
Temperature	-4 to 176 °F (-20 to 80 °C)
Humidity	0 to 100 % RH
Barometric Pressure	Resolution better than 0.001 hPa
Acceleration (x, y, and z)	± 2 , ± 4 , or ± 8 gravity ranges, trigger on shock/vibration, seismic, or tilt
RELAY	
Number Of Outputs	1 output, trigger programmable
Activation Mode	Activated on sag/swell, over/under frequency, overcurrent, inrush, waveshape change, High Frequency, impulse, snapshot, and digital/analog events
Rating	RLY1 - 30 V AC or DC, 300mA max, activates for event duration or 3 seconds (whichever is longer), 20 ms delay

*Meets or exceeds IEC 61000-4-30 Ed. 3 Class A



Contact us

info@powerside.com
powerside.com



Canada

7850 Trans-Canada Highway
Saint-Laurent (QC) H4T 1A5
1 (877) 333-8392

United States

980 Atlantic Ave
Alameda (CA) 94501
1 (888) 736-4347