1 Year Warranty

The Manufacturer warrants to the purchaser of this new light that it was thoroughly tested and inspected and found to be in perfect working order before leaving our factory. If within 1 year from the date of purchase, any part of this unit proves to be defective in material or workmanship, such defective part will be repaired or replaced (company option) free of charge, at our factory. The company's liability in all events is limited to the purchase price paid.

The warranty does not apply to damage, alteration, misuse or abuse not attributed to the Manufacturer, its representatives, dealers, or their employees. This warranty does not apply if the product is mishandled or operated with a battery pack other than the one supplied by the manufacturer. This warranty pertains to any work light that may be termed by the manufacturer as a service unit.

Illustrations and descriptions are for the sole purpose of identification and do not express or imply a warranty that the products will necessarily conform to the illustrations or descriptions.

When returning product for warranty repair, ship freight pre-paid, and please provide: from whom purchased, date of purchase, attach receipt or give invoice number, and please provide: a brief description of your problem.

KEEP THIS MANUAL GARDER CE MANUEL

If this Worklight malfunctions or is in need of repairs, send to: Si cette baladeuse fait défaut ou si elle a besoin d'être réparée, veuillez l'envoyer à :

CUSTOMER SERVICE DEPARTMENT [SERVICE À LA CLIENTÈLE]

1336 WEST WILEY AVENUE BLUFFTON, IN 46714 PHONE / TÉL: (260) 824-3440 FAX: (260) 824-3448

DO NOT return to place of purchase. They are not authorized to accept used or damaged units.



Care & Operation of your New Stubby II® Cordless LED Worklight

CAUTION!:

• <u>**MARNING!</u>** Do not operate the light or battery charger in a hazardous environment containing flammable gases or dust</u>

MARNINGS FOR LIPO BATTERY PACK!

Failure to observe these warnings may result in voiding of warranty, damage, FIRE, and EXPLOSION.

- DO NOT INCINERATE
- DO NOT PIERCE OR PUNCTURE
- DO NOT CRUSH
- DO NOT USE IF DAMAGED
- DO NOT IMMERSE IN LIQUIDS
- DO NOT USE ANY OTHER CHARGER THAN CHARGER MODEL #5000-1618.
- CAUTION: Electric Shock Hazard Use light and charger in dry locations only
- DO NOT SHINE LIGHT DIRECTLY INTO EYES.
- Inspect regularly for damage and repair or replace if necessary.
- If battery pack is cracked or damaged do not use replace battery pack immediately.
- Do not submerge any part of light or battery pack in liquids.
- Use only replacement battery pack, model number 5000-1639
- Dispose of spent battery packs in accordance with local and Federal laws


OPERATION & MAINTENANCE:

- 1. Read the entire operator manual before using.
- 2. Charge battery as described below.
- 3. After installing fully charged battery in light, you will have 8 hours of continuous use.
- 4. The light has a battery charge indicator LED that blinks to show that the battery needs to be recharged. When the light starts blinking, recharge the battery.
- 5. Keep the unit free from grease and dirt by using a damp cloth with mild detergent, or waterless hand cleaners. This removes dirt from scratches in outer tube and will provide the best output at all times.
- 6. Do not use lacquer based solvents such as MEK to clean unit as these solvents make the parts brittle.

BATTERY CHARGING INSTRUCTIONS:

- 1. Before charging, read all warnings in the CAUTION section of manual
- 2. When the battery charge indicator is blinking slowly or is red, remove the battery from the light head.
- 3. Plug the AC adaptor into 120 VAC 50/60Hz power outlet.
- 4. Plug charger DC plug into top of battery DC receptacle.
- 5. LED indicator light on charger will turn red during charging.
- 6. LED Indicator light on charger will turn green when fully charged.
- 7. When charged, disconnect charger from battery pack and from AC outlet.
- 8. CAUTION: Battery charger comes with a trickle charge feature; however, long term overcharging will affect the performance and service life of the battery.



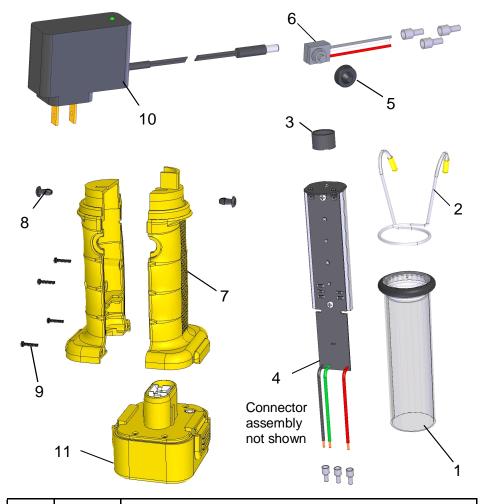

Item	Part No.	Description
1	5000-1429	Outer tube assembly- polycarbonate tube lens, reflector, bumper-ring
2	5000-0461	Twin spring steel hook with black tips
3	5000-1438	Lens for end light
4	5000-1646	LED board and heat sink with end light assembly, 4 LED
5	5000-0563	Switch boot cover
6	5000-1431	Switch for LED lights with end light
7	5000-1430	LED light handle
8	5000-1241	Push pin for outer tube attachment
9	5000-1435	Screw, handle
10	5000-1618	Charger, for LiPo pack
11	5000-1639	Battery pack, LiPo

