

Dimensional Tolerances:  
Length: +/- 1/8"  
Width: +/- 1/8"  
Skirt: -0", +1/4"

Spool Tolerances:  
1" arbor hole core plug  
10" OD core flange  
3" ID paper core

## AUTO-SHIELD® SERIES




Our 1000 Series Metal-In Static Shielding film converted into pre-opened bags on a spool compatible with most in-line baggers. Customization available.

### Specifications

Physical	Value	Test Method
Tensile Strength	4600 PSI, 32 MPa	ASTM D882
Puncture Resistance	12 lbs, 53 N	MIL-STD-3010C Method 2065
Seal Strength	11 lb, 48 N	ASTM D882
Thickness	2.8 mils, 0.071 mm, +/- 10%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias
Electrical	Value	Test Method
ESD Shielding	< 10 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	1 x 10 <sup>4</sup> to < 1 x 10 <sup>11</sup> ohms	ANSI/ESD STM11.11
Surface Resistance - Static Decay	< 1 x 10 <sup>11</sup> ohms < 2 seconds	AMS/ESD STM11.11 ETS 406D
Cleanliness	Value	Test Method
Silicone	Not Detected	FTIR
Heat Sealing Conditions	Value	
Temperature	300°F – 375°F, 149°C – 190°C	
Time	0.5 – 3.5 seconds	
Pressure	30 – 70 PSI, 206 – 482 KPa	

Item #	Bag Size (W x L)	Bags per Roll	Notch Location (from opening)
<a href="#">12035</a>	3" x 5"	1250	1-1/2" +/- 1/2"
<a href="#">12046</a>	4" x 6"	1000	1-1/2" +/- 1/2"
<a href="#">12068</a>	6" x 8"	1000	3" +/- 1/2"
<a href="#">120810</a>	8" x 10"	750	3" +/- 1/2"

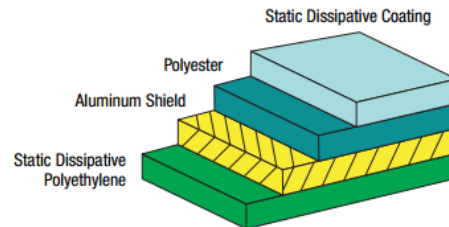

Specifications and procedures subject to change without notice.

### 1000 SERIES AUTO-SHIELD® BAG, ROLL

926 JR Industrial Drive, Sanford, NC 27332  
WEB SITE: [StaticControl.com](http://StaticControl.com)  
PHONE: EAST: (919) 718-0000 | WEST: (909) 627-9634

**DRAWING  
NUMBER**  
12035

**DATE**  
October  
2024

**SCS**