



DESCO INDUSTRIES INC

926 JR INDUSTRIAL DRIVE, SANFORD, NC 27332 • PHONE (919) 718-0000 | (909) 627-9634 • StaticControl.com

QUALIFICATION REPORT – ANSI/ESD S20.20

SCS DUAL CONDUCTOR METAL WRIST STRAP

| ANSI/ESD S20.20 | SCS Test Results | Test Methods |
|--------------------|---------------------|--------------|
|--------------------|---------------------|--------------|


Resistance (ohms), N=6 specimens, 10V-100V

| | | | |
|--|--|-------------|------------------------------|
| Wrist Strap (Band and Cord) | 0.8×10^6 to 1.2×10^6 | See Table 1 | ANSI/ESD S1.1 (Section 6.1) |
| Wristband Interior | $< 1.0 \times 10^5$ | See Table 1 | ANSI/ESD S1.1 (Section 6.2) |
| Wristband Exterior | $> 1.0 \times 10^7$ | See Table 1 | ANSI/ESD S1.1 (Section 6.2) |
| Wrist Strap System | $< 3.5 \times 10^7$ | See Table 1 | ANSI/ESD S1.1 (Section 6.10) |


Test Data:

Table 1 – Resistance (ohms)


| | Sample #1 | Sample #2 | Sample #3 | Sample #4 | Sample #5 | Sample #6 |
|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Wrist Strap ANSI/ESD S1.1 – Figure 2 | 1.16×10^6 | 1.17×10^6 | 1.16×10^6 | 1.16×10^6 | 1.17×10^6 | 1.15×10^6 |
| Wristband Interior ANSI/ESD S1.1 – Figure 4 | $< 1.0 \times 10^3$ |
| Wristband Exterior ANSI/ESD S1.1 – Figure 4 | 7.30×10^{11} | 7.78×10^{11} | 8.60×10^{11} | 7.55×10^{11} | 7.97×10^{11} | 7.52×10^{11} |
| Wrist Strap System ANSI/ESD S1.1 – Figure 8 | 1.22×10^6 | 1.28×10^6 | 1.26×10^6 | 1.29×10^6 | 1.29×10^6 | 1.25×10^6 |

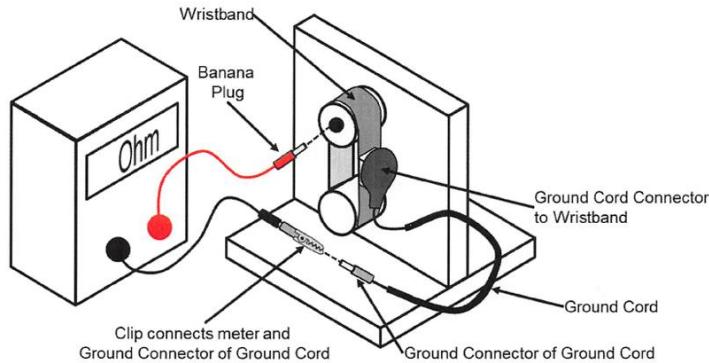References:

ANSI/ESD S1.1 – Figure 2: Set-up for Wrist Strap Resistance Test

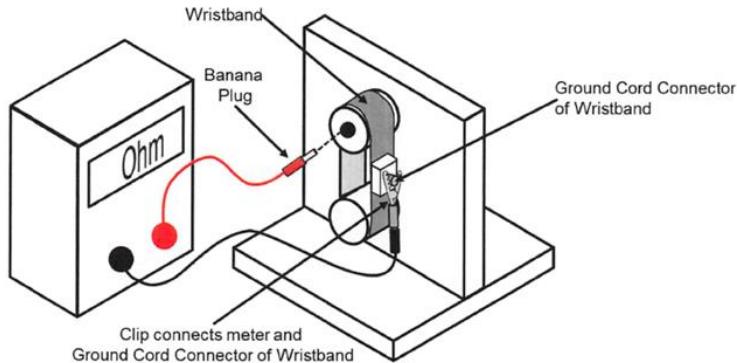

ANSI/ESD S1.1 – Figure 4: Set-up for Wristband Resistance Test

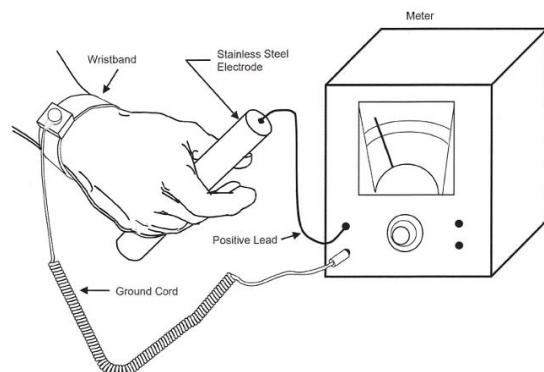

ANSI/ESD S1.1 – Figure 8: Wrist Strap System Resistance Test