


Electric


LDX8050

8" (203 mm) wide — Electric Label Dispenser "HIGH SPEED"


- Ideal for long and wide packaging-type labels
- Automatically peels and advances labels
- Photosensor accuracy and reliability
- Powder-coated aluminum construction
- High-torque motor for heavy rolls of labels
- Will dispense labels from .25" to 8" (6 to 203mm) in width
- Will dispense labels from .5" to 12" (13 to 305mm) in length
- LDX8050 dispenses labels up to 3.9"/seconds*
- Made in U.S.A. 



COMMON MATERIALS

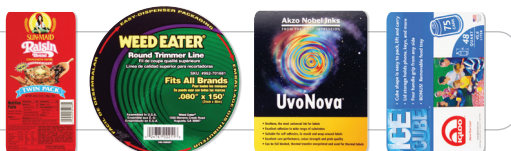

Additional info for LDX8025, LDX8050 & LDX8100


- Will dispense labels and die-cut parts
- Adjustable strip plate for hard-to-release labels
- Will accommodate core sizes of 1" (25mm) and 3" (76mm)
- Capable of dispensing labels made of paper, polyester, vinyl, acetate and foil
- Automatically rewinds liner scrap for a cleaner working environment
- Liner scrap is easily removed
- No tools required for adjusting to different size label
- No maintenance required
- Lightweight frame
- All 230V machines are  Certified

SPECIAL APPLICATIONS

- For clear labels, please select Model # LDX8025C or LDX8050C

LDX8100




8" (203mm) wide — Electric Label Dispenser "SUPER SPEED"

- Ideal for long and wide packaging-type labels
- Automatically peels and advances labels
- Photosensor accuracy and reliability
- Powder-coated aluminum construction
- High-torque motor for heavy rolls of labels
- Will dispense labels from .25" to 8" (6 to 203mm) in width
- Will dispense labels from .5" to 12" (13 to 305mm) in length
- LDX8100 dispenses labels up to 7.8"/seconds*
- Made in U.S.A. 



Meets UL 60950-1 2nd Ed., CSA C22.2# 60950-1 2nd Ed and IEC 60950-1 2nd Ed Standards.
Certified By Bureau Veritas / Curtis Straus (OSHA recognized NRTL Laboratory).

For 230V machines, please add "-2" to the end of the model number.
(Example: LDX8050-2)

MODEL #	Liner Capacity Width	Length	Roll Capacity	Feed Speed*	Dimensions	Electrical Requirements	Weight
LDX8025	.25" to 8" (6 to 203mm)	.125" to 12" (3 to 305mm)	12" (305mm)	2"/sec* (5.1cm/sec.)	14.4"(L) x 14.9"(W) x 10.4"(H) 36.6(L) x 37.8(W) x 27.7cm(H)	100/115V AC, 0.75A 60Hz (220-240V AC, 0.4A 50Hz )	11.00 lbs (5 kg)
LDX8050	.25" to 8" (6 to 203mm)	.50" to 12" (13 to 305mm)	12" (305mm)	3.9"/sec* (10cm/sec.)	14.4"(L) x 14.9"(W) x 10.4"(H) 36.6(L) x 37.8(W) x 27.7cm(H)	100/115V AC, 2.5A 60Hz (220-240V AC, 1.8A 50/60Hz )	12.80 lbs (5.8 kg)
LDX8100	.25" to 8" (6 to 203mm)	.50" to 12" (13 to 305mm)	12" (305mm)	7.8"/sec* (19.8cm/sec.)	14.4"(L) x 14.9"(W) x 10.4"(H) 36.6(L) x 37.8(W) x 27.7cm(H)	100/115V AC, 2.5A 60Hz (220-240V AC, 2A 50Hz )	12.80 lbs (5.8 kg)

*Feed Speed calculated at take-up hub origin. Feed Speed will increase as material dispenses. Speed calculated at 60Hz.