



# AC ELECTRIC SCREWDRIVER DIRECT PLUG IN

## Low Torque Full Auto Shut-off

■ Torque Range 0.15~1.86 N.m

### Feature

- Lever or Push Start.
- Automatic shut-off clutch.
- Torque Accuracy  $\pm 3\%$ .
- Reverse/Forward
- Direct Plug-In.
- Excellent for general machine screws.
- RPM Range: 1000 ~ 2000
- Easy to operate.



Lever Start Type

110V  
**ED-212L1**  
**ED-212LH1** High Speed  
**ED-219L1**  
 220V  
**ED-212L2**  
**ED-212LH2** High Speed  
**ED-219L2**




Push to Start Type

110V  
**ED-212P1**  
**ED-212PH1** High Speed  
**ED-219P1**  
 220V  
**ED-212P2**  
**ED-212PH2** High Speed  
**ED-219P2**

### External Dimension


unit:mm

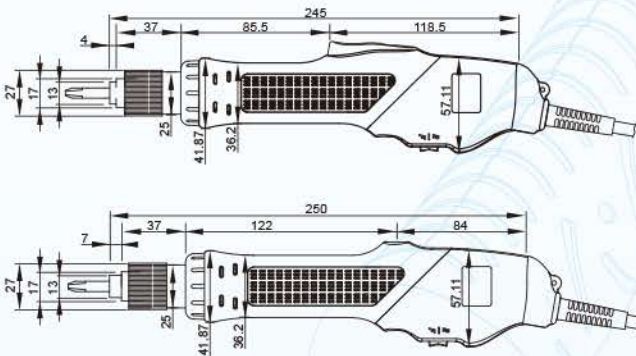

Lever Start Type  
 ED-212L1 ~ ED-219L2

Push to Start Type  
 ED-212P1 ~ ED-219P2

### Torque Curve

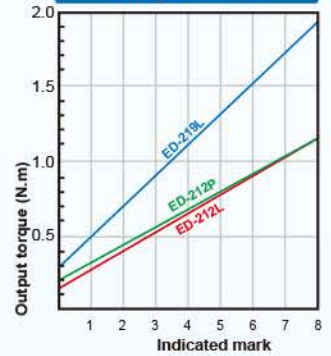

### Specifications :

Model No.	Torque Range $\pm 3\%$			Uploaded Speed $\pm 10\%$ (r.p.m.)	Available Screw				Net Weight		overall Length		Power Source	Bit Type
	kgf-cm	lbf-in	N.m		Machine Screw ( $\varnothing$ )		Tapping Screw ( $\varnothing$ )		g	lb	mm	in		
<b>Lever Start Type</b>														
ED-212L1	1.5~12	1.30~10.42	0.15~1.18	1000	1.6~3.0	0.06~0.12	1.6~2.6	0.06~0.10	550	1.21	245	9.65	AC110~120V 50/60Hz	A HEX 5mm
ED-212LH1	1.5~12	1.30~10.42	0.15~1.18	2000	2.0~3.0	0.08~0.12	2.0~2.6	0.08~0.10	550	1.21	245	9.65		
ED-219L1	3.0~19	2.60~16.49	0.29~1.86	1000	2.6~3.5	0.10~0.14	2.6~3.0	0.10~0.12	550	1.21	245	9.65		
<b>Push to Start Type</b>														
ED-212P1	2.0~12	1.74~10.42	0.19~1.18	1000	1.6~3.0	0.06~0.12	1.6~2.6	0.06~0.10	550	1.21	245	9.65	AC110~120V 50/60Hz	B HEX 6.35mm
ED-212PH1	2.0~12	1.74~10.42	0.19~1.18	2000	2.0~3.0	0.08~0.12	2.0~2.6	0.08~0.10	550	1.21	245	9.65		
ED-219P1	3.0~19	2.60~16.49	0.29~1.86	1000	2.6~3.5	0.10~0.14	2.6~3.0	0.10~0.12	550	1.21	245	9.65		
ED-212P2	2.0~12	1.74~10.42	0.19~1.18	1000	1.6~3.0	0.06~0.12	1.6~2.6	0.06~0.10	550	1.21	245	9.65	AC220~240V 50/60Hz	C $\varnothing 4mm$
ED-212PH2	2.0~12	1.74~10.42	0.19~1.18	2000	2.0~3.0	0.08~0.12	2.0~2.6	0.08~0.10	550	1.21	245	9.65		
ED-219P2	3.0~19	2.60~16.49	0.29~1.86	1000	2.6~3.5	0.10~0.14	2.6~3.0	0.10~0.12	550	1.21	245	9.65		

Screwdrivers come standard with bit type B HEX 6.35mm

Meet RoHS standard, Without ETL/CE certificate.