

---

# Cable sleeves and spiral wraps

## Cable protection systems

The Cable Protection Systems (CPS) captures different products:

Wrap-around woven sleeving, braided sleeving, spiral wrap & extruded grommeting.

The wrap-around sleeving – better known under the name Bind-It – is a tough but lightweight sleeve used to bundle and protect wires and cables from abrasion, sharp edges and chafing. Bind-It is a selfwrapping sleeve that is very quick and easy to install and remove. Bind-It is also available in a flame retardant version. No heat is necessary to seal the ends of this product. The ends can be secured by using Ty-Rap cable ties.

The braided sleeving is used for bundling and protecting cables. The braided sleeving is a closed sleeve available in a flame and a non-flame retardant version. This product is mainly used inside cabinets and enclosures. To stop the end of the sleeving fraying it is necessary to heat seal the ends using a “hotwire” device.

Spiral wrap is mainly used for protection of bundles. This product is available in a natural and UV-resistant version and supplied in a Euroslot bag, ideal for the distribution market.

Finally the extruded grommeting of ABB is used to line panel edges and knock-outs where the chafing of passing wires is a concern. In most applications, grommeting will grip tightly by itself



## Wire protection products

### Spiral Wrap



#### Characteristics

- Install with gaps for greater flexibility or butted together for maximum abrasion resistance, insulation and rigidity
- Packaged in 100 foot reels
- Protects bundles from 0.063 in. to 7 in. (1.6 mm to 177.8 mm) diameters
- Also commonly known as reverse cut, left-handed cut or counter-clockwise cuted

#### Technical information

- Material: Natural polyethylene or Weatherable black polyethylene
- For general indoor use to 50°C (122°F).
- Material is flexible and easy to work with

#### Spiral wrap

Cat. n°	Colour	Outside diameter		Pitch		Nominal wall thickness		Bundle range		Reel Qty.
		[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	
SRPE-125-9-C	Natural	3.2	0.13	5.3	0.21	0.9	0.35	1.6 - 12.7	0.06 - 0.50	1 (100 ft.)
SRPE-187-9-C	Natural	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 ft.)
SRPE-250-9-C	Natural	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 ft.)
SRPE-375-9-C	Natural	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 ft.)
SRPE-500-9-C	Natural	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 ft.)
SRPE-625-9-C	Natural	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 ft.)
SRPE-750-9-C	Natural	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 ft.)
SRPE-1000-9-C	Natural	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 ft.)
SRPE-125-0-C	Black	3.2	0.13	5.3	0.21	0.9	0.35	1.6 - 12.7	0.06 - 0.50	1 (100 ft.)
SRPE-187-0-C	Black	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 ft.)
SRPE-250-0-C	Black	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 ft.)
SRPE-375-0-C	Black	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 ft.)
SRPE-500-0-C	Black	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 ft.)
SRPE-625-0-C	Black	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 ft.)
SRPE-750-0-C	Black	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 ft.)
SRPE-1000-0-C	Black	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 ft.)


#### Tooling



#### CC120B

Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D. See page C131

#### Diagrams

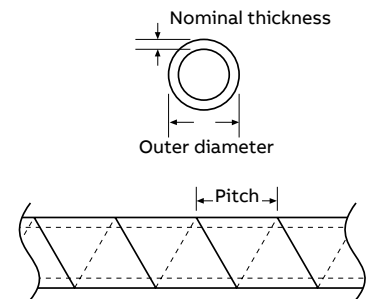

## Wire protection products

### Spiral wrap



#### Characteristics

- Install with gaps for greater flexibility or butted together for maximum abrasion resistance, insulation and rigidity
- Packaged in 100 foot reels
- Protects bundles from 0.063 in. to 7 in. (1.6 mm to 177.8 mm) diameters
- Also commonly known as reverse cut, left-handed cut or counter-clockwise cut

#### Technical information

- Material: Natural polyethylene, Weatherable black polyethylene or White flame-retardant polyethylene
- For general indoor use to 50°C (122°F).
- Flammability rating flame-retardant polyethylene: UL 94 V-0
- Material is flexible and easy to work with

### Spiral wrap

Cat. n°.	Colour	Outside diameter		Pitch	Nominal wall thickness		Bundle range		Reel Qty.	
		[mm]	[in.]		[mm]	[in.]	[mm]	[in.]		
SRPE-125F-9-C	Natural	4.8	0.19	6.1	0.24	1.0	0.04	1.6 - 12.7	0.06 - 0.50	1 (100 pi)
SRPE-187F-9-C	Natural	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 pi)
SRPE-250F-9-C	Natural	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 pi)
SRPE-375F-9-C	Natural	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 pi)
SRPE-500F-9-C	Natural	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 pi)
SRPE-625F-9-C	Natural	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 pi)
SRPE-750F-9-C	Natural	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 pi)
SRPE-1000F-9-C	Natural	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 pi)
SRPE-125F-0-C	Black	4.8	0.19	6.1	0.24	1.0	0.04	1.6 - 12.7	0.06 - 0.50	1 (100 pi)
SRPE-187F-0-C	Black	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 pi)
SRPE-250F-0-C	Black	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 pi)
SRPE-375F-0-C	Black	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 pi)
SRPE-500F-0-C	Black	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 pi)
SRPE-625F-0-C	Black	15.9	0.63	15.9	0.63	1.6	0.06	15.9 - 114.3	0.63 - 4.50	1 (100 pi)
SRPE-750F-0-C	Black	15.9	0.75	19.1	0.75	1.7	0.07	19.1 - 127.0	0.75 - 5.00	1 (100 pi)
SRPE-1000F-0-C	Black	25.4	1.00	28.2	1.11	1.8	0.07	25.4 - 177.8	1.00 - 7.00	1 (100 pi)
SRFR-187F-WH-C	White	4.8	0.19	6.1	0.24	1.0	0.04	3.2 - 38.1	0.13 - 1.50	1 (100 pi)
SRFR-250F-WH-C	White	6.4	0.25	9.5	0.38	1.1	0.05	4.8 - 50.8	0.19 - 2.00	1 (100 pi)
SRFR-375F-WH-C	White	9.5	0.38	11.1	0.44	1.3	0.05	8.0 - 76.2	0.31 - 3.00	1 (100 pi)
SRFR-500F-WH-C	White	12.7	0.50	14.3	0.56	1.6	0.06	9.5 - 101.6	0.38 - 4.00	1 (100 pi)


### Tooling



#### CC120B

Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D.  
See page C131

### Diagrams

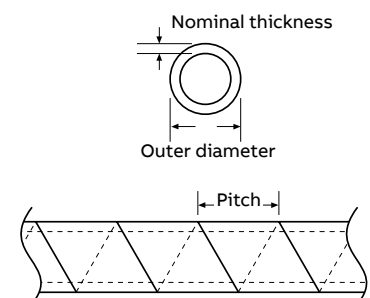

## Wire protection products

### Extruded grommeting



#### Characteristics

- Used to line panel edges and knockouts where the chafing of passing wires is a concern
- Available in 8 stock sizes in 100-ft. lengths for panels from 0.04 in. (1.02 mm) to 0.25 in. (6.35 mm) thick
- In most applications, grommeting will grip tightly by itself, if not, a touch of Epoxy will keep it in place

#### Technical information

- Material: Polyamide 6.6
- Temperature range: -40°C to +85°C (-40°F to +185°F)
- Colour: Natural or Black
- Flammability rating: UL 94 V-2
- Halogen free, Silicone free

### Extruded grommeting

Cat. n°.	Colour	ANSI UL94 Flame rating	Internal width A		Grommeting thickness C		Grommeting height D		Grommeting width B		Reel Qty. [pi]	
			[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[mm]	[in.]		[m]
GRNY-040-9-C	Natural	V-2	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-052-9-C	Natural	V-2	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-062-9-C	Natural	V-2	1.6	0.06	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-085-9-C	Natural	V-2	2.2	0.08	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-100-9-C	Natural	V-2	2.5	0.10	1.3	0.04	5.9	0.22	5.3	0.21	30.5	100
GRNY-125-9-C	Natural	V-2	3.8	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRNY-187-9-C	Natural	V-2	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRNY-250-9-C	Natural	V-2	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100
GRNY-040-0-C	Black	V-2	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-052-0-C	Black	V-2	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRNY-062-0-C	Black	V-2	1.6	0.06	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-085-0-C	Black	V-2	2.2	0.08	1.3	0.04	5.1	0.20	4.3	0.17	30.5	100
GRNY-100-0-C	Black	V-2	2.5	0.10	1.3	0.04	5.9	0.22	5.3	0.21	30.5	100
GRNY-125-0-C	Black	V-2	3.8	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRNY-187-0-C	Black	V-2	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRNY-250-0-C	Black	V-2	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100


### Tooling



#### CC120B

Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1½ in. I.D. See page C131

### Diagram



## Wire protection products

### Extruded grommeting



#### Characteristics

- Used to line panel edges and knockouts where the chafing of passing wires is a concern
- Available in 8 stock sizes in 100-ft. lengths for panels from 0.04 in. (1.02 mm) to 0.25 in. (6.35 mm) thick
- In most applications, grommeting will grip tightly by itself, if not, a touch of Epoxy will keep it in place

#### Technical information

- Material: Polyethylene
- Temperature range: -40°C to +85°C (-40°F to +185°F)
- Halogen free, silicone free

### Extruded grommeting

Cat. n°.	Colour	ANSI UL94 Flame rating	Max. panel thickness A		Grommeting thickness C		Grommeting height D		Grommeting width B		Reel Qty.	
			[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[mm]	[in.]	[m]	[ft.]
GRPE-040-9-C	Natural	HB	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRPE-052-9-C	Natural	HB	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRPE-062-9-C	Natural	HB	1.6	0.06	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRPE-085-9-C	Natural	HB	2.1	0.09	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRPE-100-9-C	Natural	HB	2.5	0.10	1.3	0.05	5.9	0.22	5.3	0.21	30.5	100
GRPE-125-9-C	Natural	HB	3.2	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRPE-187-9-C	Natural	HB	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRPE-250-9-C	Natural	HB	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100
GRUPE-040-0-C	Natural uncut	HB	1.0	0.04	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRUPE-052-0-C	Natural uncut	HB	1.3	0.05	1.0	0.04	4.8	0.19	3.2	0.13	30.5	100
GRUPE-062-0-C	Natural uncut	HB	1.6	0.06	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRUPE-085-0-C	Natural uncut	HB	2.2	0.09	1.3	0.05	5.1	0.20	4.3	0.17	30.5	100
GRUPE-100-0-C	Natural uncut	HB	2.5	0.10	1.3	0.05	5.9	0.22	5.3	0.21	30.5	100
GRUPE-125-0-C	Natural uncut	HB	3.2	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRUPE-187-0-C	Natural uncut	HB	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRUPE-250-0-C	Natural uncut	HB	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100
GRFR-040-WH-C	Flame-retardant white	V-0	1.0	0.04	1.0	0.04	4.8	0.19	3.1	0.13	30.5	100
GRFR-052-WH-C	Flame-retardant white	V-0	1.3	0.05	1.0	0.04	4.8	0.19	3.1	0.13	30.5	100
GRFR-062-WH-C	Flame-retardant white	V-0	1.6	0.06	1.3	0.05	5.1	0.20	4.2	0.17	30.5	100
GRFR-085-WH-C	Flame-retardant white	V-0	2.2	0.09	1.3	0.05	5.1	0.20	4.2	0.17	30.5	100
GRFR-125-WH-C	Flame-retardant white	V-0	3.2	0.13	1.3	0.05	5.9	0.22	5.2	0.20	30.5	100
GRFR-187-WH-C	Flame-retardant white	V-0	4.7	0.19	1.3	0.05	6.9	0.27	7.0	0.28	30.5	100
GRFR-250-WH-C	Flame-retardant white	V-0	6.4	0.25	1.3	0.05	7.1	0.28	9.4	0.37	30.5	100


### Tooling



#### CC120B


Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D. See page C131

### Diagram



## Wire protection products

### Braided sleeving

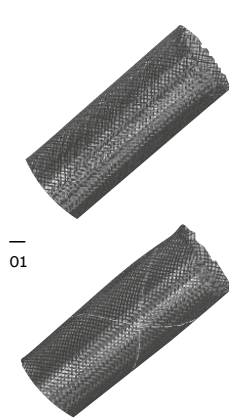

01

02

01 Polyethylene Terephthalate (P.E.T.)

02 F – Flame Retardant Polyethylene Terephthalate (P.E.T.)

#### Characteristics

The ABB braided wire protection sleeving is used to bundle and protect wires and cables from abrasion and excessive wear. Its flexible, lightweight, open weave construction installs easily over a variety of bundle diameters and shapes. The sleeving is resistant to chemicals, fungus, fuels, UV sunlight, and has an indefinite shelf life. It's easily cut with a hot knife, which seals the end, preventing fraying. Ends can be secured using Ty-Rap cable ties.

- Available in handy mini spools or bulk reels
- Eight sizes from 1/8 in. (3.18 mm) to 2 1/2 in. (63.5 mm) nominal I.D. size
- Solid or wraparound hook and loop braided expandable wire sleeving
- Meets UL94V-1
- Meets Federal Motor Vehicle Standard No. FMV SS 302

#### Technical information

##### Polyethylene terephthalate (P.E.T.)


- A black polyester monofilament material
- 0.010 in. (0.25mm)
- Designed for indoor and outdoor applications
- Continuous operating temp.: -75°C to 125°C (-103°F to 257°F).

#### Technical information

##### F – Flame Retardant polyethylene terephthalate (P.E.T.)


- Selfextinguishing polyester monofilament material
- 0.010 in. (0.25mm)
- Designed for indoor and outdoor applications
- It's provided in black with white tracer for identification
- Continuous operating temp.: -75°C to 125°C (-103°F to 257°F).
- Flammability rating.: UL 94V-1

#### Catalogue number system

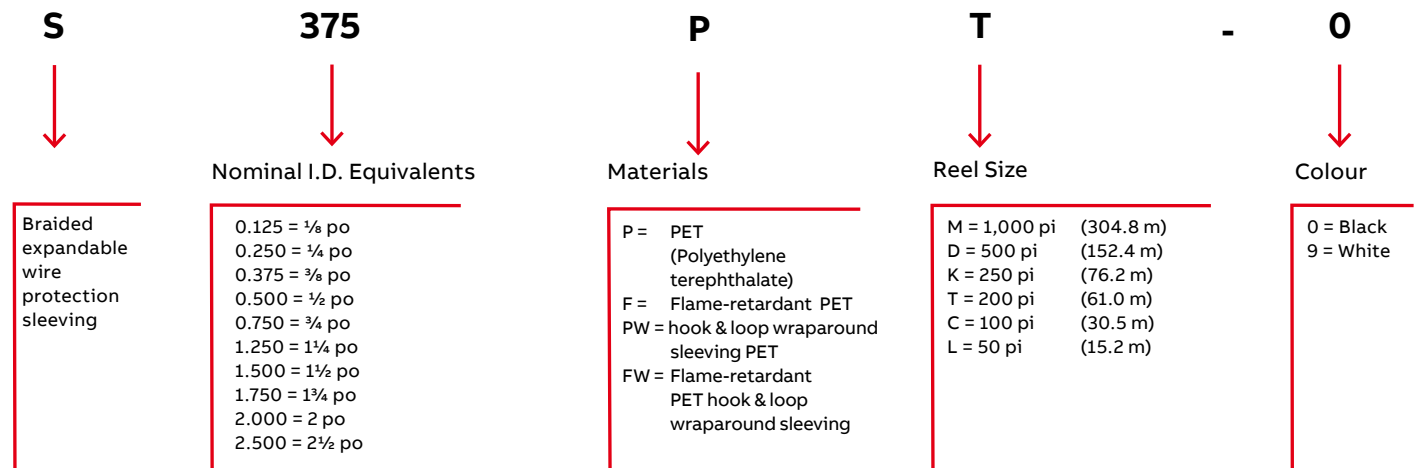

## Wire protection products

### Braided sleeving




#### P.E.T. Braided expandable wire sleeving – Mini spool



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S250PT-0	6.4	0.25	Black	3.2 - 9.5	0.13 - 0.38	61.0	200	1
S500PC-0	12.7	0.50	Black	6.4 - 19.1	0.25 - 0.75	30.5	100	1
S750PC-0	19.1	0.75	Black	12.7 - 31.8	0.50 - 1.25	30.5	100	1
S1250PL-0	31.8	1.25	Black	19.1 - 44.5	0.75 - 1.75	15.2	50	1

NOTE: Order by spool, not per foot.




#### Flame retardant braided expandable wire sleeving – Mini spool



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S250FT-0	6.4	0.25	Black with white tracer	3.2 - 9.5	0.13 - 0.38	61.0	200	1
S500FC-0	12.7	0.50	Black with white tracer	6.4 - 19.1	0.25 - 0.75	30.5	100	1
S750FC-0	19.1	0.75	Black with white tracer	12.7 - 31.8	0.50 - 1.25	30.5	100	1
S1250FL-0	31.8	1.25	Black with white tracer	19.1 - 44.5	0.75 - 1.75	15.2	50	1

NOTE: Order by spool, not per foot.



#### P.E.T. Hook and loop, wraparound sleeving – Mini spool



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S500PWL-0	12.7	0.50	Black	6.4 - 19.1	0.25 - 0.75	15.2	50	1
S750PWL-0	19.1	0.75	Black	12.7 - 31.8	0.50 - 1.25	15.2	50	1
S1250PWL-0	31.8	1.25	Black	19.1 - 44.5	0.75 - 1.75	15.2	50	1
S2000PWL-0	50.8	2.00	Black	38.1 - 88.9	1.50 - 3.50	15.2	50	1

NOTE: Order by spool, not per foot.

- No tools required to close the sleeving
- Hook and loop material is made of 100% polyamide



#### Flame retardant hook and loop, wraparound sleeving – Mini spool




Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S500FWL-0	12.7	0.50	Black with white tracer	6.4 - 19.1	0.25 - 0.75	15.2	50	1
S750FWL-0	19.1	0.75	Black with white tracer	12.7 - 31.8	0.50 - 1.25	15.2	50	1
S1250FWL-0	31.8	1.25	Black with white tracer	19.1 - 44.5	0.75 - 1.75	15.2	50	1
S2000FWL-0	50.8	2.00	Black with white tracer	38.1 - 88.9	1.50 - 3.50	15.2	50	1

NOTE: Order by spool, not per foot.



## Wire protection products

### Braided sleeving




#### P.E.T. Braided expandable wire sleeving – Bulk reel



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S125PM-0	3.2	0.13	Black	2.4 - 6.4	0.09 - 0.25	304.8	1,000	1
S250PM-0	6.4	0.25	Black	3.2 - 9.5	0.13 - 0.38	304.8	1,000	1
S375PD-0	9.5	0.38	Black	4.8 - 15.9	0.19 - 0.63	152.4	500	1
S500PD-0	12.7	0.50	Black	6.4 - 19.1	0.25 - 0.75	152.4	500	1
S750PK-0	19.1	0.75	Black	12.7 - 31.8	0.50 - 1.25	76.2	250	1
S1250PK-0	31.8	1.25	Black	19.1 - 44.5	0.75 - 1.75	76.2	250	1
S1500PT-0	38.1	1.50	Black	25.4 - 63.5	1.00 - 2.50	61.0	200	1
S1750PT-0	44.5	1.75	Black	31.8 - 59.9	1.25 - 2.36	61.0	200	1
S2000PT-0	50.8	2.00	Black	38.1 - 88.9	1.50 - 3.50	61.0	200	1
S2500PT-0	63.5	2.50	Black	44.5 - 114.3	1.75 - 4.50	61.0	200	1

NOTE: Order by spool, not per foot.



#### Flame retardant braided expandable wire sleeving – Bulk reel



Cat. n°.	Nominal I.D.		Colour	Nominal diameter range		Spool quantity		Std. pkg.
	[mm]	[in.]		[mm]	[in.]	[mm]	[ft.]	
S125FM-0	3.2	0.13	Black with white tracer	2.4 - 6.4	0.09 - 0.25	304.8	1,000	1
S250FM-0	6.4	0.25	Black with white tracer	3.2 - 9.5	0.13 - 0.38	304.8	1,000	1
S375FD-0	9.5	0.38	Black with white tracer	4.8 - 15.9	0.19 - 0.63	152.4	500	1
S500FD-0	12.7	0.50	Black with white tracer	6.4 - 19.1	0.25 - 0.75	152.4	500	1
S750FK-0	19.1	0.75	Black with white tracer	12.7 - 31.8	0.50 - 1.25	76.2	250	1
S750FK-9	19.1	0.75	White with black tracer	12.7 - 31.8	0.50 - 1.25	76.2	250	1
S1250FK-0	31.8	1.25	Black with white tracer	19.1 - 44.5	0.75 - 1.75	76.2	250	1
S1750FT-0	44.5	1.75	Black with white tracer	31.8 - 59.9	1.25 - 2.36	61.0	200	1
S1750FT-9	44.5	1.75	White with black tracer	31.8 - 59.9	1.25 - 2.36	61.0	200	1
S2000FT-0	50.8	2.00	Black with white tracer	38.1 - 88.9	1.50 - 3.50	61.0	200	1
S2500FT-0	63.5	2.50	Black with white tracer	44.5 - 114.3	1.75 - 4.50	61.0	200	1

NOTE: Order by spool, not per foot.

For other colours, lengths, sizes and materials, please Contact your Regional Sales Office.

## Wire protection products

### Tooling



Cat. n°.: CC120B

#### Characteristics

- Contoured handle resists tube crushing
- Produces no “sawdust” — no need to debur
- Lightweight, low-profile and no exposed blade when stored

#### Technical information

- Type: Cutting Tool
- High-carbon, Teflon® coated steel blade
- Cutting tool for all your spiral wrap, plastic pipe and PVC conduit needs up to 1¼ in. I.D.



Cat. n°.: WTBM

#### Characteristics

- It's recommended that the sleeving be cut with a hot knife for a straight cut and to seal the ends, which prevents fraying.

#### Technical information

- Type: Sleeving End Cutter/Sealer Tools
- 110 Volts-AC
- Benchmount End Cutter/Sealer Tool

