


Cat6/Cat6e 600 MHz Solid-Core Direct-Burial Outdoor-Rated UTP Bulk Ethernet Cable - Black, 1,000 ft. (304.8 m)

MODEL NUMBER: N228-01K-BK

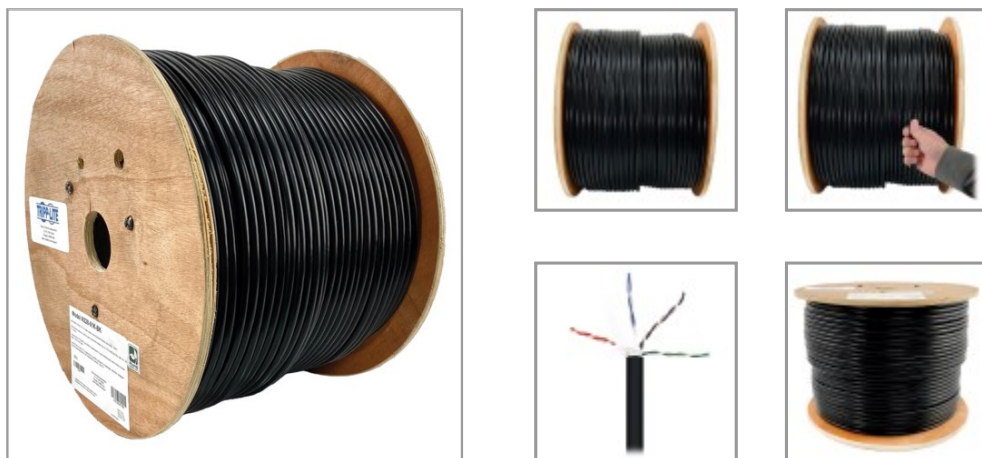

Premium high-speed Cat6/Cat6e cabling designed for outdoor data, voice, security and digital video across Gigabit Ethernet networks.

Features

Premium High-Speed Cat6 Cable for Outdoor Gigabit Ethernet Applications

This high-speed bulk cable is ideal for distributing data, voice, security and video communications across Gigabit Ethernet networks in outdoor applications, including mounted wireless antennas, surveillance cameras and digital signage. Designed for fast transmission and excellent signal quality, the N228-01K-BK ensures peak performance through your LAN.

Perfectly Constructed for Superior Performance

Manufactured from 23 AWG copper wire, this 1,000-foot (304.8-meter) roll of four-pair solid-core UTP cabling delivers speeds up to 600 MHz. The flexible UV-rated LDPE (low-density polyethylene) jacket resists drying and cracking, so it will stand up to exposure in sun, rain, wind and other weather conditions. It supports a temperature range of -40° to 167°F. Near-end crosstalk (NEXT) levels are held to a minimum, making the N228-01K-BK ideal for 100 Mbps TPDDI, 155 Mbps ATM, ISDN, voice, EIA/TIA and Token Ring Type 3 applications.

Highlights

- Recommended for outdoor Cat6/6e applications, including mounted wireless antennas
- 23 AWG 4-pair solid copper cable rated for 600 MHz/1 Gbps Ethernet speeds
- UV-rated LDPE jacket prevents drying and cracking in harsh weather environments
- Rated for outdoor temperatures ranging from -40° to 167°F (-40° to 75°C)

Applications

Connect Gigabit Ethernet network components in outdoor applications, such as digital signage and mounted wireless antennas

Package Includes

N228-01K-BK Cat6/6e Ethernet Cable, Black, 1,000 ft. (304.8 m)

Specifications

OVERVIEW	
UPC Code	037332257888
Technology	Cat6
PHYSICAL	
Cable Jacket Color	Black
Cable Jacket Material	LDPE



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Cable Jacket Rating	CMX
Cable Shielding	UTP
Number of Conductors	8 (4-Pair)
Conductor Material	Solid Copper
Cable Length (ft.)	1000
Cable Length (m)	304.88
Cable Length (in.)	12000
Shipping Dimensions (hwd / cm)	28.19 x 36.83 x 36.83
Shipping Dimensions (hwd / in.)	11.10 x 14.50 x 14.50
Shipping Weight (kg)	14.47
Shipping Weight (lbs.)	31.90
ENVIRONMENTAL	
Operating Temperature Range	-40 TO 167 F(-40 to 75 C)
Storage Temperature Range	-40 TO 167 F(-40 to 75 C)
COMMUNICATIONS	
Bandwidth per TIA Standard	500 MHz
Maximum Bandwidth as Tested	600 MHz
Network Compatibility	1 Gbps (Gigabit)
CONNECTIONS	
Side A - Connector 1	BARE WIRE
Side B - Connector 1	BARE WIRE
Crossover Wiring	No
Connector Type	Bare Wire
FEATURES & SPECIFICATIONS	
IP68 Rated	No
Snagless Connector	No
Antibacterial	No
IP20 Rated	No
STANDARDS & COMPLIANCE	
Product Compliance	RoHS; CE (Europe); REACH; FCC (USA)
WARRANTY	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Product Warranty Period (Worldwide)	Lifetime limited warranty
--	---------------------------

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:
<https://www.tripplite.com/products/product-certification-agencies>