
Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

400G Singlemode 9/125 OS2 Switchable Fiber Optic Cable (12F MTP/MPO-APC to 4x Duplex LC/UPC F/M), LSZH, Yellow, 1 m (3.3 ft.)

MODEL NUMBER: **N390X-01M-8L-AP**

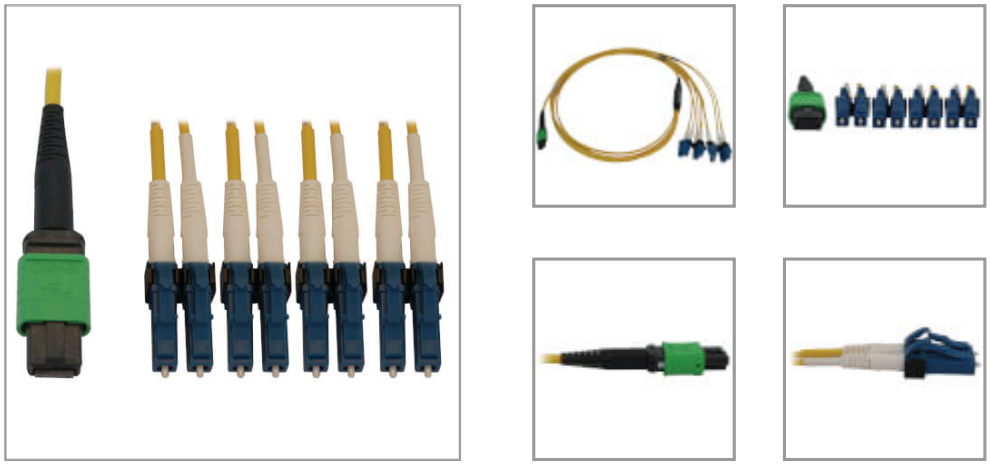

400 GbE Ethernet breakout cable supports high bandwidths necessary for enterprise applications in wiring closets, telecom rooms and data centers.

Highlights

- Switchable LC connectors allow polarity conversion without tools or re-termination
- MTP/MPO APC connector minimizes back reflection with low insertion loss
- Backward compatible with 10/25/40 Gb networks to facilitate future-proofing
- Yellow LSZH jacket allows fast, easy identification in a crowded switch or patch panel

Package Includes

N390X-01M-8L-AP 400G Singlemode 9/125 OS2 Switchable Fiber Optic Cable, Yellow, 1 m (3.3 ft.)

Features

40/100/400 GbE Cable Supports Higher Bandwidths for High-Density Data Networking
The N390X-01M-8L-AP is a premium multimode fiber optic cable that supports 400 Gb Ethernet speeds for transmitting data and voice signals over short distances. It is designed to support higher bandwidths for high-density patching between data center MDFs and IDFs in enterprise installations. This singlemode 9/125 OS2 cable is an ideal choice for 100 Gb Ethernet applications up to 100 meters (328 feet) at 1550 nm. The breakout cable also eliminates the need for long fan-out cables or long individual duplex cable runs.

Switchable Connectors Allow Easy Polarity Conversions
The switchable LC/UPC duplex ends let you easily switch the fiber polarity without tools or the need to re-terminate the connectors.

100% Tested for Low Insertion Loss and Back Reflection
The 12-fiber MTP/MPO APC connector with a green housing helps minimize back reflection with low insertion loss. The connector's slim boot is designed for easy cable management.

Yellow Jacket Helps Avoid Misidentification That Can Cause Costly Downtime
The OS2-rated cable has a yellow jacket to identify it as singlemode in a crowded patch panel or switch and prevent it from becoming accidentally disconnected. The round low-smoke zero-halogen (LSZH) jacket limits the amount of toxic smoke emitted in case of combustion, making it suitable for poorly ventilated areas.

Specifications

OVERVIEW	
UPC Code	037332272379

Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Technology	Fiber; Singlemode
Optical Mode	OS2
PHYSICAL	
Cable Jacket Color	Yellow
Connector Color	Blue; Green; Black
Cable Jacket Material	LSZH
Cable Jacket Rating	OFNR
Clad Diameter (microns)	125.0
Core Diameter (microns)	9.0
Primary Coating Diameter (microns)	245.0
Number of Fibers	2
Cable Length (ft.)	3.3
Cable Length (m)	1.01
Cable Length (in.)	39.4
Minimum Bend Radius	20MM (Dynamic); 10MM (Static)
ENVIRONMENTAL	
Operating Temperature Range	14 to 140 F (-10 to 60 C)
Storage Temperature Range	14 to 140 F (-10 to 60 C)
Relative Humidity	5 to 85% RH, Non-Condensing
COMMUNICATIONS	
Network Compatibility	10 Gbps; 40 Gbps; 100 Gbps; 400 Gbps
Wavelength	1310nm; 1550nm
Attenuation @ 1310NM	0.40 dB/KM
Attenuation @ 1550NM	0.30 dB/KM
Insertion Loss	0.70 dB
CONNECTIONS	
Side A - Connector 1	12-STRAND MTP/MPO (FEMALE)
Side B - Connector 1	(4) LC DUPLEX (MALE)
Endface Polish	APC; UPC
Switchable Polarity	Yes
FEATURES & SPECIFICATIONS	
Push/Pull Tabs	Yes

Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Optical Port	MPO/MTP
STANDARDS & COMPLIANCE	
Product Certifications	UL 1666
Product Compliance	RoHS; CE (Europe); REACH
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: https://www.tripplite.com/products/product-certification-agencies