
Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Fiber Optic Mode Conditioning Patch Cable (LC Mode Conditioning to SC), 3M (10 ft.)

MODEL NUMBER: **N425-03M**



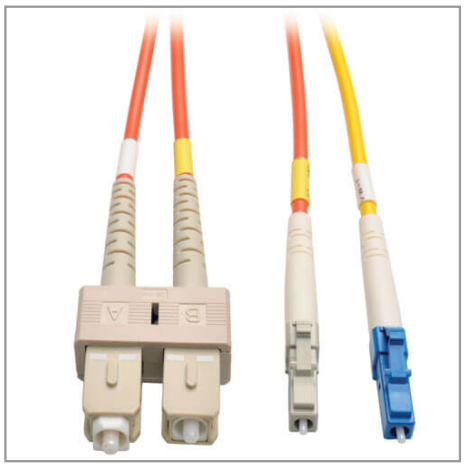

Highlights

- Converts Singelemode LC GBIC to Multimode SC Patch Panel
- 62.5/125 and 9/125
- Run 1000Base-LX Gigabit Ethernet over MMF by offsetting signal loss

Package Includes

- LC Mode Conditioning to SC Fiber Optic Patch Cable, 3M (10-ft.)

Features

- Use LC GBIC Singlemode Transceivers on Multimode Fiber Backbones with SC patch bays
- 62.5/125 and 9/125
- Offsets the Singlemode Laser launch from the center of a Multimode fiber
- Available in a variety of connector combinations

Specifications

OVERVIEW	
UPC Code	037332167798
Optical Mode	OM1
PHYSICAL	
Cable Jacket Color	Orange; Yellow
Connector Color	Beige; White; Blue
Cable Jacket Material	PVC
Cable Jacket Rating	OFNR
Clad Diameter (microns)	125
Core Diameter (microns)	62.5
Number of Fibers	2

Cable Length (ft.)	9.8
Cable Length (m)	2.99
Cable Length (in.)	118.1
Minimum Bend Radius	20MM (Dynamic); 10MM (Static)
Shipping Dimensions (hwd / cm)	17.78 x 22.86 x 1.27
Shipping Dimensions (hwd / in.)	7.00 x 9.00 x 0.50
Shipping Weight (kg)	0.06
Shipping Weight (lbs.)	0.14
ENVIRONMENTAL	
Operating Temperature Range	-4 to 140 °F (-20 to 60 °C)
Storage Temperature Range	-4 to 140 °F (-20 to 60 °C)
Operating Humidity Range	5% to 85% RH, Non-Condensing
Storage Humidity Range	35% to 65% RH, Non-Condensing
COMMUNICATIONS	
Attenuation @ 850NM	3.0dB/Km
Insertion Loss	MM TO MM0.20dB;MM TO SM0.30dB
CONNECTIONS	
Side A - Connector 1	LC DUPLEX (MALE)
Side B - Connector 1	SC DUPLEX (MALE)
Endface Polish	PC
FEATURES & SPECIFICATIONS	
Push/Pull Tabs	No
Breakout	No
Trunk	No
STANDARDS & COMPLIANCE	
Product Compliance	RoHS; REACH
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

https://www.tripplite.com/products/product-certification-agencies