


2kW 100-127V Single-Phase Basic PDU - 36 NEMA 5-15/20R Outlets, L5-20P Input (5-20P Adapter), 15 ft. Cord, 72 in. 0U Rack

MODEL NUMBER: PDUV20-72

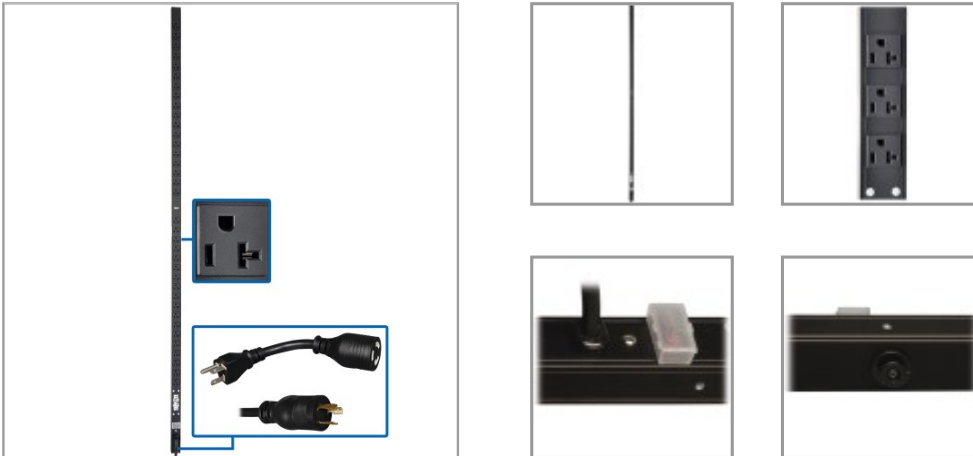

Delivers 120V single-phase AC power to multiple loads from a utility outlet, generator or UPS system in a data center or network closet.

Features

Single-Phase 100-127V PDU Distributes Network-Grade Power to Multiple Loads

This basic PDU is an ideal no-frills unit for networking, telecom, security, audio/video and sound reinforcement applications. Recommended for small to mid-sized data centers, computer rooms and network closets, the PDUV20-72 features 36 NEMA 5-15/20R outlets for connecting equipment. A 15-foot cord with L5-20P input plug (and included 5-20P adapter) connects to your facility's AC power source, generator or protected UPS system to distribute power to connected loads.

Up-to-Date Safety Features Protect Your Vital Equipment

A lighted on/off switch is protected by a transparent plastic cover to help prevent an accidental shutdown that could lead to costly downtime. A 20A circuit breaker protects connected components from dangerous overloads.

Versatile Installation Options Give You Plenty of Choices

The 72-inch 0U PDU mounts vertically in an EIA-standard 19-inch rack using the included toolless mounting buttons or the included mounting clips and hardware. You may also use the clips to secure the PDU to a wall, counter or other flat, secure surface. Bolt-down retention brackets keep power cords organized and your rack free of clutter.

Highlights

- Ideal no-frills PDU for telecom, security, audio/video and other network applications
- 36 NEMA 5-15/20R outlets distribute AC power to connected equipment
- Lighted power switch with protective cover helps prevent accidental shutdowns
- 15 ft. cord with L5-20P input (and 5-20P adapter) connects to AC power source
- 72 in. 0U PDU with included mounting brackets installs in rack or under counter

Applications

Deliver network-grade power to high-density equipment in networking, telecom, security, audio/video and sound reinforcement applications

Package Includes

- PDUV20-72 1.9kW 100-127V Single-Phase Basic PDU
- L5-20P to 5-20P input plug adapter
- Plug retention brackets with installation hardware
- Rack-mounting hardware
- Owner's manual

Specifications

| OVERVIEW | |
|----------|--------------|
| UPC Code | 037332255822 |
| PDU Type | Basic |
| INPUT | |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|--|---|
| PDU Input Voltage | 100; 120; 125; 127 |
| Recommended Electrical Service | Single-phase 20A 120V service |
| Maximum Input Amps | 16 |
| Maximum Input Amps Details | Agency de-rated to 16A continuous |
| PDU Plug Type | NEMA 5-20P; NEMA L5-20P |
| Input Phase | Single-Phase |
| Input Cord Length (ft.) | 15 |
| Input Cord Length (m) | 4.57 |
| OUTPUT | |
| Output Capacity Details | 2.03kW (127V), 1.92kW (120V), 1.6kW (100V) / 16A total capacity; 16A max per outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (36) 5-15/20R |
| Output Nominal Voltage | 100-127V |
| Overload Protection | 20A circuit breaker |
| USER INTERFACE, ALERTS & CONTROLS | |
| Switches | Lighted on/off switch with integrated transparent safety cover |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Aluminum |
| Form Factors Supported | Vertical |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / in.) | 2.40 x 6.65 x 75.79 |
| Shipping Weight (kg) | 3.48 |
| Unit Dimensions (hwd / in.) | 72.47 x 1.64 x 1.5 |
| Unit Dimensions (hwd / cm) | 184.1 x 4.2 x 3.81 |
| Unit Weight (lbs.) | 6.14 |
| Unit Weight (kg) | 2.79 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 0C ~ 40C (32F ~ 104F) |
| Storage Temperature Range | -30°C to +50°C (-22°F to +122°F) |
| Relative Humidity | 5-95% non-condensing |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|-------------------------------------|--|
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |
| STANDARDS & COMPLIANCE | |
| Product Certifications | CSA (Canada); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS |
| WARRANTY | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>