


8-Outlet Vertical Power Strip, 120V, 15A, 10 ft. (3.05 m) Cord, 5-15P, 24 in.

MODEL NUMBER: PS240810

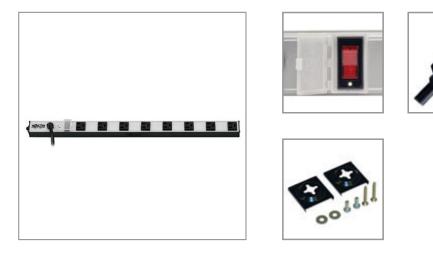

The PS240810 power strip provides horizontal or vertical power distribution for rackmount, raceway and workbench applications in a convenient 24-inch mountable housing.

Description

The PS240810 provides a 15-amp, 120v power strip with 8 standard NEMA 5-15 outlets in a rugged, allmetal, mountable housing. It allows for both vertical and horizontal mounting, making it ideal for a variety of uses including office, rackmount, workbench, industrial and telecom applications. With a NEMA 5-15P, 10-ft. (3.05 m) power cord, you don't have to install the PS240810 next to outlets you already have; it can be mounted across the room and deliver reliable service where you need it most. A lighted and covered On/Off switch helps prevent accidental shut-offs, while a 15-amp circuit breaker guards against dangerous circuit overloads. Its sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory or factory environments.

Features

Multi-Outlet Power Distribution:

Vertical or Horizontal Mounting:

Extra Long Power Cord:

Premium Safety Features:

Heavy-Duty Housing:

Specifications

Highlights

- Ideal for applications needing multiple convenience outlets for powering a variety of electronic equipment24-in mountable housing with 8 standard NEMA 5-15R outlets and a 10-ft. (3.05 m) power cord
- Lighted, covered On/Off switch and 15-amp circuit breaker
- Sturdy construction and heavyduty, all-metal housing

Package Includes

- PS240810
- Mounting hardware
- Instruction manual



Tripp Lite 1111 W. 35th Street Chicago, IL 60609 USA Telephone: 773.869.1234 www.tripplite.com

OVERVIEW		
UPC Code	037332187512	
INPUT		
Nominal Input Voltage(s) Supported	120V AC	
Recommended Electrical Service	15A 120V	
Input Cord Gauge Type	14 gauge; SJT	
Voltage Compatibility (VAC)	120	
Input Plug Type	NEMA 5-15P	
Input Cord Length (ft.)	10	
Input Cord Length (m)	3.05	
Integrated Cord Clip	No	
OUTPUT		
Frequency Compatibility	60 Hz	
Output (Watts)	1800	
Output Receptacles	(8) 5-15R	
Circuit Breaker (amps)	15	
Transformer Accommodation	(4) Yes	
Right-Angle Outlets	No	
Outlet Spacing	2.48 in.	
USER INTERFACE, ALERTS & CON	ITROLS	
Switches	Lighted 2 position switch controls power to all outlets	
Locking Switch Cover	Transparent on/off switch cover prevents accidental turn-off	
PHYSICAL		
Material of Construction	Aluminum	
Color	Silver	
Power Cord Color	Black	
Form Factors Supported	Supports vertical or horizontal mounting in rack enclosures, raceways and a variety of other applications	
Housing Color	Silver	
Included Mounting Accessories	Includes mounting clips	
Mounting Holes or Slots	No	
Outlets Measurement (Center to Center)	63mm	



[
Shipping Dimensions (hwd / cm)	6.35 x 11.68 x 71.63
Shipping Dimensions (hwd / in.)	2.50 x 4.60 x 28.20
Shipping Weight (kg)	1.32
Shipping Weight (lbs.)	2.90
Unit Dimensions (hwd / in.)	24.20 x 1.25 x 1.5
Unit Dimensions (hwd / cm)	61.97 x 3.18 x 3.8
Unit Weight (Ibs.)	2.16
Unit Weight (kg)	0.98
FEATURES & SPECIFICATIONS	
Antimicrobial	No
Built-In Circuit Breaker	Yes
STANDARDS & COMPLIANCE	
Product Certifications	cUL Listed; UL 1363; UL Listed
Product Compliance	RoHS
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: https://www.tripplite.com/products/product-certification-agencies