



**EXTREME® STANDARD TORCH KITS**

This line of kits has been the industry standard for decades. Reliable and well engineered, the standard line of kits combines our Extreme Swirl Technology with a traditional manual lighting torch. All tips feature quick disconnect couplings and color coded O-rings for gas identification.

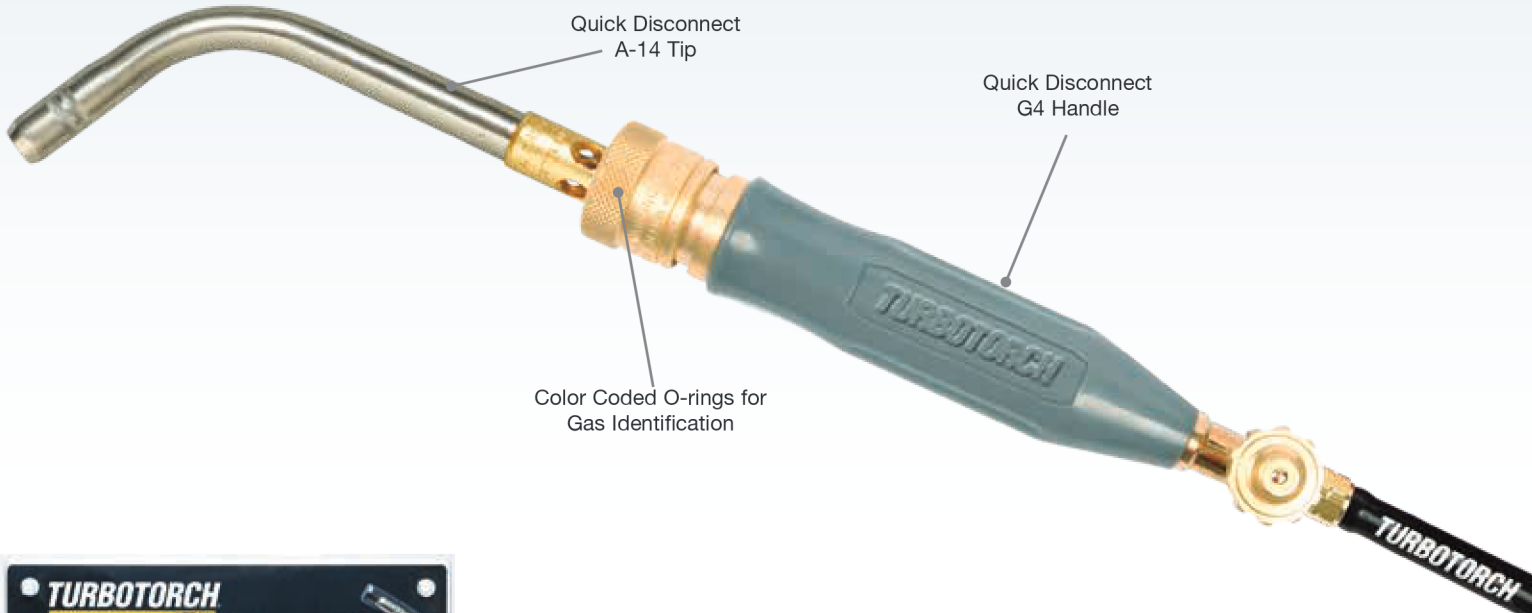

AIR ACETYLENE



**X-3B  
Torch Kit  
Part No. 0386-0335**

- Kit Includes:**
- AR-B (CGA 520) Regulator
  - G-4 Handle
  - AH-12 Hose
  - A-3 & A-11 Tips
  - Soft Solders to 3" (75 mm)
  - Silver Brazes to 1 5/8" (40 mm)
  - "B" Tank Connection
  - Instruction Manual



Kit No.	Part No.	Soft Solders	Silver Brazes	Regulator	Handle	Hose	Tips	Tank Connection	Valve Position
X-3B	0386-0335	3" (76 mm)	1 5/8" (41 mm)	AR-B (CGA-520)	G4	AH-12	A-3, A-11	B	Rear
X-4B	0386-0336	3 1/2" (89 mm)	2" (50 mm)	AR-B (CGA-520)	G4	AH-12	A-5, A-14	B	Rear
X-5B	0386-0338	1 1/2" (38 mm)	3/4" (19 mm)	AR-B (CGA-520)	G4	AH-12	A-5	B	Rear
X-5MC	0386-0384	1 1/2" (38 mm)	3/4" (19 mm)	AR-MC (CGA-200)	G4	AH-12	A-5	MC	Rear
X-6MC	0386-0339	2" (50 mm)	1" (25 mm)	AR-MC (CGA-200)	G4	AH-12	A-3, A-8	MC	Rear
MSKA-1	0386-0366	3" (76 mm)	3/4" (19 mm)	AR-B (CGA-520)	G4	AH-12	MSA-8	B	Rear



# EXTREME® STANDARD REPLACEMENT TIPS

A full series of manual lighting tips can be used with any Air Acetylene torch handle (PLF-A5 or G-4). Add range to your torch kit with economical tips that also feature a removable orifice screw.



**A-2**

Replacement Tip  
Part No. 0386-0100



**A-3**

Replacement Tip  
Part No. 0386-0101



**A-5**

Replacement Tip  
Part No. 0386-0102



**A-8**

Replacement Tip  
Part No. 0386-0103



**A-11**

Replacement Tip  
Part No. 0386-0104



**A-14**

Replacement Tip  
Part No. 0386-0105



**A-32**

Replacement Tip  
Part No. 0386-0106



**MSA-8**

Replacement Tip  
Part No. 0386-0365



**Combo Accessory Pro Pack**  
Part No. 0386-0577

**Pack Includes:**

- Air Acetylene Tips: A-8, A-5 and A-2 for use with Quick Disconnect Handles
- PL-812 Torch Shield 8" x 12" made with PyroSil™
- L-1 Flint Striker

**AIR ACETYLENE**

Replacement Tip No.	Tip Part No.	Tip Size	Soft Solders	Silver Brazes	Gas Flow		Replacement Orifice
					@14 PSI SCFH	(0.9 BAR) M3/HR	
<b>A-2</b>	0386-0100	1/8" (3.2 mm)	1/8" - 1/2" (3.2 - 13 mm)	1/8" - 1/4" (3.2 - 6.4 mm)	2.0	0.060	OR-A2
<b>A-3</b>	0386-0101	3/16" (4.8 mm)	1/4" - 1" (6.4 - 25 mm)	1/8" - 1/2" (3.2 - 13 mm)	3.6	0.108	OR-A3
<b>A-5</b>	0386-0102	1/4" (6.4 mm)	3/4" - 1½" (19 - 38 mm)	1/4" - 3/4" (6.4 - 19 mm)	5.7	0.171	OR-A5
<b>A-8</b>	0386-0103	5/16" (7.9 mm)	1" - 2" (25 - 50 mm)	1/2" - 1" (25 - 50 mm)	8.3	0.249	OR-A8
<b>A-11</b>	0386-0104	7/16" (11 mm)	1½" - 3" (38 - 76 mm)	7/8" - 1½" (22 - 41 mm)	11.0	0.330	OR-A11
<b>A-14</b>	0386-0105	1/2" (13 mm)	2" - 3½" (50 - 89 mm)	1" - 2" (25 - 50 mm)	14.5	0.435	OR-A14
<b>A-32</b>	0386-0106	3/4" (19 mm)	4" - 6" (102 - 152 mm)	1½" - 4" (38 - 102 mm)	33.2	0.996	OR-A32
<b>MSA-8</b>	0386-0368	3/8" (9.5 mm)	3/4" - 3" (19 - 76 mm)	1/4" - 3/4" (6.4 - 19 mm)	5.8	0.174	OR-A5