


# Agilent U2781A 6-slot USB Modular Instrument Chassis

## Data Sheet

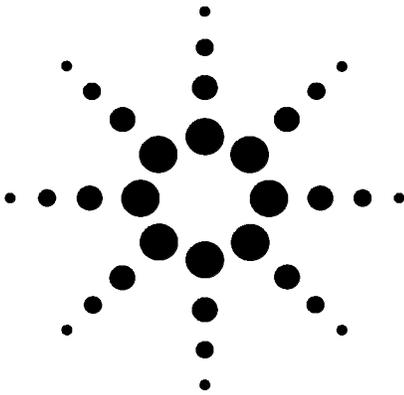

### Features

- **6 USB module slots**
- **System Synchronous Interface (SSI)**
- **Star trigger**
- **Internal and external 10 MHz reference clock**
- **Trigger in and trigger out signals**
- **SCPI commands**
- **IVI-COM driver compatibility**
- **USBTMC 488.2 Standards**
- **USB 2.0 high speed interface**
- **Rackmount kit available as an option**

### Introduction

Agilent U2781A USB modular instrument chassis is a 4 U high chassis with six USB module slots. This portable chassis provides housing for up to six Agilent U2300A Series USB modular multifunction data acquisition (DAQ) devices. This further expands Agilent's range in PC-based data acquisition solution, especially in the R&D, design validation and manufacturing fields as DAQ is widely used by engineers in those areas.

The U2781A modular chassis is an AC powered device and equipped with an external 10 MHz reference clock and external trigger in and trigger out functions.

### Easy to use

The USB 2.0 high speed interface enables the device to have a plug-and-play and hot swappable connectivity.

### High density data acquisition

The U2781A modular chassis allows an expansion of up to 384 channels when slotted with the U2300A Series DAQ

devices, providing a high density data acquisition solution.

### Triggering using star trigger bus

The U2781A USB modular instrument chassis comes with star trigger bus, which offers precise synchronization between USB modules and the external trigger signal. The star trigger bus comprises of dedicated trigger lines between the external trigger input and slotted USB modules. Users can also achieve precise triggering between each USB modules via the synchronized routing of the star trigger.

### System option

The U2781A modular instrument chassis has an optional mountable rackmount kit. This allows a better setup when it is integrated into a test system.

## ELECTRICAL SPECIFICATIONS

Power Supply AC Input	
Input voltage range	100 to 240 VAC
Input frequency range	50 to 60 Hz
Input current rating	3.5 A/115 VAC; 1.7 A/230 VAC
Efficiency	75%
Power Supply DC Output	
Output rated voltage	12 VDC
Max output rated current	16.7 A
Max output rated power	200 W
Overvoltage protection	13.2 to 16.2 V

Internal 10 MHz Reference Clock	
Accuracy	25 ppm for operating range
Slot-to-slot skew	350 ps
External 10 MHz Reference Clock	
Auto-detection level	Yes
Input frequency range	10 MHz
Input magnitude	100 mVpp to 5 Vpp (sine/square wave)
Input impedance	50 $\Omega$ $\pm$ 5 $\Omega$
Damage level	10 Vrms
External Trigger In	
Compatibility	TTL
V <sub>IH</sub> (Positive threshold voltage)	2.0 V
V <sub>IL</sub> (Negative threshold voltage)	0.8 V
Hold time	8 ns pulse width
Input voltage range	0 to 5.0 V
Slot-to-slot skew	350 ps
External Trigger Out	
V <sub>OH</sub>	2.9 V
V <sub>OL</sub>	0.1 V
Output voltage range	0 to 3.3 V

## MECHANICAL SPECIFICATIONS

Physical Layout	
Number of USB module slots	6
Dimension of each module slot	25.40 mm (W) x 174.54 mm (D) x 105.00 mm (H)
Dimension of chassis	270.00 mm (W) x 271.20 mm (D) x 197.00 mm (H)
Weight	3.7 kg
Power LED	ON/OFF type
USB Backplane	
Connector	55 pins Ernet male type C
Input signals	External 10 MHz clock in (BNC connector) External trigger in (BNC connector)
Output signal	Trigger out (BNC connector)
Cooling Fan	
Number of fans	2 (at the bottom of the chassis)
Fan speed	3300 rpm $\pm$ 10%
Noise	37 dB(A)
Power (each fan)	2.52 W

## GENERAL SPECIFICATIONS

### REMOTE INTERFACE

- USB 2.0 high speed
- USBTMC Class device

### POWER CONSUMPTION

- 400 VA maximum

### OPERATING ENVIRONMENT

- Operating temperature from 0 °C to +55 °C
- Relative humidity at 15% to 85% RH (non-condensing)
- Altitude up to 4600 meters

### STORAGE COMPLIANCE

- 20 °C to +70 °C

### SAFETY COMPLIANCE

Certified with:

- IEC 61010-1:2001/EN 61010-1:2001 (2nd Edition)
- USA: UL61010-1: 2004
- Canada: CSA C22.2 No.61010-1:2004

### EMC COMPLIANCE

Certified with:

- IEC/EN 61326-1 1998
- CISPR 11: 1990/EN55011:1991, Group 1, Class A
- CANADA: ICES-001: 1998
- Australia/New Zealand: AS/NZS 2064.1

### ACOUSTIC EMISSION

- Sound pressure level: 45.5 dB(A)
- Sound power level: 56.6 dB(A)

### SHOCK and VIBRATION

Tested to IEC/EN 60068-2

### DIMENSION (WxDxH)

270.00 mm x 271.20 mm x 197.00 mm

### WEIGHT

3.7 kg

### WARRANTY

One year

## SOFTWARE REQUIREMENT

### Agilent connectivity software included

Agilent IO Libraries Suite 14.2

### Minimum system requirements (IO libraries and drivers)


PC hardware	500 MHz Pentium III or higher, 256 MB RAM, 40 GB hard disk space, CD-ROM drive
Operating system	Windows 2000 or higher
Computer interface	USB 2.0 high speed

### Software driver support for programming languages


Software driver :	IVI-COM
Compatible with programming environments:	Agilent VEE Pro, Agilent T&M Toolkit Microsoft Visual Studio.NET, C/C++ Visual Basic 6 LabVIEW MATLAB

## PRODUCT OVERVIEW

### FRONT VIEW

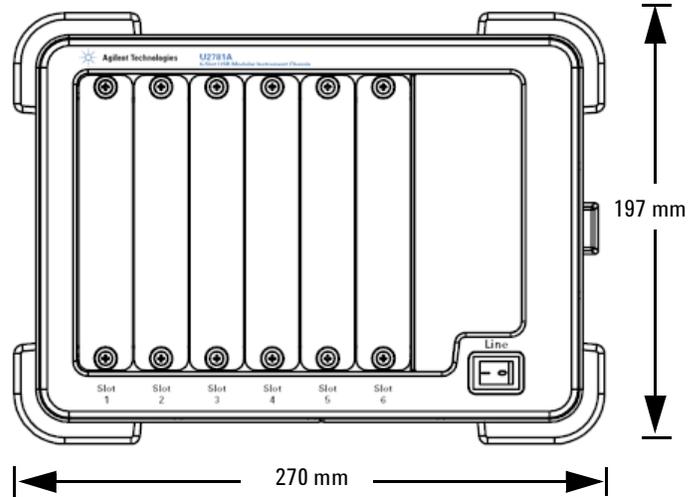

### REAR VIEW

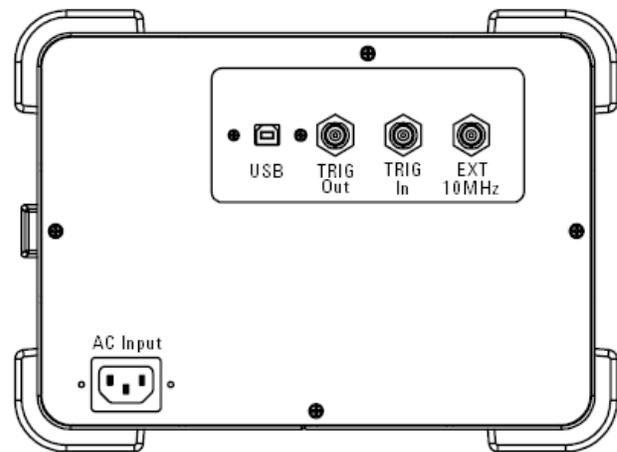

### Standard Shipped Components:

- USB interface cable
- Quick Start Guide
- Functional Test Certificate
- Product Reference CD
- Agilent IO Libraries Suite 14.2 CD

### Optional Accessories:

- U2905A rackmount kit for the U2781A 6-slot USB modular instrument chassis

### Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

#### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

#### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



#### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



#### Agilent Direct

[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)

Quickly choose and use your test equipment solutions with confidence.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

#### Phone or Fax

##### United States:

(tel) 800 829 4444

(fax) 800 829 4433

##### Canada:

(tel) 877 894 4414

(fax) 800 746 4866

##### China:

(tel) 800 810 0189

(fax) 800 820 2816

##### Europe:

(tel) 31 20 547 2111

##### Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

##### Korea:

(tel) (080) 769 0800

(fax) (080) 769 0900

##### Latin America:

(tel) (305) 269 7500

##### Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

##### Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2006

Printed in USA, 9 November, 2006

5989-5762EN



Agilent Technologies