LDA-802-32 Lab Brick® High Resolution Digital Attenuator

200 – 8000 MHz Frequency | 120 dB Attenuation Range | 0.1 Step Size

Features/Benefits

- Reliable and Repeatable solid state digital attenuation
- Includes GUI, Windows Linux and MAC SDK, LabVIEW driver
- Single shot or repeating programmable attenuation ramps
- Fading profiles programmable from GUI or SDK
- USB and Ethernet Control
- Configurable Static IP or DHCP
- Password protected Ethernet Interface
- Sized to fit into a single rack unit for ATE applications

Applications

- WiFi, WiFi6E, 3G, 4G, 5G, LTE, DVB, Microwave Radio Fading Simulators
- Engineering/Production Test Labs
- Automated Test Equipment (ATE)



The Lab Brick LDA series of Digital Attenuators bring affordability, functionality, reliability and simplicity to the microwave test bench. The LDA products range from 6 MHz to 40 GHz with input level tolerance to 2 Watts and step size as small as 0.1 dB.

The LDA-802-32 offers both USB and Ethernet interfaces. The USB port uses a native HID interface to avoid the difficulties inherent in using older serial or IEEE-488 interfaces implemented over USB. As a result, Lab Brick users can get to work faster without having to install kernel level drivers, and Lab Brick devices can be easily used on any system that supports USB HID devices, including low cost embedded computers using Linux or similar operating systems. The Ethernet interface is configurable for Static IP or DHCP with the ability to assign the HTTP port for extra security.

The LDA-802-32 Digital Attenuator is a rack mounted 32-channel high dynamic range, bidirectional, 50 Ohm step attenuator. The LDA-802-32 provides 120 dB of attenuation control range from 200 to 8000 MHz with a step size of 0.1 dB. The attenuators are easily programmable for fixed attenuation, swept attenuation ramps and user defined fading profiles directly from the included Graphical User Interface (GUI). Alternatively, for users wishing to develop their own interface, Vaunix supplies LabVIEW drivers, Windows API DLL files, Linux drivers, Python examples and much more.




LDA-802-32 Specifications


| Parameter | Test Conditions | Min | Тур | Мах |
|---------------------------|-----------------|-----|-------|------|
| Frequency Range (MHz) | | 200 | | 8000 |
| Impedance (Ω) | | | 50 | |
| Channels | | | 32 | |
| Attenuation Range (dB) | | 110 | 120 | |
| Step Size (dB) | | 0.1 | | |
| | < 2 GHz | | 5.5 | 7 |
| Insertion Loss (dB) | < 4 GHz | | 7 | 9 |
| | < 8 GHz | | 9 | 11 |
| | <30 dB | | 0.2 | 1 |
| | <60 dB | | 0.4 | 1.5 |
| Attenuation Accuracy (dB) | <90 dB | | 0.6 | 2.5 |
| | <110 dB | | 1 | 3 |
| | <120 dB | | 2 | 7 |
| Switching Speed (µs) | | | 2 | |
| Maximum Input Level (dBm) | Average/Peak | | 25/30 | |
| Input IP3 (dBm) | | 38 | 45 | |
| VSWR | | | 1.5:1 | |

| Parameter | Test Conditions/Notes | | | | |
|----------------------|---|--|--|--|--|
| Power Requirements | From the USB connection | +5 VDC 400 mA | | | |
| Environmental | Operating Temperature | -30 °C to +70 °C | | | |
| | Relative Humidity (non-condensing) | <95% | | | |
| | Power and Control | USB Type C – female | | | |
| Physical Connections | Control | USB Type C or Ethernet | | | |
| | RF Connectors | SMA – female | | | |
| Operating Modes | Manual Attenuation Control Swept Attenuation – uni/bi directional – one time/repeat User Defined Profile up to 1000 Attenuatio | n States | | | |
| Mechanical | Size (2RU) | 17 x 13 x 3.5 inches 431.8 x 330.2 x 88.9 millimeters | | | |
| | Weight | 11 lbs 5 kg | | | |




LDA-802-32 Performance Plots

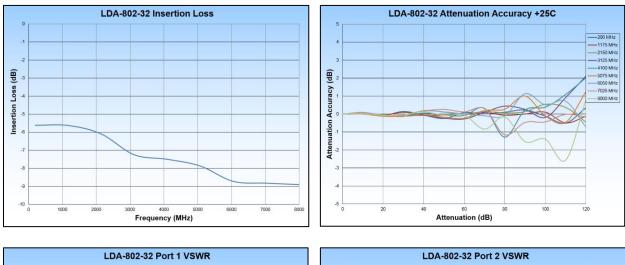

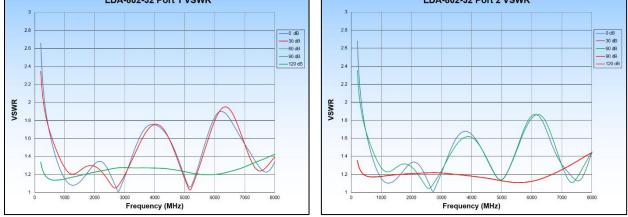




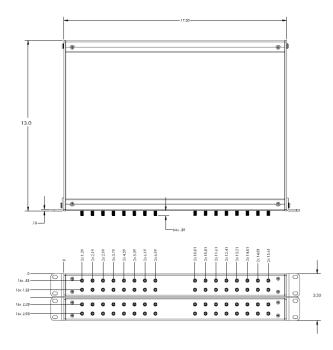

LDA-802-32 Software Interface

Windows GUI

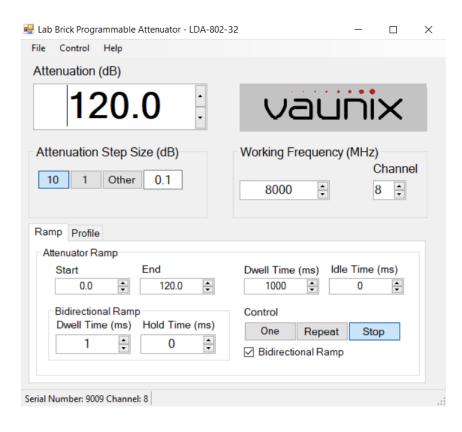



Ethernet GUI

| 4 55 100 | | | | | | | | | | | | |
|---|----------|----------|---------|-----------------------------------|------------------|----------|------|---|-----------|---------|---|--|
| Image: Im | | | unting | | | | | | | | | |
| Interview Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector Sector | | | | | | | | | | anh an | | |
| Applyme Late Applyme Late Control State Applyme State | Prequenc | -Y | 20 | 0 🐞 MH2 | (Valid range: 20 | 10-8000) | | | | SHLAII | | |
| Note with the state of | Attenuat | ion | 0. | 0.0 m dB (Valid range: 0.0-120.0) | | | | | (| Set All | | |
| Num 1 Set In In </td <td>Read (</td> <td>Config</td> <td>Apply C</td> <td>nangee</td> <td>Auto-Ref</td> <td>resh</td> <td></td> <td></td> <td></td> <td></td> <td></td> | Read (| Config | Apply C | nangee | Auto-Ref | resh | | | | | | |
| Num 1 Set In In </th <th>Atten</th> <th>uation S</th> <th>ettinas</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> | Atten | uation S | ettinas | | | | | | | | | |
| Set DD DD <thdd< th=""> DD DD DD<</thdd<> | | | Atten. | | | | | | Ramp Mode | | | |
| Image Image <th< td=""><td>1</td><td>Set</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Stop 🗸</td><td></td><td></td></th<> | 1 | Set | | | | | | | Stop 🗸 | | | |
| Image Image <th< td=""><td>2</td><td>Set</td><td>0.0</td><td>1.0</td><td>0.0</td><td>120.0</td><td>1000</td><td>0</td><td>Stop 💙</td><td>1</td><td>٥</td></th<> | 2 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | ٥ | |
| set non n | 3 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| image image <th< td=""><td>4</td><td>Set</td><td>0.0</td><td>1.0</td><td>0.0</td><td>120.0</td><td>1000</td><td>0</td><td>Stop 💙</td><td>1</td><td>D</td></th<> | 4 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| Image Image <th< td=""><td>5</td><td>Set</td><td>0.0</td><td>1.0</td><td>0.0</td><td>120.0</td><td>1000</td><td>0</td><td>Stop 🗸</td><td>1</td><td>D</td></th<> | 5 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 🗸 | 1 | D | |
| i i <td>6</td> <td>Set</td> <td>0.0</td> <td>1.0</td> <td>0.0</td> <td>120.0</td> <td>1000</td> <td>0</td> <td>Stop 💙</td> <td>1</td> <td>D</td> | 6 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| Image Image <th< td=""><td>7</td><td>Set</td><td>0.0</td><td>1.0</td><td>0.0</td><td>120.0</td><td>1000</td><td>0</td><td>Stop 💙</td><td>1</td><td>D</td></th<> | 7 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| Image Image <th< td=""><td>8</td><td>Set</td><td>0.0</td><td>1.0</td><td>0.0</td><td>120.0</td><td>1000</td><td>0</td><td>Stop 💙</td><td>1</td><td>D</td></th<> | 8 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| Image: set in the se | 9 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | ٥ | |
| 1 | 10 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| 11 10 100 | 11 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | ٥ | |
| 14 15 16 16 170 | 12 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | ٥ | |
| Image: set in the se | 13 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | ٥ | |
| Image: set in the set | 14 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| 1 1 1 0 0 1 0 0 1 0 0 1 0 0 1 0 0 1 0 1 0 1 0 1 0 1 0 1 0 | 15 | | 0.0 | | 0.0 | | 1000 | ٥ | | | D | |
| 18 19 10 10 10 120 100 </td <td></td> | | | | | | | | | | | | |
| Image Image <th< td=""><td></td><td></td><td>_</td><td></td><td>_</td><td></td><td></td><td></td><td></td><td></td><td></td></th<> | | | _ | | _ | | | | | | | |
| 20 54 100 100 200 100 | | | | | | | | | | | _ | |
| 21 Set 10 10 100 1200 100 0 100 | | | | | | | | | | | - | |
| 22 54 100 100 1200 1000 100 <td></td> | | | | | | | | | | | | |
| 3 54 10 10 00 1200 1000 0 1000 100 1000 | | | | | | | | | | | | |
| Add Set Ind Ind <td></td> | | | | | | | | | | | | |
| 25 54 0.0 1.0 0.0 120.0 1000 0.0 1000 </td <td></td> | | | | | | | | | | | | |
| 27 Set 0.0 1.0 0.0 1200 1000 0 Sec 1 0 28 Set 0.0 1.0 0.0 1200 1000 0 Sec 1 0 29 Set 0.0 1.0 0.0 1200 1000 0 Sec 1 0 | 25 | Set | | | | | | | | | | |
| 28 Set 0.0 1.0 0.0 120.0 1000 0 Set 0 1 0 29 Set 0.0 1.0 0.0 120.0 1000 0 Set 1 0 | 26 | Set | | | | | 1000 | | | | | |
| 20 Set 0.0 1.0 0.0 120.0 1000 0 950 V 1 0 | 27 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 🗸 | 1 | D | |
| | 28 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |
| 30 Set 0.0 1.0 0.0 120.0 1000 0 Stop ✔ 1 0 | 29 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | ٥ | |
| | 30 | Set | 0.0 | 1.0 | 0.0 | 120.0 | 1000 | 0 | Stop 💙 | 1 | D | |

