


2023

PROFESSIONAL INSULATED TOOLS



COMPLETE INSULATED PROGRAM

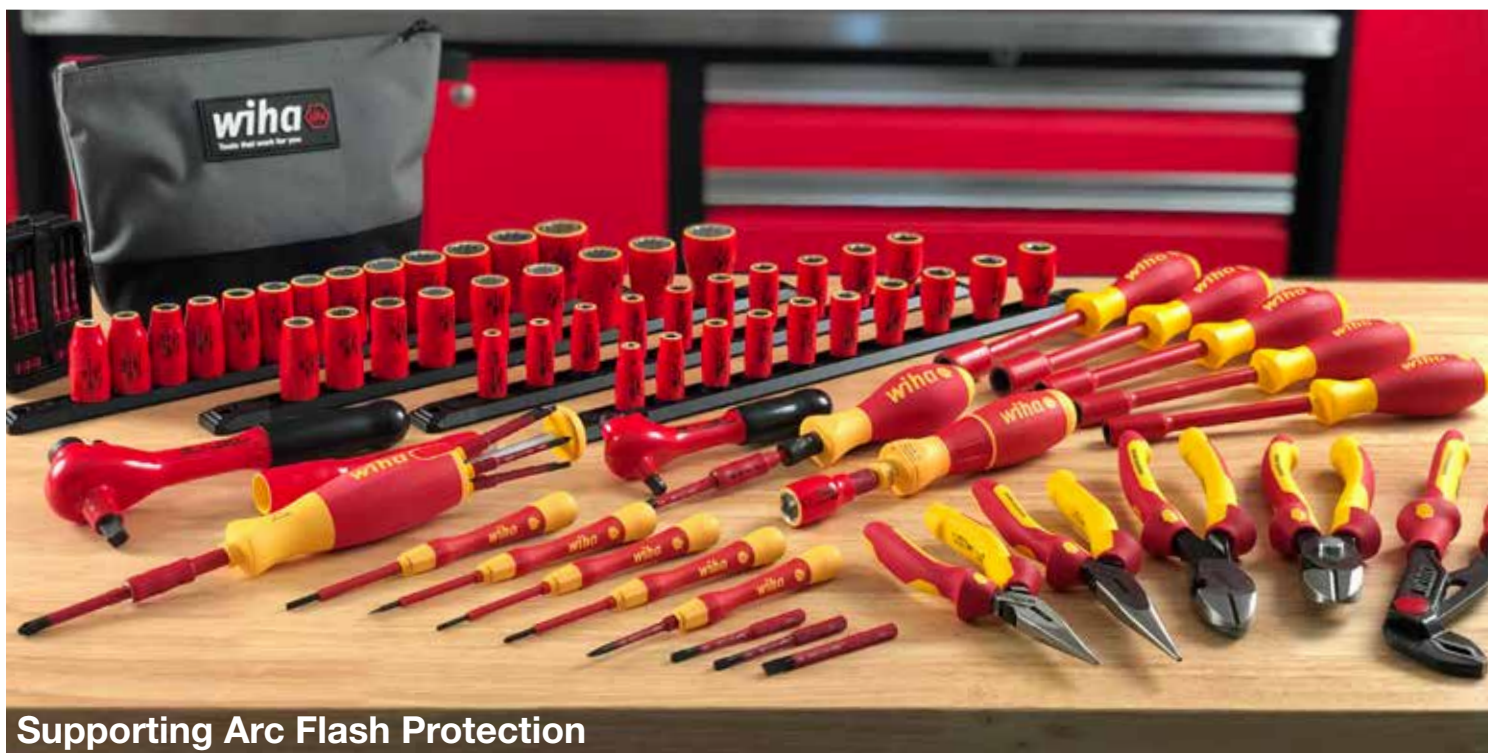

2 Tools that work for you

Arc Flash Protection:

Wiha Insulated tools can be a vital component in your Arc Flash protection strategy. What is Arc Flash?

ARC FLASH

An Arc Flash is an electrical explosion due to a fault condition or short circuit when either a phase to ground or phase to phase conductor is connected. Arc flashes cause electrical equipment to explode, resulting in an arc-plasma fireball. Temperatures may exceed 35,000° F (the surface of the sun is 9000° F). These high temperatures cause rapid heating of surrounding air and extreme pressures, resulting in an arc blast. The arc blast will likely vaporize all solid copper conductors which will expand up to 67,000 times its original volume when it is vaporized. The result of this violent event is usually destruction of the equipment involved, fire, and severe injury or death to any nearby people.

WHY ARC FLASHES HAPPEN

There are a variety of reasons why an Arc Flash can occur, but most of them are preventable. Most arc flashes occur when maintenance workers are manipulating live equipment for testing or repair and accidentally cause a fault. Improper tools, improper electrical equipment, corrosion of equipment, improper work techniques and lack of training are just some of the events that can lead to a devastating arc flash or arc blast.

ARC FLASH COMPLIANCE

There are 4 main regulations that govern electrical safety & arc flash:

1. OSHA Standards 29CFR, Part 1910. Occupational Safety and Health Standards. 1910 sub part S (electrical) Standard number 1910.333 specifically addresses Standards for Work Practices and references NFPA 70E. OSHA 29CFR 1910.335 (a) (1)(i) requires the use of protective equipment when working where a potential electrical hazard exists and 29CFR 1910.132(d)(1) which requires the employer assess the workplace for hazards and the need for personal protective equipment. OSHA compliance is required by any plant building or facility.
2. The National Fire Protection Association (NFPA) Standard 70 - 2002 "The National Electrical Code" (NEC) contains requirements for warning labels.
3. NFPA 70E provides guidance on implementing appropriate work practices that are required to safeguard workers from injury while working on or near exposed electrical conductors or circuit parts that could become energized. Part II 2-1.3.3 regarding Arc Flash Analysis states that a "Flash Hazard Analysis shall be done before a person approaches any exposed electrical conductor or circuit part that has not been placed in an electrical safe work condition". This Arc Flash Hazard Analysis must be done to determine the level of Personal Protection Equipment PPE that a worker must use, and the Arc Flash Boundary in inches along with the incident energy found at each location. Each panel must be marked with an ANSI z535 approved Arc Flash Warning Label.
4. The Institute of Electronics and Electrical Engineers (IEEE) 1584 - 2002 Guide to Performing Arc-Flash Hazard Calculations

copyright © information by: American Trainco, Inc.
http://www.martinarcflash.com

OSHA

Wiha tools assists with compliance of OSHA 29CFR 1910 (Sub Parts electrical standard)


Wiha Insulated Tools

Description		Page
	Insulated Slotted Drivers	4-6
	Insulated Phillips Drivers	4-6
	Insulated Square Tip	5-6
	Insulated Pozidriv®	7
	Xeno Terminal Block	7
	Insulated Hex Drivers	8
	Insulated Torx® Drivers	8
	Insulated Nut Drivers	9
	Voltage Detectors	6

Wiha Insulated PicoFinish® Screwdrivers

Description		Page
	Insulated PicoFinish® Drivers	11
	Insulated PicoFinish® Sets	11

Wiha Insulated SlimLine Tools

Description		Page
	Insulated SlimLine Drivers	10
	Insulated SlimLine Driver Sets	10-11
	Insulated SlimLine Blades	12
	Insulated SlimLine Handles	13
	Insulated SlimLine Blade Sets	14

Wiha Insulated Pop-Up SlimLine Blade Sets

Description		Page
	Insulated Pop-Up Sets	14

Wiha speedE II Electric Screwdriver

Description		Page
	speedE II Screwdriver	14

Wiha Insulated TorqueControl Tools

Description	Page
 Insulated Torque Ratchet	16
 Insulated TorqueControl Handle & Blade Holder	15-16 15

Wiha Insulated Pop-Up Insert Bit Sets

Description	Page
 Insulated Pop-Up Sets	17

Wiha Insulated Pop-Up Insert Bit Sets

Description	Page
 Switch Cabinet Keys	17

Wiha Insulated Tool Sets

Description	Page
 Insulated Tool Sets	18

Wiha Insulated EV Tool Kit

Description	Page
 EV Tool Kit	19

Wiha Insulated Sets in Foam Tray

Description	Page
 Foam Tray Sets	20

Wiha Insulated Industrial Pliers/Cutters

Description	Page
 Ins. Industrial Pliers/Cutters	21-25
 Insulated Industrial Sets	21-25

Wiha Insulated Hex T-handle Drivers

Description	Page
 Insulated Hex T-handle	26


Wiha Insulated Hacksaw

Description	Page
 Insulated Hacksaw	27

Wiha Insulated Cable Cutters & Pliers

Description	Page
 Insulated Cable Cutters	27


Wiha Insulated Tweezers

Description	Page
 Insulated Tweezers	28

Wiha Insulated 3/8" Hex Drive Bit Sockets

Description	Page
 Ins. Hex Drive Bit Sockets	28


Wiha Insulated Socket Accessories

Description	Page
 Insulated Sockets 1/4, 3/8, 1/2"	29-32
 Insulated Ratchets	29-32
 Insulated T-handle	29-32
 Insulated Extension Bars	29-32

Wiha Insulated L-keys

Description	Page
 Insulated L-keys	33

Wiha Insulated Wrenches

Description	Page
 Insulated Open End Spanners	34
 Insulated Ratchet Wrenches	35
 Ins. Offset Ring Wrenches	36

Wiha Insulated Adjustable Wrenches

Description	Page
 Insulated Adjustable Wrenches	37 8.0, 10.0, 12.0, 15.0"

Wiha Insulated Electrician's Knives

Description	Page
 Insulated Knives	37

Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505, New VDE 0682/part 201, DIN 7437, NFPA70E & CSA

Responds to OSHA's use specification 29 CFR1910



SoftFinish® handle
Solid molded core with soft outer cushion grip. 40% more torque than conventional handles

Insulation Molded directly onto the blade for permanent bonding

Blade CVM tool steel, hardened to average 58/60RC



Each tool individually tested to 10,000 volts and rated to 1000 Volt ac or 1500 Volt dc



1000Volt

320 Slotted Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested.

Item No.	mm	Inch	Inch	mm	Inch	mm	Inch	lbs.
32005	2.0	.078	5/64	60	3.0	164	6.5	.05
32010	2.5	.098	3/32	75	3.0	179	7.1	.06
32012	3.0	.118	1/8	100	4.0	204	8.0	.07
32015	3.5	.139	9/64	100	4.0	204	8.0	.07
32017	4.0	.157	5/32	100	4.0	211	8.3	.12
32023	4.5	.177	3/16	100	4.0	211	8.3	.12
32024	4.5	.177	3/16	125	5.0	236	9.3	.12
32027	4.5	.177	3/16	150	6.0	261	10.2	.14
32025	4.5	.177	3/16	175	7.0	286	11.2	.13
32031	5.5	.216	7/32	125	5.0	243	9.5	.15
32026	5.5	.216	7/32	175	7.0	293	11.5	.21
32034	6.0	.236	15/64	150	6.0	268	10.6	.21
32039	6.5	.255	1/4	150	6.0	268	10.6	.21
32042	8.0	.315	5/16	175	7.0	299	11.8	.34
32045	10.0	.393	3/8	200	8.0	318	12.5	.39



1000Volt

32105 2 Piece Slotted & Phillips Set
Item 1000 Volt Slotted: 5.5
No. 1000 Volt Phillips: #2
32105 lbs. .50



1000Volt


33532 2 Piece Slotted & Phillips Set
Item 1000 Volt Slotted: 6.0
No. 1000 Volt Phillips: #2
33532 lbs. .50



1000Volt

321 Phillips Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested.

Item No.	Size	mm	Inch	mm	Inch	lbs.
32100	0	60	2.4	164	6.5	.06
32101	1	80	3.0	191	7.5	.12
32102	2	100	4.0	218	8.6	.20
32103	3	150	6.0	268	10.6	.34

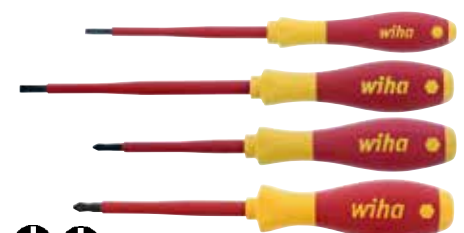


1000Volt

32090 4 Piece Slotted & Phillips Set
Item No. 1000 Volt Slotted: 3.5, 4.5
32090 1000 Volt Phillips: #1, 2
lbs. .76

Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle

PRO-PICK

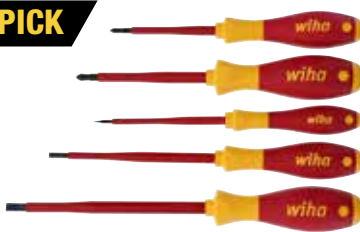

 **1000Volt**

32084	5 Piece Slotted & Phillips Set
Item	↓  Slotted: 3.5, 4.5, 6.5mm
No.	 Phillips: #1, 2
32084	 lbs. 1.31



 **1000Volt**

32092	6 Piece Slotted & Phillips Set
Item No.	↓  Slotted: 3.5, 4.5, 6.5
32092	 Phillips: #1, 2, 3
	 lbs. 1.38



 **1000Volt**

32093	10 Piece Slotted & Phillips Set
Item No.	↓  Slotted: 2.0, 2.5, 3.0, 3.5, 4.5, 6.5
32093	 Phillips: #0, 1, 2, 3
	 lbs. 1.63



 **1000Volt**

32091	5 Piece Slotted & Phillips Set
Item	↓  Slotted: 3.0, 4.5, 6.5mm
No.	 Phillips: #1, 2
32091	 lbs. 1.31



 **1000Volt**

32099	7 Piece Slotted & Phillips Set In Clamshell
Item	↓  Slotted: 3.5, 4.0, 5.5, 6.5mm
No.	 Phillips: #1, 2, 3
32099	 lbs. 1.60



 **1000Volt**

32094	13 Piece Slotted & Phillips Set
Item No.	↓  Slotted: 2.0, 2.5, 3.0, 3.5, 4.5, 5.5, 6.5, 8.0, 10.0mm
32094	 Phillips: #0, 1, 2, 3
	 lbs. 2.3

Wiha Insulated Square Tip Screwdrivers



 **1000Volt**

358 Square Tip Screwdriver, With Wiha-SoftFinish® Handle Insulation According to ASTM, VDE, EN/IEC, NFPA70E and CSA,  up to 1000 Volt. Individually Tested. Blade high alloy CVM steel, hardened, black finish.

Item No.					Size mm	Inch	mm	Inch	lbs.
35811					1	100	4.0	210	8.2 .12
35812					2	150	6.0	268	10.5 .19



 **1000Volt**


35891	6 Pc. Insulated Slotted, Phillips and Square Screwdrivers
Item No.	Slotted: 3.0, 5.5mm 
35891	Phillips: #1, 2 lbs.
	Square: #1, 2 .83

PRO-PICK




 **1000Volt**

32097	7 Piece Slotted, Phillips & Square Set In Clamshell
Item	↓  Slotted: 3.5, 5.5, 6.5mm
No.	 Phillips: #1, 2
32097	 Square: #1, 2
	 lbs. 1.60

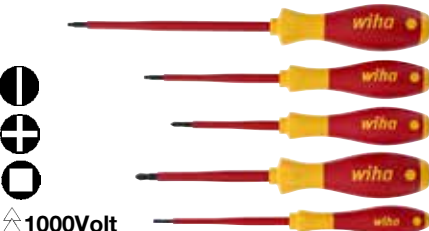

 **1000Volt**

32083	5 Piece Slotted, Phillips & Square Set
Item	Slotted: 3.5mm
No.	Phillips: #1, 2
32083	Square: #1, 2
	 lbs. 1.31

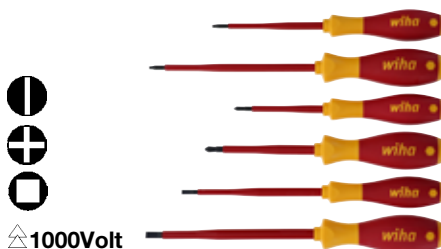

 **1000Volt**

35890	6 Pc. Insulated Slotted, Phillips and Square Screwdrivers
Item No.	Slotted: 4.5, 6.5mm 
35890	Phillips: #1, 2 lbs.
	Square: #1, 2 .83

Wiha Insulated Screwdriver Sets



Tool box set in blow molded tray

1000Volt

32095 19 Piece Slotted, Phillips, Square, Xeno Screwdriver Set

Insulated Screwdriver set in a light weight tool box tray.

Item No. Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm

Phillips: #0, #1, #2, #3

Square: #1, #2

lbs. Xeno Terminal: #1, #2

4.92 Cat. III Voltage Detector - (Battery Operated)



1000Volt

32188 7 Piece Slotted & Phillips Set

Item No.

32188

Slotted: 2.0, 2.5, 3.0, 3.5, 4.0

Phillips: #0, 1

lbs. .92



1000Volt

32192 14 Piece Slot/Phil/Inch Nut Drivers & Pliers/Cutters Set

Item No. Slotted: 3.0, 4.5, 6.5mm

32192 Phillips: 1, 2

Nut Drivers SAE: 1/4, 5/16, 11/32, 3/8, 1/2"

5.5 8.0" Combo Pliers, 6.3" Diagonal Cutters

6.3 & 8.0" Long Nose Pliers/Cutters

Cat. IV Voltage Detector - Battery Operated



1000Volt

25505 Battery Operated Voltage Detector Tests 50-1000 Volts. Category IV, CE IEC 61010-1 With audible sound and light warnings. (Requires 2 AAA batteries).

Item No. mm Inch lbs.

25505 146 5.75 .13

Cat. IV Voltage Detector - Battery Operated

Audible alarm signal is variable for indicating voltage strengths

Visual voltage strength meter for precise voltage location



25506 Voltage Detector 12-1000V AC Rated. Non-Contact Category IV Single-Pole Red LED & audible alarm indicate present voltage (Includes 2 AAA batteries)

Item No. mm Inch lbs. In

25506 152 6.0 .50 Clamshell

Insulated Single-Pole Voltage Detector



1000Volt

25511 Insulated Single-Pole Voltage Detector. 110-250Volts. Insulation According To DIN 57860/6 And DIN VDE 0680-6, GS Tested. Blade CVM steel, hardened, nickel-plated. Insulation molded directly onto blade. Amber LED light. 10,000Volt tested.

Item No. mm mm mm Inch lbs.

25511 3.0 65 145 5.7 .04

1000Volt



32190 15 Piece Slotted, Phillips & Inch Nut Drivers Set

Item No. Slotted: 2.0, 2.5, 3.0, 3.5, 4.5, 6.5, 8.0mm

32190 Phillips: #1, 2, 3

lbs. Nut Drivers SAE: 1/4, 5/16, 3/8, 7/16, 1/2"

5.9



1000Volt

32087 7 Pc. Slotted, Phillips, Square & Voltage Detector Set

Item Slotted: 4.0, 5.5, 6.5mm

No. Phillips: #1, #2

32087 Square: #2

Ins. Single Pole Voltage Detector

lbs. 1.36

Wiha Insulated Pozidriv® Screwdrivers




⊕ 1000Volt

324 Pozidriv® Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested.

Item No.	Size	mm	mm	Inch	lbs.
32400	0	60	164	6.5	.11
32401	1	80	191	7.5	.13
32402	2	100	218	8.6	.23
32403	3	150	267	10.5	.30

Insulated Terminal Block Xeno Screwdrivers



Combination Slotted/Phillips Terminal Block Drivers

Slotted/Phillips or Slotted/Pozidriv®

⊕ 1000Volt



⊕ Slotted/Phillips

307 Combination Terminal Block Xeno Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested. Blade CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip. For combination Slotted/Phillips head terminal screws.

Item No.	Size	mm	mm	Inch	lbs.
30700	1	80	191	7.5	.13
30701	2	100	218	8.6	.23




⊕ Slotted/Pozidriv®

307 Combination Terminal Block Xeno Screwdriver, With Wiha SoftFinish® Handle. Insulation According to ASTM F-1505, VDE, 0682/part 201, EN/IEC 60900, NFPA70E & CSA specification. Individually Tested. Blade CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip. For combination Slotted/Pozidriv® head terminal screws.

Item No.	Size	mm	mm	Inch	lbs.
30711	1	80	191	7.5	.12
30712	2	100	218	8.6	.21

Wiha Insulated Screwdrivers

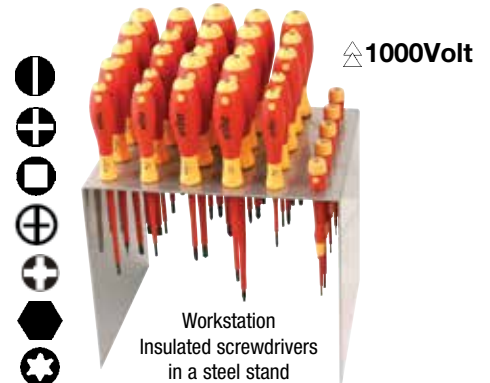

⊕ 1000Volt

32199 30 Pc. Workstation Insulated Screwdriver Set

Item No.	Slotted: 3.5, 4.0, 4.5, 5.5, 6.5mm
32199	Phillips: #1, #2, #3
	Pozidriv®: #1, #2
lbs.	Square: #1, #2
8.50	Xeno Terminal Slit/Ph: #1, #2
	Hex METRIC: 2.5, 3.0, 4.0, 5.0, 6.0mm
	TORX®: T8, T10, T15, T20, T25, T30
	PicoFinish Slotted: 1.5, 2.0, 2.5mm
	PicoFinish Phillips: #00, #0

Insulated Drivers & Voltage Detector Sets



⊕ 1000Volt

32089 9 Pc. Slotted, Phillips, Square & Voltage Detector Set In Molded Carry Case

Item No.	Slotted: 3.5, 4.0, 4.5, 5.5mm
	Phillips: #1, #2
32089	Xeno Slit/Ph: #1, #2
	Ins. Single Pole Voltage Detector
	lbs. 1.81

Wiha Insulated Hex Metric Screwdrivers



⚡ 1000Volt

323 Hex METRIC Screwdriver, With Wiha-SoftFinish® Handle

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, ⚡ up to 1000 Volt. Individually Tested Blade high alloy CVM steel, hardened, black finish. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Size	mm	Inch	mm	Inch	lbs.
32302	2.5	75	3.0	179	7.0	.06
32303	3.0	75	3.0	179	7.0	.08
32304	4.0	75	3.0	186	7.3	.12
32305	5.0	75	3.0	186	7.3	.15
32306	6.0	100	3.9	218	8.6	.24
32308	8.0	100	3.9	218	8.6	.34

Wiha Insulated TORX® Screwdrivers




⚡ 1000Volt

325 TORX® Screwdriver, With Wiha-SoftFinish® Handle

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E and CSA, ⚡ up to 1000 Volt. Individually Tested. Blade high alloy cvm steel, hardened, black finish. Insulation molded directly onto blade.

Item No.	Size	mm	Inch	mm	Inch	lbs.
32505	T5	60	2.4	164	6.5	.06
32511	T6	60	2.4	164	6.5	.06
32516	T7	60	2.4	164	6.5	.06
32521	T8	60	2.4	164	6.5	.06
32526	T9	60	2.4	164	6.5	.06
32531	T10	60	2.4	164	6.5	.06
32536	T15	80	3.0	191	7.5	.12
32541	T20	80	3.0	191	7.5	.12
32546	T25	80	3.0	198	7.8	.17
32551	T27	100	4.0	218	8.6	.20
32556	T30	100	4.0	218	8.6	.20

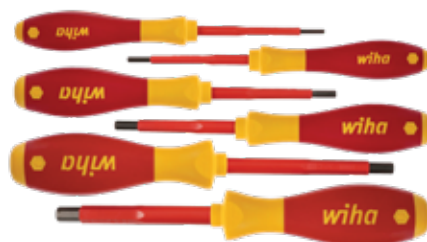

⚡ 1000Volt

32366 6 Piece Insulated Hex METRIC Screwdriver Set

Item No.	Hex METRIC:
32366	2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	⚡ lbs. 1.06



⚡ 1000Volt

32590 6 Piece TORX® Set

Item No.	TORX:
32590	T8, T9, T10, T15, T20, T25
	⚡ lbs. .83



⚡ 1000Volt

32592 10 Piece TORX® Set

Item No.	TORX: T6, T7,	lbs.
32592	T8, T9, T10, T15,	
	T20, T25, T27, T30	1.2

Wiha Insulated METRIC & SAE Nut Drivers



322 METRIC Nut Drivers, With Wiha-SoftFinish® Handle Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, Δ up to 1000 Volt. Individually Tested. Blade CVM steel, hardened. Insulation molded directly onto blade. Deep drawn 1" socket. Wiha-SoftFinish® handle, multi-component.

Item No.					
	mm	mm	mm	Inch	lbs.
32206	4.0	125	236	9.3	.15
32209	5.0	125	236	9.3	.16
32212	5.5	125	236	9.3	.16
32215	6.0	125	236	9.3	.16
32218	7.0	125	243	9.6	.25
32221	8.0	125	243	9.6	.25
32224	9.0	125	243	9.6	.25
32227	10.0	125	243	9.6	.27
32230	11.0	125	243	9.6	.37
32233	12.0	125	243	9.6	.38
32236	13.0	125	243	9.6	.39
32238	14.0	125	243	9.6	.39
32239	15.0	125	243	9.6	.40
32240	16.0	125	243	9.6	.42
32241	17.0	125	243	9.6	.44

322 SAE Nut Drivers, With Wiha-SoftFinish® Handle

Item No.					
	Inch	Inch	mm	Inch	lbs.
32255	5/32	5.0	236	9.3	.15
32258	3/16	5.0	236	9.3	.15
32261	7/32	5.0	236	9.3	.16
32264	1/4	5.0	243	9.6	.24
32267	5/16	5.0	243	9.6	.25
32268	11/32	5.0	242	9.6	.26
32270	3/8	5.0	243	9.6	.26
32273	7/16	5.0	243	9.6	.36
32276	1/2	5.0	243	9.6	.39
32278	9/16	5.0	243	9.6	.39
32280	5/8	5.0	243	9.6	.41



Δ 1000Volt

Item No.	SAE: 5/32, 3/16, 7/32, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8"	
32296		3.00

In roll-up pouch



Δ 1000Volt

Item No.	SAE: 3/16, 1/4, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8"	
32288		3.16



Δ 1000Volt

Item No.	METRIC: 6.0, 7.0, 8.0, 9.0, 10.0mm	
32291		1.36



Δ 1000Volt

Item No.	METRIC: 5.0, 5.5, 6.0, 7.0, 8.0, 10.0, 13.0mm	
32293		2.05



Δ 1000Volt

Item No.	SAE: 7/32, 1/4, 5/16, 3/8, 1/2"	
32292		1.52



Δ 1000Volt

Item No.	SAE: 3/16, 7/32, 1/4, 5/16, 3/8, 7/16, 1/2"	
32294		2.24



Wiha Insulated SlimLine Screwdrivers

Insulation Test Standards:

Insulation according to EN/IEC, ASTM, VDE, DIN 7437, NFPA & CSA specification



Integrated Slim Insulation molded directly onto blade

Ideal for jobs where access is limited



Wiha SlimTECHNOLOGY

Achieves blade diameters up to 33% narrower utilizing integrated insulation

←1.4"→

1000Volt

320 Insulated Slotted SlimLine Screwdrivers Insulation According to ASTM F-1505, New VDE Specification and EN/IEC, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. In Clamshell

Item No.	Size	mm	Inch	mm	mm	lbs.
32046	3.5	9/64	3.5	100	204	.07
32049	4.0	5/32	4.0	100	211	.12
32052	4.5	3/16	4.5	125	211	.14
32055	5.5	7/32	5.5	125	243	.21
32058	6.5	1/4	6.5	150	268	.25

←1.4"→

1000Volt

325 Insulated Security **TORX** SlimLine Drivers Insulation According to ASTM, New VDE Specification and EN/IEC, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. In Clamshell

Item No.	Size	mm	mm	lbs.
32512	T10s	100	204	.08
32513	T15s	100	211	.12
32514	T20s	100	211	.12
32515	T25s	125	243	.18
32517	T27s	125	243	.21
32518	T30s	125	243	.21
32519	T40s	150	268	.26

1000Volt Rated

10,000 Volt Tested

←1.4"→

1000Volt

321 Insulated Phillips SlimLine Screwdrivers Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. In Clamshell

Item No.	Size	mm	mm	mm	lbs.
32145	1	4.5	80	204	.12
32146	2	6.0	100	211	.21

←1.4"→

1000Volt

307 Insulated Xeno SlimLine Drivers For Terminal Screws Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. In Clamshell

Item No.	Size	mm	mm	mm	lbs.
30746	1	4.5	80	191	.12
30747	2	6.0	100	218	.21

←1.4"→

1000Volt

358 Insulated Square SlimLine Drivers Insulation According to ASTM, New VDE Specification and EN/IEC, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. In Clamshell

Item No.	Size	mm	mm	mm	lbs.
35844	1	4.0	100	218	.12
35845	2	4.5	125	243	.19

1000Volt




32198 11 Piece Insulated SlimLine

Slotted, Phillips, Xeno & Square

Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts.

Item No.	Slotted: 3.5, 4.0, 4.5, 5.5, 6.5mm
32198	Phillips: #1, 2
	Square: #1, 2
	Xeno: #1, 2

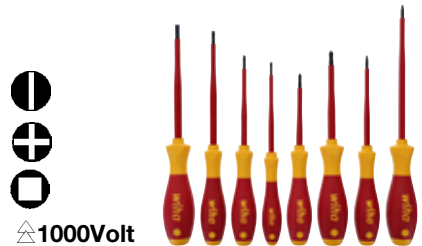


1000Volt

32197 8 Piece Insulated SlimLine

Slotted, Phillips & Square Screwdrivers.

Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts.

Item No.	Slotted: 3.5, 4.0, 4.5, 5.5mm
32197	Phillips: #1, 2
	Square: #1, 2
	lbs. 1.18

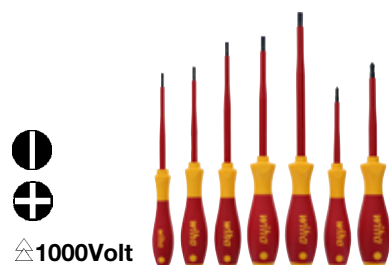

1000Volt

32195 7 Piece Insulated SlimLine

Slotted & Phillips Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts.

Item No.	Slotted: 3.5, 4.0, 4.5, 5.5, 6.5mm
32195	Phillips: #1, 2
	lbs. 1.41




Wiha Insulated SlimLine Screwdriver Sets



1000Volt

32196 6 Piece Insulated SlimLine Slotted, Phillips & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts.

Item No.	Slotted: 4.5, 6.5mm	lbs.
32196	Phillips: #1, #2	1.15
	Square: #1, #2	



1000Volt

32194 5 Piece Insulated SlimLine Slotted & Phillips Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts.

Item No.	Slotted: 3.5, 4.5, 6.5mm
32194	Phillips: #1, 2
	lbs. .98



1000Volt

32596 6 Pc. Insulated SlimLine Security **TORX** Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts.

Item No.	Security TORX : T10s, T15s, T20s, T25s, T27s, T30s	lbs.
32596		1.18

1000Volt

Slotted/Phillips

30770 2 Pc. Insulated SlimLine Terminal Block Xeno Slotted/Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No.	Xeno: #1x80mm
30770	Xeno: #2x100mm
	lbs. .34

PRO-PICK



1000Volt

32189 2 Pc. Insulated SlimLine Slotted & Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools.

Item No.	Slotted: 4.5x125mm
32189	Phillips: #2x100mm
	lbs. .37

1000Volt



32079 30 Pc. Insulated SlimLine Slotted & Phillips Screwdriver Display. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. SlimLine blades have up to 33% narrower insulation diameter then standard insulated tools. High quality CV steel, through hardened.

Item No.	6 of each:
No.	Slotted: 3.5, 4.5, 5.5mm
32079	Phillips: #1, #2

Insulated PicoFinish® Precision Screwdrivers



1000Volt

320 Insulated Slotted PicoFinish® Screwdrivers. Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested.

Item No.	mm	Inch	mm	mm	lbs.
32000	1.5	.06	40	154	.05
32001	2.0	.08	40	154	.07
32002	2.5	.10	60	160	.07
32003	3.0	.12	60	160	.08
32004	3.5	.14	60	160	.08




1000Volt

321 Insulated Phillips PicoFinish® Screwdrivers. Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested.

Item No.	Size	mm	mm	lbs.
32106	00	40	154	.05
32107	0	60	160	.07
32108	1	60	160	.08

PRO-PICK

1000Volt

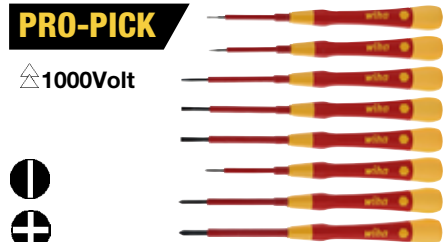

32088 8 Piece Slotted & Phillips PicoFinish® Set High quality CV steel, through hardened, black finish

Item No.	Slotted: 1.5, 2.0, 2.5, 3.0, 3.5	lbs.
32088	Phillips: #00, #0, #1	.35

Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested



32085 5 Piece Slotted & Phillips PicoFinish® Set High quality CV steel, through hardened, black finish

Item No.	Slotted: 1.5, 2.5, 3.5	lbs.
32085	Phillips: #0, #1	.26

Wiha Insulated SlimLine Blades

Insulation Test Standards:

Insulation according to EN/IEC 60900,
ASTM F-1505, VDE 0682/part 201,
DIN 7437, NFPA70E &
CSA specification


Integrated Slim
Insulation molded
directly onto blade

Insulation does
not exceed screw
head diameter

1000 Volt Rated
10,000 Volt Tested

High quality CV steel,
through-hardened

**Wiha
SlimTECHNOLOGY**
Achieves blade
diameters up to 33%
narrower utilizing
integrated insulation

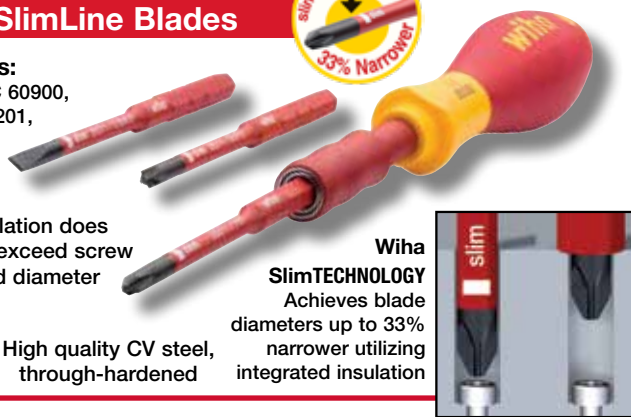

283 Insulated TORX® SlimLine Blades
Up to 33% narrower insulation diameter than
standard insulated tools.

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28325	T6	4.0	.6	5.31	.02
28326	T7	4.0	.9	7.9	.02
28339	T8	4.0	1.3	11.5	.02
28344	T9	4.0	1.3	11.5	.02
28340	T10	4.0	3.8	33.6	.02
28341	T15	6.0	5.5	48.7	.02
28342	T20	6.0	5.5	48.7	.02
28343	T25	6.0	5.5	48.7	.02



283 Insulated Slotted SlimLine Blades

SlimLine blades have up to 33% narrower
insulation diameter than standard insulated tools.

Item No.	mm	Inch	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28307	2.5	3/32	4.0	0.4	3.5	.02
28308	3.0	1/8	4.0	0.6	5.3	.02
28310	3.5	9/64	4.0	2.5	22.1	.02
28309	4.0	5/32	4.0	2.5	22.1	.02
28312	5.5	7/32	6.0	3.8	33.6	.02
28315	6.5	1/4	6.0	5.5	48.6	.02



283 Insulated Pozidriv® SlimLine Blades

SlimLine blades have up to 33% narrower
insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28330	1	4.0	3.8	33.7	.02
28331	2	6.0	5.5	48.8	.02



283 Insulated Phillips SlimLine Blades

SlimLine blades have up to 33% narrower
insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28317	1	4.0	3.8	33.7	.02
28319	2	6.0	5.5	48.8	.02



283 Insulated Xeno Slotted/Pozidriv®

SlimLine Blades Up to 33% narrower
insulation diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28320	1	4.0	3.8	33.6	.02
28321	2	6.0	5.5	48.7	.02



283 Insulated Xeno Slotted/Phillips

SlimLine Blades Up to 33% narrower insulation
diameter than standard insulated tools.

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28327	1	4.0	3.8	33.6	.02
28329	2	6.0	5.5	48.7	.02



283 Insulated Square SlimLine Blades

Up to 33% narrower insulation diameter than
standard insulated tools.

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28346	1	4.0	3.8	33.6	.02
28347	2	6.0	5.5	48.7	.02



**283 Insulated Hex METRIC SlimLine
Blades Up to 33% narrower insulation
diameter than standard insulated tools.**

Item No.	Size	Slim Dia.	Max Nm	Inch/ lbs.	lbs.
28332	1.5	4.0	0.9	7.9	.02
28333	2.0	4.0	1.8	15.9	.02
28334	2.5	4.0	3.8	33.6	.02
28335	3.0	4.0	5.5	48.7	.02
28336	4.0	6.0	5.5	48.7	.02
28337	5.0	6.0	5.5	48.7	.02
28338	6.0	6.0	5.5	48.7	.02



28348 12 Piece Insulated SlimLine

Blade Set With Belt Holder Up to 33%
narrower insulation diameter than standard
insulated tools. SlimLine blade holder holds
12 SlimLine blades.

Item No.	Slotted: 4.0, 5.5mm
28348	Phillips: #1, #2
	Hex: 2.5, 3.0, 4.0mm
lbs.	TORX®: T15, T20, T25
.42	Square: #1, #2



28372 7 Piece SlimLine Blade Set

High quality CV steel, through hardened,
black finish.

Item No.	Slotted: 2.5, 3.5, 5.5mm	lbs.
28372	Phillips: #1, #2	.14
	Square: #1, #2	.14



28373 7 Piece SlimLine Blade Set

High quality CV steel, through hardened,
black finish.

Item No.	Slotted: 2.5, 3.5, 5.5mm	lbs.
28373	Phillips: #1, #2	.14
	Xeno Slit/Ph: #1, #2	.14

Wiha PicoFinish® SlimLine Blade Holder



△1000Volt

28303 Insulated SlimLine PicoFinish® SlimLine Blade Holder. Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested. Holds SlimLine Blades

Item No.	OAL	OAL	
	Inch	mm	Inch lbs.
28303	1/4	103	4.0 .08

Wiha SlimLine Sets



△1000Volt

28328 4-piece SlimLine Blade Set With SoftFinish® Handle. Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested. Blades High quality CV steel, through hardened, black finish.

Item No.	Slotted: 3.5mm	
	Phillips: #2	lbs.
28328	Square: #2	.14

Wiha Cushion Grip SlimLine Blade Holder



△1000Volt

28301 SlimLine Blade Holder, With Wiha-SoftFinish® Handle Insulation According to VDE, ASTM F-1505 and EN/IEC 60900, NFPA70E & CSA, △ up to 1000 Volt. CV steel, through-hardened. Insulation molded directly onto blade. Blade holder, holds blades securely. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Size	mm	Inch	mm	Inch	lbs.
28301	1/4"	50	2.0	160	6.3	.15



△1000Volt

28304 SlimLine Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E & CSA, △ up to 1000 Volt. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Size	mm	Inch	lbs.
28304	1/4"	114	4.5	.21



△1000Volt

28302 SlimLine Stubby Blade Holder, With Wiha-SoftFinish® Handle. Insulation According to VDE, ASTM, EN/IEC, NFPA70E & CSA, △ up to 1000 Volt. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item No.	Size	mm	Inch	lbs.
28302	1/4"	57	2.2	.11

Wiha Insulated Pop-Up SlimLine Sets



Blades High quality CV steel, through-hardened

Locking blade holder securely holds blades in place for precise fastening

△1000Volt Rated
10,000 Volt Tested

Certified to VDE, EN ISO, BS EN, ASME specifications



Each SlimLine bit can be taken in and out of the holder easily and conveniently



28393 Insulated Pop-Up "Apprentice" Blade Holder Set With SlimLine Blades

Insulated cushion grip multi-component handle. Locking bit holder holds SlimLine Blades securely. Convenient rotating cap.

28393 Set includes the following blades:

↓ Slotted: 3.0, 4.0, 5.5, 6.5mm

⊕ Phillips: #1, #2

↪ lbs. .38



28394 Insulated Pop-Up "Residential" Blade Holder Set With SlimLine Blades

28394 Set includes the following blades:

↓ Slotted: 3.0, 4.0mm

⊕ Phillips: #1, #2

⊖ Square: #1, #2

↪ lbs. .38



28395 Insulated Pop-Up "MRO" Blade Holder Set With SlimLine Blades

28395 Set includes the following blades:

↓ Slotted: 3.0, 4.0mm

⊕ Phillips: #1, #2

⊕ Terminal Xeno: #1, #2

↪ lbs. .38

Wiha SlimLine Adapters



△1000Volt

28316 Insulated SlimLine Blade Extension For SlimLine Blade Holders

Item No.	OAL	OAL	
	Inch	mm	Inch lbs.
28316	1/4	70	2.8 .06



△1000Volt

28311 Insulated SlimLine 1/4" Socket Adapter For SlimLine Blade Holders

Item No.	OAL	OAL	
	Inch	mm	Inch lbs.
28311	1/4	60	2.4 .08



Wiha Insulated SlimLine Blade Sets



1000Volt

28391 8 Piece Insulated SlimLine Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely. Up to 33% narrower insulation diameter than standard insulated tools. In roll up pouch

Item No.	Slotted: 4.0, 6.5
28391	Phillips: #1, #2
	Xeno SL/PH: #2
lbs. .45	TORX®: T15, T20
	28301 - SlimLine Blade Holder



1000Volt

28392 12 Piece Insulated SlimLine Blade Set In roll up pouch

Item No.	Slotted: 3.0, 5.5mm
28392	Phillips: #2
	Xeno SL/PH: #1, #2
lbs. .52	Square: #1, #2
	TORX®: T8, T10, T15, T20
	28301 - SlimLine Blade Holder



1000Volt

28390 15 Piece Insulated SlimLine Blade Set In roll up pouch

Item No.	Slotted: 3.0, 4.0, 5.5, 6.5
28390	Phillips: #1, #2
	Xeno SL/PH: #1, #2
lbs. .56	TORX®: T8, T10, T15, T20
	Square: #1, #2
	28301 - SlimLine Blade Holder



1000Volt

28398 19 Piece Insulated SlimLine Blade Set High quality CV steel, through hardened. Cushion grip. Friction hold blade holder, holds blades securely.

Item No.	Slotted: 3.0, 4.0, 5.5mm
28398	Phillips: #1, #2
	Xeno SL/PH: #1, #2
lbs. .64	Xeno SL/PZ: #1, 2
	TORX®: T8, T10, T15, T20
	Square: #1, 2
	Hex METRIC: 3.0, 4.0, 5.0mm
	28301 - SlimLine Blade Holder

1000Volt



28396 20 Piece Insulated SlimLine Blade Set High quality CV steel, through hardened. Friction hold, stubby cushion grip handle. In zipper case.

Item No.	Slotted: 3.0, 3.5, 4.0, 5.5mm
28396	Phillips: #1, #2
	Xeno SL/PH: #1, #2
lbs. .85	Xeno SL/PZ: #1, #2
	TORX®: T8, T10, T15, T20
	Square: #1, #2
	Hex METRIC: 3.0, 4.0, 5.0mm
	SlimLine Stubby Blade Holder



1000Volt

28399 30 Piece Insulated SlimLine Blade Set In folding wallet

Item No.	Slotted: 2.5, 3.0, 3.5, 4.0, 5.5, 6.5mm
28399	Phillips: #1, #2
	Pozidriv®: #1, #2
lbs. 1.20	Xeno SL/PH: #1, #2
	Xeno SL/PZ: #1, #2
	TORX®: T8, T9, T10, T15, T20, T25
	Square: #1, #2
	Hex METRIC: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	28301 - SlimLine Blade Holder

E-SCREWDRIVER speedE®-II ELECTRIC

PRO-PICK

speedE that works for you

Packaging
H 2-5/8"
W 10-1/4"
L 6-1/8"



32490 13 Pc. speedE-II Electric Screwdriver With SlimLine Blades

Certified to EN ISO, BS EN, ASME. Set includes speedE electric 0.4 - 1.0 Nm handle, 8 Insulated SlimLine blades, 2 Li-Ion rechargeable batteries & wall plug adapter/charger.

Item No.	speedE Screwdriver: Handle
32490	Range 0.4 Nm - 1.0Nm
	Insulated SlimLine Blades
	SlimLine Slotted: 3.5, 5.5mm
	SlimLine Phillips: #1, #2
lbs. 2.14	SlimLine Square: #1, #2
	SlimLine Terminal Xeno SI/Ph: #1, #2

*speedE electric screwdriver is only insulated when used with Wiha SlimLine blades

Wiha Insulated TorqueControl Tools

PRO-PICK



28789 11 Pc. Insulated TorqueControl Set With SlimLine Blades

Certified to EN ISO, BS EN, ASME. Set includes Insulated multi-component adjustable TorqueVario-S 10-50 In/lbs. handle, 8 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item Slotted: 4.0, 6.5mm

No. Phillips: #1, 2

28789 Square: #1, 2

Terminal Xeno SI/Pz: #1, 2

lbs. Torque Handle Range 10-50 In/lbs.

1.32 SlimLine Blade Holder 6.75" OAL

With Certificate
of Calibration



28781 20 Piece Insulated

TorqueControl Set With SlimLine Blades

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, SoftFinish® SlimLine blade handle, PicoFinish® SlimLine blade handle, 15 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item Slotted: 2.5, 3.5, 4.0, 6.5mm

No. Phillips: #1, 2 (qty. 2 of #2)

28781 Terminal Xeno SI/Ph: #1, 2

TORX®: T10, T15, T20, T25

lbs. Square: #1, 2

1.61 Handle Range 10-50 In/lbs.

SlimLine SoftFinish® Blade Handle

PicoFinish® SlimLine Handle

SlimLine Blade Holder 6.75" OAL

Includes Certificate



1000Volt

*Requires SlimLine blade holder #28350

287 Insulated TorqueVario-S, With Window Scale Insulation up to 1000Volt. EN/IEC 60900 EN ISO 6789, BS EN 26789, ASME B107.14M & CSA, +/- 6% Accuracy. Ergonomic multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained.

Item No.	Range	Inch lbs.	Increments	mm	lbs.
28724	5 - 18	.5 In/lbs	126-131	.43	
28726	10 - 50	2 In/lbs	133-138	.40	
28727	18 - 62	2 In/lbs	137-142	.69	

287 Insulated TorqueVario-S Handle - In Newton Meter Scale

Item No.	Range	Nm	mm	lbs.
28734	0.5 - 2.0	131	.45	
28736	0.8 - 5.0	138	.45	
28738	2.0 - 7.0	142	.72	

Each TorqueVario handle has unique serial number & certificate of calibration



1000Volt

28350 Insulated SlimLine Torque Blade Holder Chrome-vanadium-molybdenum steel. Through hardened black finish. ClicFix quick release holder securely locks bits.

Item No.	OAL	OAL	Inch	lbs.
	mm	mm		
28350	6.0	170	6.75	.06



1000Volt

28700 Insulated SlimLine Socket Adapter Chrome-vanadium-molybdenum steel.

Item No.	OAL	OAL	Inch	lbs.
	mm	mm		
28700	6.0	180	7.1	.08



* Includes Certificate

* Includes SlimLine blade holder #28350

* Requires SlimLine Blades

1000Volt



287 Insulated TorqueVario-S, With Window Scale Insulation up to 1000Volt EN/IEC, EN ISO, BS EN, ASME & CSA, +/- 6% Accuracy. Multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. In Plastic Tube Holder

Item No.	Range	Inch lbs.	Increments	mm	lbs.
28750	5 - 18	.5 In/lbs	126-131	.56	
28751	10 - 50	2 In/lbs	133-138	.74	
28752	18 - 62	2 In/lbs	137-142	.84	

287 Insulated TorqueVario-S Handle - In Newton Meter Scale

Item No.	Range	Nm	mm	lbs.
28740	0.5 - 2.0	131	.64	
28741	0.8 - 5.0	138	.56	
28742	2.0 - 7.0	142	.84	

Each TorqueVario handle has unique serial number & certificate of calibration

Wiha Insulated TorqueControl & SlimLine Tool Sets



In Roll-up Pouch

With Certificate of Calibration

⚡ 1000Volt

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M Specifications



28791 8 Piece Insulated TorqueControl

Set With Slotted & Phillips SlimLine Blades

Set includes Insulated multi-component adjustable TorqueVario-S handle, 5 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No. Slotted: 3.0, 4.0, 5.5mm

28791 Phillips: #1, 2

28726-Handle Range 10-50 Inch/lbs.

⚡ lbs. .87

In Roll-up Pouch



⚡ 1000Volt

28792 16 Piece Insulated TorqueControl

Set With SlimLine Blades Certified to EN

ISO 6789, BS EN 26789, ASME B107.14M.

Set includes Insulated multi-component adjustable TorqueVario-S handle, 13 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.

28792 SlimLine Slotted: 4.0, 5.5, 6.5mm

SlimLine Phillips: #1, 2

SlimLine Terminal Xeno: #1, 2

SlimLine TORX®: T8, T10, T15, T20

SlimLine Square: #1, 2

28727 - Handle Range 18-62 Inch/lbs.

SlimLine Blade Holder

⚡ lbs. 1.27

With Certificate of Calibration



⚡ 1000Volt

28795 12 Pc. Insulated TorqueControl

Set With SlimLine Blades Certified to EN

ISO, BS EN, ASME. Set includes Insulated

multi-component adjustable TorqueVario-S Nm handle, SlimLine Blade Holder Handle, 8 SlimLine blades, SlimLine blade holder & Torque adjustment tool.

Item No.

28795 SlimLine Slotted: 4.0, 5.5, 6.5mm

SlimLine Phillips: #1, 2

SlimLine Pozidriv®: #1, 2

SlimLine Terminal Xeno SI/Pz: #2

28736 - Handle Range 0.8 - 5.0 Nm

SlimLine Blade Holder Handle

SlimLine Blade Holder

⚡ lbs. 1.32

With Certificate of Calibration

Wiha Insulated Torque Ratchet Wrench Sets



#30138



#30114

⚡ 1000Volt

301 Insulated Torque Ratchet Wrenches,

1/4, 3/8, 1/2" Drives Insulated to EN/IEC

60900:2004, ASTM F1505, CSA Standards

Visible reading scale for easy reading and adjustment. Locking endcap Torque adjuster for easy adjustment. Accuracy +/- 10%. Dual scale reading Ft. lbs. / Nm.

Item No.	Inch	OAL mm	OAL Inch	Nm	lbs.
30114	1/4"	210	8.25	5-25	1.02
30138	3/8"	370	14.5	5-50	2.72
30152	1/2"	530	21.0	40-220	3.64



⚡ 1000Volt

30190 16 Pc. Insulated 3/8" Drive

Ratcheting Torque Wrench & Socket Set -

SAE. CV steel, forged, oil-hardened

sockets. Insulated to EN/IEC 60900.

Item No. SAE 3/8" Drive Sockets:

30190 1/4, 9/32, 5/16, 11/32, 3/8, 7/16

⚡ 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"

lbs. 3/8" x 125mm Extension Bar

8.80 3/8" x 250mm Extension Bar

3/8" Drive Ratcheting Torque

Wrench - 5-50 Nm

*Sockets must be used with insulated ratchets & extensions



⚡ 1000Volt

30192 16 Pc. Insulated 3/8" Drive

Ratcheting Torque Wrench & Socket Set -

METRIC. CV steel, forged, oil-hardened

sockets. Insulated to EN/IEC 60900.

Item No. METRIC 3/8" Dr. Sockets:

30192 8, 9, 10, 11, 12, 13, 14, 15, 16,

⚡ 17, 18, 19, 20mm

lbs. 3/8" x 125mm Extension Bar

8.80 3/8" x 250mm Extension Bar

3/8" Drive Ratcheting Torque

Wrench - 5-50 Nm

*Sockets must be used with insulated ratchets & extensions

Wiha Insulated Pop-Up Insert Bit Sets

Certified to VDE, EN ISO, BS EN, ASME specifications

Blades High quality CV steel, through-hardened

Convenient rotating cap



Friction hold bit holder securely holds bits in place



1000Volt Rated
10,000 Volt Tested




1000Volt

38050 Insulated Pop-Up Bit Holder Set With 1/4" Insert Bits

Insulated cushion grip multi-component handle. Bit holder holds 1/4" Insert bits. Convenient rotating cap.

Item No.	Set includes the following bits:
38050	- Slotted: 4.5, 5.5, 6.0mm - Phillips: #0, 1, 2, 3 - Square: #1, 2, 3 - Pozidriv®: #1, 2, 3
	lbs. .46




1000Volt

38051 Insulated Pop-Up Bit Holder Set With 1/4" Insert Bits

Insulated cushion grip multi-component handle. Bit holder holds 1/4" Insert bits. Convenient rotating cap.

Item No.	Set includes the following bits:
38051	- Slotted: 4.5, 5.5, 6.0mm - Phillips: #0, 1, 2, 3 - Square: #1, 2, 3 - TORX®: T15, T20, T25
	lbs. .46

Pen Style Control Cabinet Key

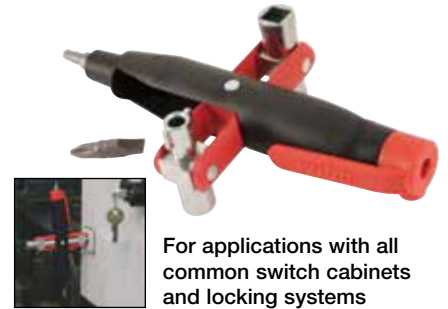

For applications with all common switch cabinets and locking systems

21105 Pen Style Control Cabinet Key

Diecast Zinc, polished finish. Includes: Square 5, 6, 7, 8mm, Triangular 9mm, Double Bit Key 5mm/Internal & 9mm/External, Universal 1/4" Bit Adapter, Magnetic Bit Holder & 2 Double Insert Bits: Slotted 7mm & Phillips #2, TORX T20/T25

Item No.	mm	Inch	lbs.
21105	140	5.5"	.30

Switch Cabinet Key



21103 Switch Cabinet Keys

For applications with all common switch cabinets and locking systems. Diecast Zinc. Bit insert Slotted 7.0mm & Phillips #2. Adapter for 1/4" bits on securing chain and 1/4" bit adapter in one arm.

Item No.	mm	Inch	lbs.
21103	76	3.0"	.22

Insulated Folding Ruler

Meets VDE, EN/IEC, ASTM, CSA, NFPA standards



With Wire Puller Slot



61630 Insulated SAE & METRIC Folding Ruler

10,000Volt Tested/1000Volt Rated. SAE & METRIC deep embossed scales. 10 folding sections. 30% fiberglass reinforced polyimide.

Item No.	Meter	Inch	Sections	Increments	lbs.
61630	2	78"	10	1/16 & 1mm	.31

Protturn Insulated Electrician's Shears



32951 Protturn Insulated Electrician's Shears. Insulation meets VDE, ASTM F1505, EN/IEC 60900, CSA, NFPA 70E, OSHA Specifications.

Made from stainless 420 grade steel

Item No.	mm	Inch	lbs.
32951	160	6.3	.22

Insulated Stripping Pliers



1000Volt

10250 Insulated Stripping Pliers.

Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification. Individually Tested. Wide long head with ridged gripping surface, shears blade and firm wire stripping stations. Wire stripping stations 0.81 / 1.0 / 1.3 / 1.6 / 2.0 / 2.59mm, AWG 20 / 18 / 16 / 14 / 12 / 10.

Item No.	mm	Inch	Ø	AWG	lbs.
10250	160	6.3"	0.81-2.59	20-10	.26

Wiha Insulated Master Electrician's Tools

Insulation Test Standards:



Insulation according to EN/IEC 60900,
ASTM F-1505, New VDE 0682/part 201,
DIN 7437, NFPA70E & CSA



All Tools In
Dedicated
Positions
For Quick
Storage
& Easy
Location
Tracking



1000Volt



Inch



Metric



1000Volt



All Tools In
Dedicated
Positions
For Quick
Storage
& Easy
Location
Tracking

32800 80 PC. Insulated Master Electrician's Tool Set In Rolling Water Tight Traveling Tool Box - 10,000Volt Tested, 1000Volt Rated

Item# 32800	Set Includes:	Weight: 33.9 lbs.
6.3" Long Nose Pliers	6.3" Diagonal Cutters	
8.0" Long Nose Pliers	8.0" High Leverage Cutters	
6.3" Bent Nose Pliers	6.3" Cable Cutters	
6.3" Long Flat Nose Pliers	6.3" Stripping Pliers	
9.0" Combo Pliers/Crimpers	8.0" Adjustable Wrench	
Insulated Inch Sockets: 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"	Insulated Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm	
Insulated Metric Sockets: 13.0, 14.0, 15.0, 17.0, 19.0, 20.0, 22.0mm	Insulated Phillips: #0, 1, 2, 3	
Insulated Ratchet 3/8" Drive	Insulated Xeno Slotted/Phillips Terminal: #1, 2	
Insulated 4.9" Extension 3/8" Dr.	Insulated Square: #1, 2	
Insulated SAE Nut Drivers: 7/32, 1/4, 5/16, 3/8, 7/16"	Insulated TORX: T6, T7, T8, T9, T10, T15, T20, T25, T30	
Insulated METRIC Nut Drivers: 5.0, 5.5, 6.0, 7.0, 8.0, 10.0, 13.0mm	Insulated L-key: 10mm	
Insulated T-handle SAE Hex: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"	Insulated L-key: 1/2"	
Insulated T-handle METRIC Hex: 4.0, 5.0, 6.0, 8.0mm	Insulated Cable Knife: 50mm	
	2 Meter Ruler In/MM	
	Cat. III Voltage Detector- Battery Operated	

32801 112 Pc. Insulated Master Electrician's Tool Set In Rolling Water Tight Traveling Tool Box - 10,000Volt Tested, 1000Volt Rated

Item# 32801	Set Includes:	Weight: 51.3 lbs.
6.3" Long Nose Pliers	6.3" Diagonal Cutters	
8.0" Long Nose Pliers	8.0" High Leverage Cutters	
6.3" Bent Nose Pliers	6.3" Cable Cutters	
6.3" Long Flat Nose Pliers	6.3" Stripping Pliers	
9.0" Combo Pliers/Crimpers	8.0" Adjustable Wrench	
Insulated SAE Sockets: 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"	Insulated Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm	
Insulated METRIC Sockets: 13.0, 14.0, 15.0, 17.0, 19.0, 20.0, 22.0mm	Insulated Phillips: #0, 1, 2, 3	
Insulated Ratchet 3/8" Drive	Insulated Xeno Slotted/Phillips Terminal: #1, 2	
Insulated 4.9" Extension 3/8" Dr.	Insulated Square: #1, 2	
Insulated SAE Nut Drivers: 7/32, 1/4, 5/16, 3/8, 7/16"	Insulated TORX: T6, T7, T8, T9, T10, T15, T20, T25, T30	
Insulated METRIC Nut Drivers: 5.0, 5.5, 6.0, 7.0, 8.0, 10.0, 13.0mm	Insulated T-handle SAE Hex: 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"	
Insulated L-key: 10mm	Insulated T-handle METRIC Hex: 4.0, 5.0, 6.0, 8.0mm	
Insulated L-key: 1/2"	Insulated Inch Deep Offset Ring Wrenches: 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/4"	
Insulated Cable Knife: 50mm	Insulated Metric Deep Offset Ring Wrenches: 8.0, 9.0, 10.0, 11.0, 12.0, 13.0, 14.0, 15.0, 17.0, 19.0, 20.0, 22.0, 24.0, 27.0, 30.0, 32.0mm	
Cat. III Voltage Detector- Battery Operated		
2 Meter Ruler In/MM		

For your safety, use tools marked:



ASTM F1505
> Meets Specifications

GOOD




IEC 60900
> Meets Specifications

BETTER



VDE 0680
> Certified & Tested

BEST

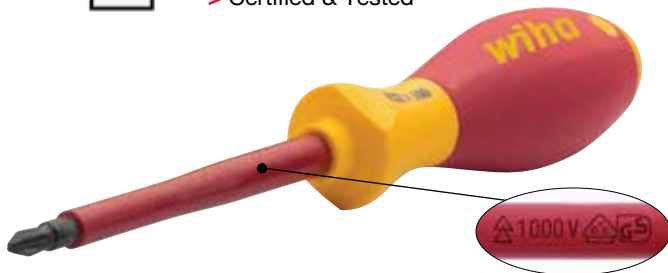

- > Individually tested to block potentially hazardous voltages from reaching you
- > Double insulation certified to protect user and equipment
- > Ergonomic cushion grip handles for less strain and maximum comfort



WARNING!

Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.

Insulated EV Essential Tool Kit



Grainger
Item No.
NEW

91890 26 Piece Insulated EV Tool Kit. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, up to 1000 volt. Soft grip handles for maximum power & comfort

Item# 91890 Set Includes:  lbs.

8.0" Insulated Industrial Lineman's Pliers

8.0" Insulated Industrial Long Nose Pliers

8.0" Insulated Industrial Heavy Duty Diagonal Cutters

Insulated SoftFinish® Screwdrivers:

Slotted: 3.5, 4.5, 6.5mm | Phillips: #1, #2 | Torx: T20, T25, T30

3/8" Drive Sockets: 5, 6, 8, 10, 12, 13mm

3/8" Drive Ratchet: 7.5"

3/8" Drive Extension Bars: 4.9", 9.8"

Open End Wrenches: 8, 10, 12, 13mm

Tweezers: 8"/200mm Serrated Straight Blunt

Cable Stripping Knife: 50mm x 216mm

Soft
Grip
Handle

Secure
Locking
Latch

Steel
Pin
Hinges



Insulated Foam Tray Sets



Medium Tray Size: 15-1/4" x 11" x 1-1/4"

Small Tray Size: 11" x 7-3/4" x 1-1/4"



32080 10-Piece Insulated SoftFinish® Cushion Grip Screwdriver Tray Set Designed with an ergonomic SoftFinish® cushion grip for maximum power and comfort.

Item Slotted: 3.5, 4.5, 4.5, 5.5, 6.5mm

No. Phillips: #1, #2, #3

32080 Square: #1, #2



32081 5-Piece Insulated SoftFinish® Cushion Grip Screwdriver Tray Set Designed with an ergonomic SoftFinish® cushion grip for maximum power and comfort.

Item No. Slotted: 4.5, 5.5, 6.5mm

32081 Phillips: #1, #2



32960 3-Piece Insulated Pliers and Cutters Tray Set Patented pliers DynamicJoint® provides 40% easier cuts and significantly longer tool life.

Item Long Nose: 8.0" | 200mm

No. Angled Cutters: 8.0" | 200mm

32960 NE Style Lineman's: 9.5" | 245mm

Wiha Veto Red Stripe Pro Pac



Comfort & stability



Large capacity and rugged durability



Tools for Pro's



Designed for pros who need to walk long distances or climb cage ladders with their tools, the Wiha RedStripe Backpack from Veto ProPac is a comfortable, durable, all-weather solution. Includes 2 main storage bays, 4 storage platforms, 56 interior & exterior pockets, and dozens of features pros love.

91596 30-Piece Veto RedStripe Pro Pac

For your hand tools, power tools and supplies.

Item 11inOne Multi-Driver

No. SoftFinish Screwdrivers

91596 Slotted 3.5, 6.5mm, Phillips #1, #2, Square #1, #2

9.0"/225mm NE Style Lineman's with Crimpers

6Pc. Color Coded Nut Setters

13Pc. MagicRing Inch Hex L-key Set

9Pc. MagicRing Metric Hex L-key Set

PRO-PICK

Insulated Pliers/Cutters Tool Set

PRO-PICK



32968 3 Piece Insulated Industrial Pliers/Cutters Set.

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Δ up to 1000 volt. Individually Tested. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. C70 special tool steel hardened and tempered to high quality. Cushion Grip Insulated handles. In Clamshell

Item# 32968 Set Includes:  lbs. 2.35

9.5" Insulated Industrial NE Style Lineman's Pliers

8.0" Insulated Industrial Long Nose Pliers

8.0" Insulated Industrial Heavy Duty Diagonal Cutters

Master Technician's Tool Set

PRO-PICK



32937 59 Piece Insulated Master Electrician's Tool Set.

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Δ up to 1000 volt. Individually Tested.

Item# 32937 Set Includes:  lbs. 18.45

9.5" Insulated Industrial NE Style Lineman's Pliers

8.0" Insulated Industrial Long Nose Pliers

8.0" Insulated Industrial Heavy Duty Diagonal Cutters

8.0" Insulated Industrial Cable Cutters

10.0" Insulated Water Pump Pliers

Insulated SoftFinish® Screwdrivers:

Slotted: 4.0, 4.5, 5.5, 6.5mm | Phillips: #1, #2

Square: #1, #2 | Terminal Xeno Slit/Ph: #1, #2

Nut Drivers Inch: 7/32, 1/4, 5/16, 3/8, 7/16, 1/2"

Insulated PicoFinish® Precision Screwdrivers:

Slotted: 2.5, 3.0, 3.5mm | Phillips: #00, #0, #1

22 Pc. ErgoStar Ball End Hex SAE & METRIC L-keys

SAE: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8"

METRIC: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0, 10.0mm

Extra Heavy Duty SoftFinish® Screwdriver: Slotted 8.0mm

Nut Setters SAE: 1/4, 5/16, 3/8"

10.0" Auto Water Pump Pliers

7.25" Wire Stripping Pliers 10-20 AWG

25 Ft. Tape Measure, 20 oz. Claw Hammer, 9" Torpedo Level

5.75" Cat. IV Voltage Detector 50-1000 Volts

Journeyman's Tool Set



32935 30 Piece Insulated Journeyman's Tool Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Δ up to 1000 volt. Individually Tested.

Item# 32935 Set Includes:  lbs. 14.88

9.5" Insulated Industrial NE Style Lineman's Pliers

8.0" Insulated Industrial Long Nose Pliers

8.0" Insulated Industrial Heavy Duty Diagonal Cutters

8.0" Insulated Industrial Cable Cutters

10.0" Insulated Water Pump Pliers

Insulated SoftFinish® Screwdrivers:

Slotted: 4.0, 4.5, 6.5mm | Phillips: #1, #2 | Square: #1, #2

Nut Drivers SAE: 1/4, 5/16, 3/8"

Insulated PicoFinish® Precision Screwdrivers:

Slotted: 2.5, 3.0, 3.5mm | Phillips: #0, #1

Extra Heavy Duty SoftFinish® Screwdriver: Slotted 8.0mm

Nut Setters SAE: 1/4, 5/16, 3/8"

10.0" Auto Water Pump Pliers

7.25" Wire Stripping Pliers 10-20 AWG

25 Ft. Tape Measure, 20 oz. Claw Hammer, 9" Torpedo Level

5.75" Cat. IV Voltage Detector 50-1000 Volts

Apprentice Tool Set

PRO-PICK



32934 16 Piece Insulated Apprentice Tool Set. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Δ up to 1000 volt. Individually Tested.

Item# 32934 Set Includes:  lbs. 8.42

9.5" Insulated Industrial NE Style Lineman's Pliers

8.0" Insulated Industrial Long Nose Pliers

8.0" Insulated Industrial Heavy Duty Diagonal Cutters

Insulated SoftFinish® Screwdrivers:

Slotted: 4.5, 6.5mm | Phillips: #1, #2 | Square: #2

Insulated PicoFinish® Precision Screwdrivers:

Slotted: 2.5, 3.0, 3.5mm | Phillips: #0

7.25" Wire Stripping Pliers 10-20 AWG

25 Ft. Tape Measure, 20 oz. Claw Hammer, 9" Torpedo Level

Wiha Insulated Industrial Tool Sets



⚡ 1000Volt

32981 3 Pc. Insulated Industrial Pliers & Cutters ⚖ lbs. 2.18

Item No. Insulated Pliers & Cutters

32981 8.0" Combo Pliers, 8.0" Long Pliers, 8.0" Diagonal Cutters

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards



⚡ 1000Volt

32086 7 Pc. Insulated Industrial Combo Pliers & Screwdrivers ⚖ lbs. 1.83

Item No. Insulated Combination Pliers:

32086 8" Long Nose Pliers

Drivers: Slotted: 3.0, 4.0mm

Phillips: #0, 1, 2

Square: #2



⚡ 1000Volt

32984 6 Pc. Insulated Industrial Combo Pliers & Screwdrivers ⚖ lbs. 2.06

Item No. Insulated Combination Pliers:

32984 8.0" Combination Pliers

8" Long Nose Pliers

Drivers: Slotted: 3.0, 4.5mm

Phillips: #2 • Square: #2



⚡ 1000Volt

32983 5 Pc. Insulated Industrial Diagonal Cutters & Screwdrivers ⚖ lbs. 1.17

Item No. Insulated Diagonal Cutters:

32983 6.3"/160mm Diagonal Cutter

Insulated Drivers: Phillips: #1, #2

Slotted: 3.0, 4.5mm



In canvas tool bag



⚡ 1000Volt

32977 11 Pc. Pliers & Driver Set.

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, ⚡ up to 1000 volt. Individually Tested.

Item# 32977 ⚖ lbs. 6.30

8.0" Combination Pliers

6.3" & 8.0" Long Nose Pliers W/Cutter

6.3" Diagonal Cutter

8.0" High Leverage Cutter

Phillips: #0, 1, 2 & Slotted: 3.0, 4.0, 6.5mm



In canvas tool bag



⚡ 1000Volt

32973 22 Pc. Pliers & Driver Set.

Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, ⚡ up to 1000 volt. Individually Tested. In molded tool box

Item# 32973 Set Includes: ⚖ lbs. 8.70

9.0" Linemans Pliers W/Cutters

8.0" Long Nose Pliers W/Cutter

8.0" Diagonal Cutters

50mm Cable Stripping Knife

Insulated Slim Slotted: 3.5, 4.5mm

Insulated Slim Phillips: #1, 2

Insulated Slim Xeno: #1, 2

Insulated Slim Square: #1, 2


Insulated T-handle Hex Inch:

5/32, 3/16, 7/32, 1/4, 5/16, 3/8"

Insulated Inch Nut Drivers: 3/8, 7/16, 1/4, 5/16"

Insulated BiCut SuperCut & Screwdriver Set

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards

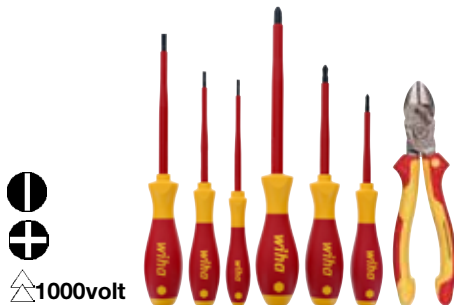

⚡ 1000volt

32942 7 Pc. Insulated Industrial BiCut SuperCut & Screwdrivers ⚖ lbs. 1.86

Item No. Insulated BiCut SuperCut:

32942 8.0"/200mm BiCut SuperCut

Ins. Drivers: Phillips: #0, #1, #2

Slotted: 3.0, 4.5, 5.5mm

Wiha Insulated Industrial Tool Sets




In Roll
Out
Pouch



In Roll
Out
Pouch



Tool box set
in blow molded trays

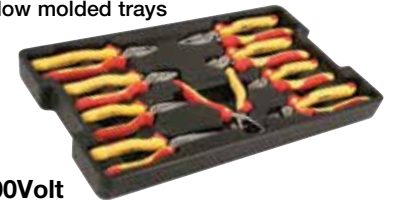

1000Volt

32989 28 Piece Insulated Industrial Pliers & Cutters Set Insulated pliers & cutters set in a light weight tool box tray.

Item No.	Set Includes:
32989	9.0" Lineman's Pliers
	8.0" High Leverage Combo Pliers
	6.3" & 8.0" Long Nose Pliers
lbs.	8.0" Cable Cutters
6.34	6.3" & 8.0" Diagonal Cutters
	6.3" Stripping Pliers
	7.0" Crimping Pliers
	Slotted: 2.5, 3.0, 3.5, 4.0, 4.5, 5.5, 6.0, 6.5, 8.0, 10.0mm
	Phillips: #0, #1, #2, #3
	Xeno Slotted/Phillips: #1, #2
	Square: #1, #2
	Cat. IV Voltage Detector -
	50-1000 Volt, Battery Operated

32988	22 Pc. Pliers/Cutters & SlimLine Blade Set. Individually Tested.
Item# 32988	Set Includes:
32923 - 8.0" Long Nose Pliers	lbs.
32933 - 6.3" Diagonal Cutters	5.74
32917 - 9.0" Lineman's w/Cutters	
32929 - 8.0" H.D. Diagonal Cutters	
32927 - 8.0" Cable Cutters	
32947 - 6.3" Stripping Pliers	
32945 - 7.0" Crimpers	
15 Pc. SlimLine Blade Set includes:	
Insulated SlimLine Blade Holder	
Slotted: 3.0, 4.0, 5.5, 6.5	Phillips: #1, #2
Xeno: #1, #2	Square: #1, #2
TORX® : T8, T10, T15, T20	

In Belt
Pack
Pouch

1000volt



32985	7 Pc. Insulated Industrial Pliers/Cutters & Screwdrivers
Item No.	Insulated Pliers/Cutters:
32985	8.0" Combo Pliers, 6.3" Long Nose, 6.3" Diagonal Cutters
lbs.	Insulated Divers: Phillips: #1, #2
2.30	Slotted: 3.0, 4.5mm



32986 11 Pc. Pliers/Cutters & Screwdriver Set. Insulation According to VDE 0682/part 201, DIN EN 60900, EN/IEC 60900, ASTM F-1505-10, NFPA70E, up to 1000 volt. Individually Tested.

Item# 32986	Set Includes:	
32926 - 6.3" Long Nose Pliers	lbs.	
32933 - 6.3" Diagonal Cutters	3.62	
32930 - 8.0" Combination Pliers		
32947 - 6.3" Stripping Pliers		
Insulated Slotted: 3.0, 4.5, 5.5mm		
Insulated Phillips: #1, #2		
Insulated Square: #1, #2		

1000Volt



In Belt
Pack
Pouch

32990	17 Pc. Insulated Pop-Up Bit Holder & Pliers/Cutters Set
	Bit holder handle, cushion grip with magnetic holder to securely hold bits.
Item No.	Set Includes 1/4" Insert Bits:
32990	Slotted: 4.5, 5.5, 6.0mm
	Phillips: #0, 1, 2, 3
	Square: #1, 2, 3
	TORX® : T15, T20, T25
	8.0"/200mm Long Nose Pliers
lbs.	8.0"/200mm High Lev. Cutters
3.72	9.5"/245mm Lineman's Pliers



1000Volt

32999	9 Pc. Insulated Industrial Pliers & Cutters Set Insulated pliers & cutters set in a light weight tool box tray.
Item No.	9.0" Lineman's Pliers
32999	8.0" High Leverage Combo Pliers
	6.3" & 8.0" Long Nose Pliers
lbs.	8.0" Cable Cutters
6.34	6.3" & 8.0" Diagonal Cutters
	6.3" Stripping Pliers
	7.0" Crimping Pliers

Insulated Industrial Pliers and Cutters



Two component ergo cushion grip handles



Induction hardened jaws and cutters to 64HRC



Industrial brushed finish

Tools meet ASTM, IEC, VDE, EN, NFPA & CSA standards



Insulated NE Style Lineman's Pliers



Knurled Striking Zone



Long life high performance dynamic 60/40 joint

32938 Insulated NE Style Lineman's Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, Δ up to 1000Volt. Individually Tested. Long life edge is achieved through additional induction hardening to approx. 64HRC. Special C70 tool steel hardened & tempered. Extra long cutting edge for flat and round cables.

Item No.	mm	Inch	wt.
32938	245	9.5	1.18

Insulated Industrial Lineman's Pliers W/Crimpers



Knurled Striking Zone

PRO-PICK



Δ 1000volt

32948 Insulated Industrial Lineman's Pliers With Crimpers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, Δ up to 1000Volt. Individually Tested. Long life edge is achieved through additional induction hardening to approx. 64HRC. Special C70 tool steel hardened & tempered. Extra long cutting edge for flat and round cables.

Item No.	mm	Inch	wt.
32948	245	9.5	1.22

Insulated High Leverage Diagonal Cutters

PRO-PICK

Δ 1000volt

32939 Insulated Industrial High Leverage Diagonal Cutters. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated. Individually Tested. DIN ISO 5749 Semi-circular. Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. C70 special tool steel hardened and tempered to high quality. For soft, hard & piano wire, lay-on joint, optimized power transmission.

Item No.	mm	Inch	Copper AWG	wt.
32939	200	8.0	#4	.66

Insulated Diagonal Cutters

Long life high performance dynamic 60/40 joint



Δ 1000volt

329 Insulated Industrial Diagonal Cutters. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated. Individually Tested. DIN ISO 5749 Low wear lap joint, riveted to able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 64HRC. Special tool steel hardened & tempered. For soft, medium hard wire & piano wire.

Item No.	mm	Inch	Copper AWG	wt.
32933	160	6.3	#6	.64
32929	200	8.0	#6	.80

Insulated Combo Pliers With Dynamic Joint

Δ 1000volt



Long life high performance dynamic 60/40 joint

32930 Insulated Industrial High Leverage Combination Pliers. Insulation According to EN/IEC 60900, ASTM F-1505, NFPA70E & CSA, Δ up to 1000 Volt. Individually Tested. DIN ISO 5746 Extra long cutting edge for flat & round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 64HRC. Use for gripping, pulling & holding as well as cutting wires and cables ranging in hardness from soft to extremely hard.

Item No.	mm	Inch	Copper AWG	wt.
32930	200	8.0	#4	.90
32900	225	9.0	#4	.90

Insulated Crimpers

Δ 1000volt



32945 Insulated Industrial Crimping Pliers. Insulation According to VDE 0682/ part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA, Δ up to 1000Volt. Individually Tested. Semi-circular profiles for secure connection between end sleeve and conductor. Long life is achieved through additional induction hardening to 64HRC. Crimps 6 - 30 AWG Connectors.

Item No.	mm	Inch	mm2	AWG	wt.
32945	180	7.0	0.25-2.5	6-30	.64

Insulated Stripping Pliers

Δ 1000volt



32947 Insulated Industrial Stripping Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, 1000Volt Rated. Individually Tested. DIN ISO 5745 Made from Premium CV tool steel forgings. Induction hardened jaws and cutters to 64HRC. Spring & adjusting screw, for stripping up to $\varnothing$ 5mm/#8 Awg.

Item No.	mm	Inch	Copper AWG	wt.
32947	160	6.3	#8 - #28	.46

Insulated Long Nose Pliers With Cutters

 1000volt

329 Insulated Industrial Long Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,  up to 1000Volt. Individually Tested. Drop-forged from special tool steel, cutters additionally induction hardened to approx. 64HRC, half-round jaws, serrated gripping surface.

Item	↔	↔	Cutting Capacity
No.	mm	Inch	Copper AWG
32926	160	6.3	#10
32923	200	8.0	#8

No.	mm	Inch	Copper AWG
32926	160	6.3	#10
32923	200	8.0	#8

PRO-PICK

Insulated BiCut SuperCut

PRO-PICK

Cutting capacity up to 3mm hardened piano wire

 1000volt

32936 Insulated Industrial BiCut SuperCut. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E & CSA,  up to 1000Volt. Individually Tested. For cutting various materials from soft to extremely hard, such as nails, screws, bolts, wire cables, spring wires, chains, etc.

Item	↔	↔	↔
No.	mm	Inch	lbs.
32936	200	8.0	.78

No.	mm	Inch	lbs.
32936	200	8.0	.78

Insulated Pliers Wrench

 1000VOLT

1-7/8" / 49mm Jaw Cap.

11610 Pliers Wrench, With Insulated Handle Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification, Up To 1000Volt. Individually Tested. Chrome-vanadium steel, drop forged, oil hardened.

Item	OAL	OAL	↔
No.	mm	Inch	lbs.
11610	254	10.0"	1.67

No.	mm	Inch	lbs.
11610	254	10.0"	1.67

Insulated Bent Nose Pliers

Angled 40°

 1000volt

329 Bent Nose Pliers With Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-10, NFPA70E and CSA,  up to 1000Volt. Individually Tested. Drop-forged from C70 special tool steel, cutters additionally induction hardened to approx. 64HRC. Ergo comfort grip with slip guard. Serrated gripping surface.

Item	↔	↔	Cutting Capacity	↔
No.	mm	Inch	Copper AWG	lbs.
32928	160	6.3	#10	.42
32901	200	8.0	#8	.48

No.	mm	Inch	Copper AWG	lbs.
32928	160	6.3	#10	.42
32901	200	8.0	#8	.48

Insulated Heavy Duty Cable Cutters

 1000volt

329 Insulated Industrial Serrated Edge Cable Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA,  up to 1000Volt. Individually Tested. Light, clean cutting ground precision cutting edges. Durable cutting is achieved through additional inductive hardening to approx. 64HRC. For cutting of copper and aluminum cables without crushing.

Item	↔	↔	↔	↔	↔
No.	mm	Inch	Ø	mm2	lbs.
32902	180	6.3	20	60	.52
32927	200	8.0	16	50	.78

No.	mm	Inch	Ø	mm2	lbs.
32902	180	6.3	20	60	.52
32927	200	8.0	16	50	.78

Insulated Water Pump Pliers

 1000volt

32954 Insulated Industrial Water Pump Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA,  up to 1000Volt. Individually Tested. 10 opening settings provides optimal adjustment to objects being gripped. Long life achieved through additional induction hardening of jaws to approx. 62HRC. Chrome-vanadium tool steel forgings, hardened and tempered. Black finish.

Item	↔	↔	Capacities		↔
No.	mm	Inch	Round	Hex	wt.
32954	250	10.0	1 3/4	2	.90

No.	mm	Inch	Round	Hex	wt.
32954	250	10.0	1 3/4	2	.90

Insulated Flat Nose Pliers

Two component Soft Grip handles

Extra long head

 1000volt

32941 Long Flat Nose Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-10, NFPA70E & CSA,  up to 1000Volt. Individually Tested. DIN ISO 5745 Serrated Jaws are induction hardened. Special C70 tool steel forgings. Use for Gripping and right-angle bending of wires and sheet metal parts.

Item	↔	↔	↔
No.	mm	Inch	lbs.
32941	160	6.3	.42

No.	mm	Inch	lbs.
32941	160	6.3	.42

Insulated TriCut Strippers and Cutters

 1000volt

32944 Insulated Industrial TriCut Strippers & Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505, NFPA70E and CSA,  up to 1000Volt. Individually Tested. Induction hardened cutters & strippers. Cuts cable, strips cable, strips wire leads. Unique 3 in 1 design provides faster combined cutting and stripping. Strips AWG sizes #10 & #14.

Item	↔	↔	↔
No.	mm	Inch	AWG
32944	170	6.7	#6

No.	mm	Inch	AWG
32944	170	6.7	#6

Rapid & simple push button setting & locking

 1000volt

32956 Insulated Industrial Push Button Water Pump Pliers. Insulation According to VDE, EN/IEC, ASTM, NFPA70E & CSA, Individually Tested. Extra narrow head for working in small spaces. Long life achieved through additional induction hardening of jaws to approx. 62HRC. Finger jam protection for safe operation at all settings. CVM tool steel forgings, hardened & tempered.

Item	↔	↔	Capacities		↔
No.	mm	Inch	Round	Hex	wt.
32956	250	10.0	1 3/4	2	.90

No.	mm	Inch	Round	Hex	wt.
32956	250	10.0	1 3/4	2	.90



Insulated Hex T-handles

Insulation Test Standards:

Insulation according to EN/IEC, ASTM, VDE, DIN, NFPA70E & CSA specification

Blade CVM tool steel, hardened to average 58/60RC

Insulation Molded directly onto blade for permanent bonding



⚡ 1000Volt

334 SAE T-handle, With Wiha-Molded Handle. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item	⚡	⚡	⚡	⚡	⚡
No.	Inch	Inch	Inch	mm	lbs.
33481	5/32	5.9	6.9	176	.09
33482	3/16	5.9	6.9	176	.15
33483	7/32	5.9	6.9	176	.19
33485	1/4	5.9	7.1	176	.20
33486	5/16	5.9	7.1	176	.26
33487	3/8	5.9	7.1	176	.44

⚡ 1000Volt

334 METRIC T-handle, With Wiha-Molded Handle. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item	⚡	⚡	⚡	⚡	⚡
No.	mm	mm	Inch	mm	Inch
33441	4.0	150	5.9	176	6.9
33443	5.0	150	5.9	182	7.1
33445	6.0	150	5.9	182	7.1
33447	8.0	150	5.9	182	7.1
33449	10.0	150	5.9	191	7.5

PRO-PICK



⚡ 1000Volt

33490 6 Piece SAE T-handle Hex Set

Item	⚡ SAE:	⚡
No.	5/32, 3/16, 7/32,	lbs.
33490	1/4, 5/16, 3/8"	1.66

PRO-PICK




⚡ 1000Volt

33478 5 Pc. METRIC T-handle Hex Set

Item	⚡ METRIC:	⚡
No.	4.0, 5.0, 6.0,	lbs.
33478	8.0, 10.0mm	1.20

Wiha Insulated T-handle Metric Nut Drivers

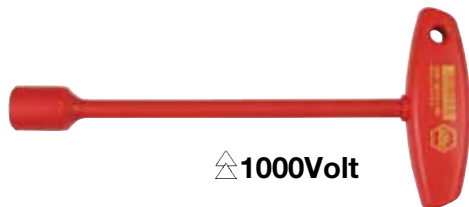

⚡ 1000Volt



336 METRIC T-handle Nut Drivers, With Wiha-Molded Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000Volt. Individually Tested. Blade CVM steel, hardened. Insulation molded directly onto blade. Wiha-SoftFinish® handle, multi-component.

Item	⚡	⚡	⚡	⚡	⚡
No.	mm	mm	Inch	mm	Inch
33632	8.0	200	7.9	232	9.1
33634	10.0	230	9.0	262	10.3
33637	13.0	230	9.0	262	10.3
33641	17.0	230	9.0	268	10.6

Use & Care Guide For Insulated Tools:
Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.

WARNING!

Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.

Wiha Insulated Ratcheting Cable Cutters


Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc



 **1000Volt**

119 High Voltage Double-Insulated Ratcheting Cable Cutters High leverage ratchet cable cutter with shear type blades cuts stranded and flexible copper and aluminum cable. Not for use on steel. Features built in safety release in all cutting positions, and high-visibility comfort grip handles.

Item No.	OAL mm	OAL Inch	up to MCM	Inch Dia.	Inch Cap.
11960	250	10.0"	500	1.25"	32ml
11975	280	11.0"	750	2.0"	52ml

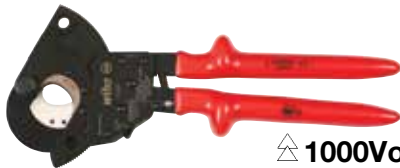

 **1000Volt**

11980	Insulated ACSR Ratcheting Cable Cutter
	Replaceable tool steel cutting blades are securely mounted for accurate cutting. Handles lock in closed position for easier storage. High leverage ratchet mechanism for best cutting performance.

Item	OAL	OAL	up to	Inch	
No.	mm	Inch	MCM	Dia.	Cap.
11980	353	13.9	477	1.25"	32ml

Insulated Cable Cutters



 1000Volt

**For cutting solid aluminum
& copper conductors**

11950 Cable Cutter, With Insulated Handle. Insulation According to EN/IEC, ASTM & CSA Specification, Up To 1000 Volt. Individually Tested. Blade alloyed tool steel. Induction hardened.

Item No.	OAL	OAL	Capacity 		
	mm	Inch	mm	Inch	lbs.
11950	500	19.6	12	1/2"	3.0

For cutting multi strand aluminum
& copper cables



31.5'

 1000Volt

40800 Large Capacity Cable Cutter, With Insulated Handle Insulation According to EN/IEC 60900, ASTM F-1505 & CSA Specification, Up to 1000 Volt. Individually Tested. Easy cutting blades, dropped forged, oil hardened. Cuts cable diameters up to 50mm. Not to be used on steel rods.

Item	OAL	OAL	Capacity 		
No.	mm	Inch	mm	Inch	lbs.
40800	800	31.5	50	2"	8.0

Wiha Insulated Hacksaw



Uses standard 12" blade

 **1000Volt**

19767 Hacksaw, With Insulated Handle
Insulation According to EN/IEC 60900, DIN
ISO, ASTM & CSA Specification,
Up To 1000 Volt. Individually Tested.

Item	OAL	OAL	
No.	mm	Inch	lbs.
19767	457mm	18.0"	1.92

For cutting solid aluminum,
copper & medium hard wires



 1000VOLT

29250 End Cutters, With Insulated Handle. Insulation According to EN/IEC 60900, DIN ISO 8976, ASTM F-1505 & CSA Specification. Individually Tested. Blade alloyed tool steel. Induction hardened.

Item	OAL	OAL	Capacity	
No.	mm	Inch	mm	lbs.
29250	250	10	7/8"	1.1

NOTES:

Wiha Insulated Serrated Tweezers

Meets EN/IEC Insulation Standards

Slip guards at tips
for user safety

Carbon steel
with chrome
nickel plated

1000V

10,000 Volt tested 1000Volt rated

Two layer high
contrast insulated
coatings



1000Volt

75205 Insulated Serrated Straight
Fine Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item No.	OAL mm	OAL Inch	Wt lbs.
75205	130	5.0	.06



1000Volt

75210 Insulated Serrated Straight
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item No.	OAL mm	OAL Inch	Wt lbs.
75210	130	5.0	.08



1000Volt

75215 Insulated Serrated Straight
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item No.	OAL mm	OAL Inch	Wt lbs.
75215	145	6.0	.10



1000Volt

75220 Insulated Serrated Straight
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item No.	OAL mm	OAL Inch	Wt lbs.
75220	200	8.0	.18



1000Volt

75302 Insulated Serrated Angled
Fine Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item No.	OAL mm	OAL Inch	Wt lbs.
75302	145	6.0	.08



1000Volt

75304 Insulated Serrated Angled
Blunt Tip Tweezers, IEC/EN 60900 & CSA
Standards, 10,000 Volt Tested

Item No.	OAL mm	OAL Inch	Wt lbs.
75304	200	8.0	.16

Wiha Insulated Hex Bit Sockets



1000Volt

318 Insulated 3/8" Drive Sockets
Chrome-vanadium steel, forged, oil-hardened.

Item No.	Size Inch	OAL Inch	Wt lbs.
31805	3/16	3.1"	.13
31807	7/32	3.1"	.14
31809	1/4	3.1"	.14
31811	5/16	3.1"	.16
31813	3/8	3.1"	.18
31815	7/16	3.1"	.20
31817	1/2	3.1"	.22

*Sockets must be used with insulated ratchets & extensions



1000Volt

31890 7 Pc. Insulated 3/8" Drive Socket
Set - SAE CV steel, forged, oil-hardened
sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31890	3/16, 7/32, 1/4, 5/16, 3/8, lbs. 1.7 7/16, 1/2"



1000Volt

318 Insulated 1/2" Drive Sockets
Chrome-vanadium steel, forged, oil-hardened.

Item No.	Size Inch	OAL Inch	Wt lbs.
31830	1/4	2.75	.22
31832	5/16	2.75	.24
31834	3/8	2.75	.25
31836	7/16	3.63	.31
31838	1/2	3.63	.34
31840	9/16	3.63	.36
31842	5/8	3.63	.42
31844	3/4	3.63	.51

*Sockets must be used with insulated ratchets & extensions

Wiha Insulated Socket Adapters / Reducers

1000Volt



#31350 #31450 #31460 #31650

Insulated Socket Adapters / Reducers
CV steel, forged, oil-hardened.

Item No.	Size	Wt lbs.
31350	1/4 - 3/8	.05
31450	3/8 - 1/2	.11
31460	3/8 - 1/4	.12
31650	1/2 - 3/8	.22

Wiha Insulated 1/4" Sockets, Accessories & Sets

6 Point



1000Volt

313 Insulated 1/4" Drive Sockets - 6 Point, Insulation According To ASTM F-1505, DIN 7448 & CSA Specification, Up To 1000 Volt. Individually Tested. Chrome-vanadium steel, forged, oil-hardened.

Item No.	Inch	lbs.
31336	3/16	.03
31337	7/32	.03
31338	1/4	.03
31339	9/32	.04
31340	5/16	.04
31341	11/32	.05
31342	3/8	.05
31343	7/16	.06
31344	1/2	.07
31345	9/16	.07

*Sockets must be used with insulated ratchets & extensions

313 Insulated 1/4" Drive Sockets - 6 Point, Insulation According Chrome-vanadium steel, forged, oil-hardened.

Item No.	mm	lbs.
31326	5.0	.03
31327	6.0	.03
31328	7.0	.03
31329	8.0	.04
31330	9.0	.04
31331	10.0	.05
31332	11.0	.05
31333	12.0	.06
31334	13.0	.06
31335	14.0	.07

*Sockets must be used with insulated ratchets & extensions



31396 10-Piece Insulated 1/4" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31396	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16"
lbs. 1.08	

31393 10-Piece Insulated 1/4" Drive Socket Set - Metric CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31393	5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
lbs. 1.08	

Wiha Insulated 1/4" Sets & Accessories



1000Volt

31394 11 Pc. Insulated 1/4" T-handle & Socket Set-SAE CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31394	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16"
lbs. 1.40	Insulated 1/4" T-handle

Each tool individually tested to 10,000 volts & certified to 1000Volt ac or 1500Volt dc



1000Volt

31395 11 Piece Insulated 1/4" T-handle & Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31395	5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
lbs. 1.40	Insulated 1/4" T-handle

1000Volt



31390 13 Pc Insulated 1/4" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31390	3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16"
lbs. 1.39	1/4" x 50mm Extension Bar 1/4" x 100mm Extension Bar 1/4" Ratchet - 140mm



1000Volt

12851 Insulated 1/4" Drive Ratchet, EN/IEC 60900 & CSA Chrome-Vanadium steel. Thumb lever for rapid reverse.

Item No.	OAL Inch	OAL mm	lbs.
12851	1/4"	140	5.5 .28



1000Volt

29006 Insulated 1/4" Drive T-handle, With Insulated Handle. Insulation according to EN/IEC 60900 & CSA specification, up to 1000 Volt. Individually Tested. Blade CV steel, hardened.

Item No.	OAL mm	OAL Inch	lbs.
29006	160	6.2"	.57



1000Volt

128 Insulated 1/4" Extension Bars, ASTM F-1505, EN/IEC 60900 & CSA Chrome-Vanadium steel.

Item No.	OAL Inch	OAL mm	lbs.
12854	1/4"	50	2.0 .08
12855	1/4"	100	3.9 .12

1000Volt



31391 13 Pc. Insulated 1/4" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31391	5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
lbs. 1.41	1/4" x 50mm Extension Bar 1/4" x 100mm Extension Bar 1/4" Ratchet - 140mm

Wiha Insulated 3/8" Sockets



1000Volt

314 Insulated 3/8" Drive Sockets - Insulation according to EN/IEC 60900, DIN 7448 & CSA specification, up to 1000Volt. Individually Tested. CV steel, forged, oil-hardened.

Item No.	Inch	lbs.
31425	1/4	.07
31428	9/32	.07
31429	5/16	.07
31430	11/32	.07
31431	3/8	.08
31432	7/16	.08
31433	1/2	.10
31434	9/16	.10
31435	5/8	.10
31436	11/16	.13
31437	3/4	.14
31438	13/16	.17
31439	7/8	.18

*Sockets must be used with insulated ratchets & extensions



1000Volt

315 Insulated 3/8" Dr. Sockets- METRIC Insulation according to VDE, EN/IEC 60900, DIN 7448 & CSA specification, up to 1000Volt. Individually Tested. Chrome-vanadium steel, forged, oil-hardened.

Item No.	mm	lbs.
31506	6.0	.07
31507	7.0	.07
31508	8.0	.07
31509	9.0	.07
31510	10.0	.07
31511	11.0	.08
31512	12.0	.10
31513	13.0	.10
31514	14.0	.10
31515	15.0	.10
31516	16.0	.10
31517	17.0	.11
31518	18.0	.12
31519	19.0	.14
31520	20.0	.15
31521	21.0	.17
31522	22.0	.18
31524	24.0	.26

*Sockets must be used with insulated ratchets & extensions

Wiha Insulated 3/8" Sockets & Sets



1000Volt

31493 10 Pc. Insulated 3/8" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31493	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"
lbs. 2.50	3/8" x 125mm Extension Bar 3/8" Ratchet - 190mm



1000Volt

31590 10 Pc. Insulated 3/8" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31590	8, 10, 11, 12, 13, 14, 17, 19mm
lbs. 2.50	3/8" x 125mm Extension Bar 3/8" Ratchet - 190mm



1000Volt

31491 16 Piece Insulated 3/8" Drive Socket Set - SAE/METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31491	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"
lbs. 2.01	8, 10, 11, 12, 13, 14, 17, 19mm



1000Volt

31495 24 Pc. Insulated 3/8" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31495	1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4" Sockets
lbs. 9.07	3/8" x 125mm Extension Bar 3/8" x 250mm Extension Bar 3/8" Ratchet - 190mm Insulated Electrician's Knife - 50mm Slotted: 3.5, 4.5, 6.5mm Phillips: #1, 2, 3 6.3" Long Nose Pliers 8.0" Combo Pliers 6.3" Diagonal Cutters

*Sockets must be used with insulated ratchets & extensions



1000Volt

31592 24 Pc. Insulated 3/8" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31592	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19mm Sockets
lbs. 9.08	3/8" x 125mm Extension Bar 3/8" x 250mm Extension Bar 3/8" Ratchet - 190mm Insulated Electrician's Knife - 50mm Slotted: 3.5, 4.5, 6.5mm Phillips: #1, 2, 3 6.3" Long Nose Pliers 8.0" Combo Pliers 6.3" Diagonal Cutters

*Sockets must be used with insulated ratchets & extensions

Wiha Insulated 3/8" Socket Accessories and Sets



△ 1000Volt

12852 Insulated 3/8" Drive Ratchet, EN/IEC 60900 CV steel. Socket release button. Thumb lever for rapid reverse.

Item No.	OAL	OAL	
No.	Inch	mm	Inch lbs.
12852	3/8"	190	7.5 .93



△ 1000Volt

128 Insulated 3/8" Extension Bars, EN/IEC 60900 Chrome-Vanadium steel.

Item No.	OAL	OAL	
No.	Inch	mm	Inch lbs.
12856	3/8"	125	4.9 .41
12857	3/8"	250	9.8 .57



△ 1000Volt

1000Volt Insulated 3/8" Drive T-handle or Breaker Bar. Insulation according to EN/IEC 60900 specification, up to 1000Volt Rated. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	ØMM	OAL	OAL	
No.	Inch	mm	Inch	lbs.
29009	3/8	200	7.9"	.55
12327	3/8	216	8.5"	.68



△ 1000Volt

31496 10 Pc. Insulated 3/8" T-handle & Socket Set- SAE CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31496	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"
lbs.	3/8" x 125mm Extension Bar
2.47	Insulated 3/8" T-handle

31595 10 Pc. Insulated 3/8" T-handle & Socket Set - MM CV steel, forged, oil-hardened sockets. Insulated after EN/IEC 60900.

Item No.	Set includes the following:
31595	8, 10, 11, 12, 13, 14, 17, 19mm
	3/8" x 125mm Extension Bar
lbs. 2.47	Ins. 3/8" T-handle

Wiha Insulated 3/8" Socket Sets On Rails



31596 13-Piece Insulated 3/8" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes:
31596	1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"
lbs. 2.06	



31593 18-Piece Insulated 3/8" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31593	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24mm
lbs. 2.9	

Wiha Insulated 1/2" Sockets



Individually Tested

△ 1000Volt

317 Insulated 1/2" Drive Sockets - Insulation According to ASTM, DIN & CSA Specification, Up To 1000Volt. Individually Tested. CV steel, forged, oil-hardened.

Item No.	Inch	lbs.
31703	5/16	.16
31704	11/32	.16
31705	3/8	.16
31707	7/16	.16
31708	1/2	.16
31709	9/16	.17
31710	5/8	.19
31712	11/16	.19
31713	3/4	.21
31714	13/16	.23
31715	7/8	.27
31716	15/16	.35
31718	1	.33
31720	1-1/8	.44
31722	1-1/4	.58

*Sockets must be used with insulated ratchets & extensions



△ 1000Volt

316 Insulated 1/2" Drive Sockets - METRIC 1000Volt.

Item No.	mm	lbs.
31608	8.0	.15
31609	9.0	.15
31610	10.0	.16
31611	11.0	.16
31612	12.0	.16
31613	13.0	.17
31614	14.0	.17
31615	15.0	.17
31616	16.0	.19
31617	17.0	.19
31618	18.0	.20
31619	19.0	.21
31620	20.0	.25
31621	21.0	.25
31622	22.0	.28
31623	23.0	.29
31624	24.0	.30
31626	26.0	.37
31627	27.0	.41
31628	28.0	.44
31630	30.0	.51
31632	32.0	.55

*Sockets must be used with insulated ratchets & extensions

Wiha Insulated 1/2" Socket Sets



31796 15-Piece Insulated 1/2" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes:
31796	7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/8, 1-1/4"
lbs.	4.20



31793 22-Piece Insulated 1/2" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31793	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32mm
lbs.	6.28



31790 24 Piece Insulated 1/2" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31790	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1" Sockets
↺	1/2" x 125mm Extension Bar
lbs.	1/2" x 250mm Extension Bar
11.41	1/2" Ratchet - 260mm
	Ins. Electrician's Knife - 50mm
	Slotted: 3.5, 4.5, 6.5mm
	Phillips: #1, 2, 3
	6.3" Long Nose Pliers
	8.0" Combo Pliers
	6.3" Diagonal Cutters

31691 24 Piece Insulated 1/2" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31691	8, 9, 10, 12, 13, 14, 15, 17, 19, 22, 24mm Sockets
↺	1/2" x 125mm Extension Bar
lbs.	1/2" x 250mm Extension Bar
11.39	1/2" Ratchet - 260mm
	Ins. Electrician's Knife - 50mm
	Slotted: 3.5, 4.5, 6.5mm
	Phillips: #1, 2, 3
	6.3" Long Nose Pliers
	8.0" Combo Pliers
	6.3" Diagonal Cutters



31792 14 Pc. Insulated 1/2" Drive Socket Set - SAE CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31792	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1"
↺	1/2" x 125mm Extension Bar
lbs.	1/2" x 250mm Extension Bar
7.64	1/2" Ratchet - 190mm



31694 14 Pc. Insulated 1/2" Drive Socket Set - METRIC CV steel, forged, oil-hardened sockets. Insulated to EN/IEC 60900.

Item No.	Set includes the following:
31694	8, 9, 10, 11, 12, 13, 14, 17, 19, 22, 24mm
↺	1/2" x 125mm Extension Bar
lbs.	1/2" x 250mm Extension Bar
7.64	1/2" Ratchet - 190mm

Wiha Insulated 1/2" Socket accessories



12853 Insulated 1/2" Drive Ratchet, IEC/EN 60900 & CSA

Chrome-Vanadium steel. Reversible.

Item No.	OAL	OAL	↺
	Inch	mm	Inch lbs.
12853	1/2"	260	10.2 1.55



128 Insulated 1/2" Extension Bars, EN/IEC 60900 & CSA

Chrome-vanadium steel.

Item No.	OAL	OAL	↺
	Inch	mm	Inch lbs.
12858	1/2"	125	4.9 .45
12859	1/2"	250	9.8 .91



29012 Insulated 1/2" Drive T-handle, With Insulated Handle. Insulation according to EN/IEC 60900 & CSA Specification, Up To 1000Volt. Individually Tested Blade VC steel, hardened.

Item No.	↺	OAL	OAL	↺
	Inch	mm	Inch	lbs.
29012	1/2	200	7.9"	.68



12326 Insulated 1/2" Drive Breaker Bar, IEC/EN 60900 & CSA

Chrome-Vanadium steel.

Item No.	OAL	OAL	↺
	Inch	mm	Inch lbs.
12326	1/2"	267	10.5 1.04

Wiha Insulated Hex L-keys



△ 1000Volt

136 SAE Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000Volt. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Hex	mm	Inch	Inch	lbs.
13670	1/16	79	3.1	.375	.05
13671	5/64	84	3.3	.50	.05
13672	3/32	89	3.5	.625	.05
13673	7/64	94	3.7	.625	.06
13663	1/8	104	4.1	1.0	.06
13665	5/32	104	4.1	1.0	.06
13666	3/16	134	5.3	1.25	.10
13667	7/32	134	5.3	1.5	.12
13668	1/4	134	5.3	1.5	.16
13669	5/16	144	5.7	1.5	.24
13662	3/8	234	9.2	1.63	.51
13664	1/2	234	9.2	1.63	.77




△ 1000Volt

136 METRIC Insulated Hex L-keys, With Insulated Handle. Insulation According to IEC 60900 Specification, Up To 1000Volt. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Hex mm	mm	Inch	mm	lbs.
13650	1.5	100	3.9	20	.09
13651	2.0	105	4.1	20	.09
13652	2.5	115	4.5	20	.09
13653	3.0	130	5.1	25	.10
13654	4.0	120	4.7	40	.10
13655	5.0	140	5.5	45	.10
13656	6.0	140	5.5	45	.13
13658	8.0	150	5.9	50	.24
13659	10.0	220	8.7	50	.51
13657	12.0	260	10.2	60	.77

Insulation Test Standards:
Insulation according to ASTM, F-1505, EN/IEC 60900 and CSA

Insulation
Applied directly onto blade for permanent bonding

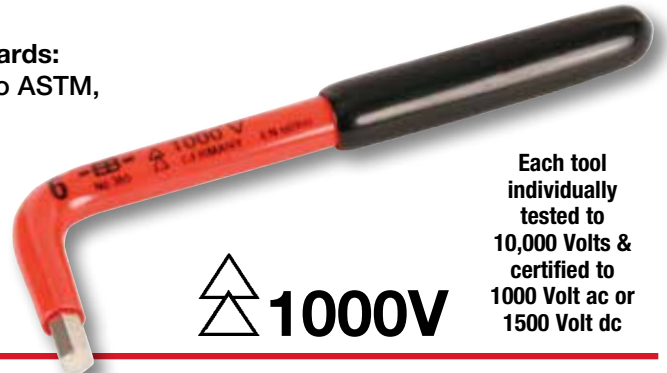

△ 1000V

Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc

△ 1000Volt

13690 8 Piece Insulated SAE Hex L-key Set

Item No.	Hex	OAL	Hex	OAL	lbs.
13690	1/8	4.1	1/4	5.3	2.17
	5/32	4.1	5/16	5.7	
	3/16	5.3	3/8	9.2	
	7/32	5.3	1/2	9.2	



△ 1000Volt

13691 7 Piece Insulated METRIC Hex L-key Set

Item No.	Hex mm	OAL	Hex mm	OAL	lbs.
13691	3.0	130	8.0	150	2.07
	4.0	120	10.0	220	
	5.0	140	12.0	260	
	6.0	140			

△ 1000Volt



13694 12 Pc. Insulated SAE Hex L-key Set

Item No.	Hex	OAL	Hex	OAL	lbs.
13694	1/16	3.1	3/16	5.3	2.40
	5/64	3.3	7/32	5.3	
	3/32	3.5	1/4	5.3	
	7/64	3.7	5/16	5.7	
	1/8	4.1	3/8	9.2	
	5/32	4.1	1/2	9.2	

△ 1000Volt




13693 10 Piece Insulated METRIC Hex L-key Set

Item No.	Hex mm	OAL	Hex mm	OAL	lbs.
13693	1.5	100	5.0	140	2.26
	2.0	105	6.0	140	
	2.5	115	8.0	150	
	3.0	130	10.0	220	
	4.0	120	12.0	260	

Wiha Insulated Open-End Wrenches

Insulation Test Standards:

Insulation according to ASTM F-1505,
EN/IEC 60900, VDE 0680,
DIN 7446 and CSA

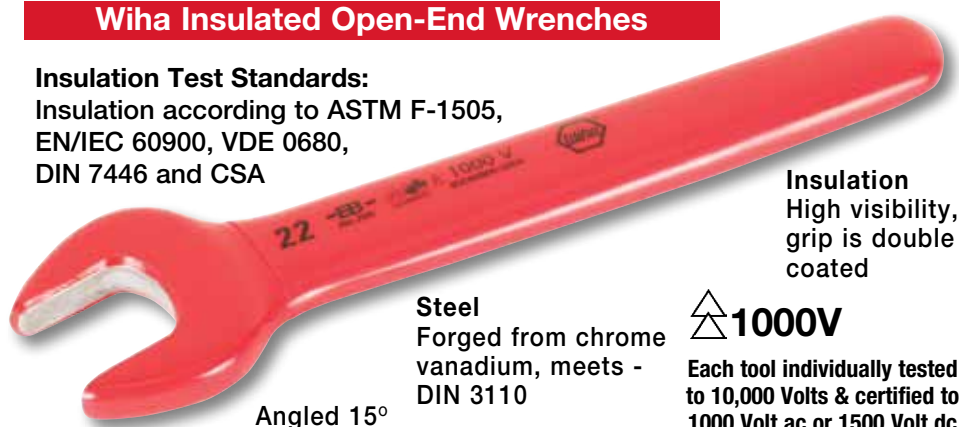

Insulation
High visibility,
grip is double
coated

Steel
Forged from chrome
vanadium, meets -
DIN 3110

1000V

Each tool individually tested
to 10,000 Volts & certified to
1000 Volt ac or 1500 Volt dc

Angled 15°



1000Volt

201 SAE Open-End Wrenches, With Insulated Handle Insulation According to VDE Specification 0680 and EN/IEC 60900, DIN 7446 and CSA, up to 1000Volt. Individually Tested. Chrome-vanadium steel, hardened. Angled 15°.

Item No.	⊗	OAL	OAL	⚡
	Inch	Inch	mm	lbs.
20131	1/4	3.4	87.5	.04
20133	5/16	3.9	100	.05
20135	3/8	4.1	105	.09
20136	7/16	4.6	117	.09
20137	1/2	5.5	140	.15
20138	9/16	5.7	146	.15
20140	5/8	6.2	158	.20
20141	11/16	6.5	165	.23
20142	3/4	7.0	178	.33
20144	13/16	7.5	191	.42
20145	7/8	7.6	192	.44
20146	15/16	7.9	201	.51
20147	1	8.4	213	.61
20148	1-1/16	9.2	233	.79
20149	1-1/8	9.2	233	.77
20151	1-1/4"	7.5		
20154	1-1/2"	7.5		

* Lengths are +/- 5% due to coating process

1000Volt

20190 14 Piece Insulated SAE Open End Wrench Set

Item No.	⊗	OAL	⊗	OAL	⚡
	Inch	Inch	Inch	Inch	lbs.
20190	5/16	3.9	3/4	7.0	5.70
	3/8	4.1	13/16	7.5	
	7/16	4.6	7/8	7.6	
	1/2	5.5	15/16	7.9	
	9/16	5.7	1	8.4	
	5/8	6.2	1-1/16	9.2	
	11/16	6.5	1-1/8	9.1	

1000Volt

20091 15 Piece Insulated METRIC Open End Wrench Set

Item No.	⊗	OAL	⊗	OAL	⚡
	mm	mm	mm	mm	lbs.
20091	6.0	97	14	150	3.0
	7.0	98	15	151	
	8.0	104	16	164	
	9.0	108	17	162	
	10.0	107	19	178	
	11.0	118	22	196	
	12.0	129	24	211	
	13.0	137			



1000Volt

20192 8 Piece Insulated SAE Open End Wrench Set

Item No.	⊗	OAL	⊗	OAL	⚡
	Inch	Inch	Inch	Inch	lbs.
20192	5/16	3.9	9/16	5.7	1.59
	3/8	4.1	5/8	6.2	
	7/16	4.6	11/16	6.5	
	1/2	5.5	3/4	7.0	

1000Volt

20093 8 Piece Insulated METRIC Open End Wrench Set

Item No.	⊗	OAL	⊗	OAL	⚡
	mm	mm	mm	mm	lbs.
20093	6.0	97	13.0	137	1.4
	7.0	98	14.0	150	
	8.0	104	17.0	162	
	10.0	107	19.0	178	



1000Volt

200 METRIC Open-End Wrenches, With Insulated Handle

Item No.	⊗	OAL	OAL	⚡
	mm	mm	Inch	lbs.
20006	6.0	97	3.8	.04
20007	7.0	98	3.9	.05
20008	8.0	104	4.1	.07
20009	9.0	108	4.3	.07
20010	10.0	107	4.2	.08
20011	11.0	118	4.6	.11
20012	12.0	129	5.1	.11
20013	13.0	137	5.4	.19
20014	14.0	150	5.9	.19
20015	15.0	151	5.9	.17
20016	16.0	164	6.5	.22
20017	17.0	168	6.4	.24
20018	18.0	173	6.8	.41
20019	19.0	178	7.0	.32
20022	22.0	196	7.7	.39
20024	24.0	211	8.3	.58

Wiha Insulated Open-End Wrenches

 **1000Volt**


In Tool Box Tray

20194 13 Piece Insulated SAE Open End Wrench Set In Tool Box Tray

Item No.	Hex	OAL	Hex	OAL	Weight
	Inch	Inch	Inch	Inch	lbs.
20194	1/4	3.4	11/16	6.5	4.90
	5/16	3.9	3/4	7.0	
	3/8	4.1	13/16	7.5	
	7/16	4.6	7/8	7.6	
	1/2	5.5	15/16	7.9	
	9/16	5.7	1	8.4	
	5/8	6.2			

In Tool Box Tray


 **1000Volt**

20196 13 Pc. Insulated METRIC Open End Wrench Set In Tool Box Tray

Item No.	Hex	OAL	Hex	OAL	Weight
	mm	mm	mm	mm	lbs.
20196	8.0	104	16.0	164	4.90
	10.0	107	17.0	168	
	11.0	118	18.0	173	
	12.0	129	19.0	178	
	13.0	137	22.0	196	
	14.0	150	24.0	211	
	15.0	151			

Wiha Insulated Ratchet Wrenches

Insulation Test Standards:

Insulation according to ASTM F-1505, EN/IEC 60900, ISO 3110 and CSA Specification



Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc

Steel
Forged from chrome vanadium, meets - DIN 3110

 **1000V**

 **1000Volt**

213 SAE Insulated Ratchet Wrenches, With Insulated Handle Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000 Volt. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Hex	OAL	OAL	Weight
	Inch	mm	Inch	lbs.
21319	1/4	188	7.4	.11
21321	5/16	188	7.4	.12
21323	11/32	188	7.4	.13
21325	3/8	140	5.5	.14
21327	7/16	143	5.6	.15
21329	1/2	154	6.1	.18
21331	9/16	162	6.4	.22
21333	5/8	177	7.0	.30
21334	11/16	260	10.25	.44
21335	3/4	209	8.2	.46
21336	13/16	337	13.25	.80
21337	7/8	337	13.25	.72


 **1000Volt**

212 METRIC Insulated Ratchet Wrenches, With Insulated Handle Insulation According to EN/IEC 60900, ISO 3110 Specification. Individually Tested. Blade chrome-vanadium steel, hardened.

Item No.	Hex	OAL	OAL	Weight
	mm	mm	Inch	lbs.
21208	8.0	125	4.9	.08
21209	9.0	188	7.4	.13
21210	10.0	140	5.5	.12
21211	11.0	210	8.25	.21
21212	12.0	150	5.9	.18
21213	13.0	152	6.0	.18
21214	14.0	163	6.4	.22
21215	15.0	260	10.25	.37
21216	16.0	260	10.25	.42
21217	17.0	193	7.6	.38
21218	18.0	260	10.25	.49
21219	19.0	210	8.3	.45


 **1000Volt**

21391 6 Piece SAE Insulated Ratchet Wrenches Set

Item No.	Hex	OAL	Hex	OAL	Weight
	Inch	Inch	Inch	Inch	lbs.
21391	3/8	5.5	9/16	6.4	1.95
	7/16	5.6	5/8	7.0	
	1/2	6.1	3/4	8.2	


 **1000Volt**

21290 7 Piece METRIC Insulated Ratchet Wrenches Set

Item No.	Hex	OAL	Hex	OAL	Weight
	mm	mm	mm	mm	lbs.
21290	8.0	4.9	14.0	6.4	2.10
	10.0	5.5	17.0	7.6	
	12.0	5.9	19.0	8.3	
	13.0	6.0			

Wiha Insulated Deep Offset Ring Wrenches

Insulation Test Standards:

Insulation according to
ASTM F-1505, EN/IEC
60900,
ISO 3110 and CSA
Specification



Steel Forged from
chrome vanadium,
meets - DIN 3110

Each tool individually
tested to 10,000 Volts
& certified to 1000 Volt
ac or 1500 Volt dc

△1000V

△1000Volt



21096 8 Piece SAE Insulated Offset Ring Wrenches Set

Item No.	SAE:	lbs.
21096	5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4"	3.20



△1000Volt

21094 16 Piece Inch Insulated Offset Ring Wrenches Set

Item No.	SAE:	lbs.
21094	1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 25/32, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/4"	8.70

△1000Volt



21095 8 Piece METRIC Insulated Offset Ring Wrenches Set

Item No.	METRIC:	lbs.
21095	10.0, 11.0, 12.0, 13.0, 14.0, 15.0, 17.0, 19.0mm	3.20



△1000Volt

21093 16 Piece METRIC Insulated Offset Ring Wrenches Set

Item No.	METRIC:	lbs.
21093	8.0, 9.0, 10.0, 11.0, 12.0, 13.0, 14.0, 15.0, 17.0, 19.0, 20.0, 22.0, 24.0, 27.0, 30.0, 32.0mm	8.70



△1000Volt

210 Insulated SAE Offset Ring Wrenches Blade CV steel, hardened.

Item No.	Wrench	Blade	CV steel, hardened.
No.	Inch	lbs.	
21040	1/4	.16	
21042	5/16	.18	
21044	3/8	.20	
21046	7/16	.22	
21048	1/2	.30	
21050	9/16	.30	
21052	5/8	.34	
21054	11/16	.34	
21056	3/4	.44	
21057	25/32	.58	
21058	13/16	.52	
21060	7/8	.64	
21062	15/16	.90	
21064	1.0	.96	
21066	1-1/16	1.28	
21068	1-1/4	1.38	



△1000Volt

210 Insulated METRIC Offset Ring Wrenches, Insulation According to EN/IEC 60900, ISO 3110 Specification, Up To 1000Volt. Individually Tested. Blade Chrome-Vanadium steel, hardened.

Item No.	Wrench	OAL	OAL	lbs.
No.	mm	mm	Inch	
21008	8.0	159	6.3	.16
21009	9.0	159	6.3	.18
21010	10.0	171	6.8	.20
21011	11.0	178	7.0	.22
21012	12.0	191	7.5	.30
21013	13.0	194	7.6	.30
21014	14.0	203	8.0	.34
21015	15.0	203	8.0	.34
21017	17.0	219	8.6	.44
21019	19.0	241	9.5	.52
21020	20.0	250	9.8	.58
21022	22.0	257	10.1	.64
21024	24.0	279	11.0	.90
21027	27.0	286	11.3	.96
21030	30.0	311	12.3	1.28
21032	32.0	318	12.5	1.38

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation, always wear approved eye protection, Inspect insulation prior to each use of any insulated tool. Use insulated tools where the ambient temperature is between -20 to +70° C. Have a qualified safety technician visually inspect insulation on tools annually for safe use.

Wiha Insulated Adjustable Wrenches



△1000Volt

76208 Insulated 8" Adjustable Wrench

Insulation According to ASTM, EN/IEC, NFPA, CSA and ISO Specification, up to 1000Volt. Individually Tested. Etched on scale for pre-setting size. Slip guard handle for added protection.

Item No.	OAL	OAL	Capacity	Opening	lbs.
	Inch	mm			
76208	8.0	200	1"	.7	

△1000Volt

76210 Insulated 10" Adjustable Wrench

Etched on scale for pre-setting size. Slip guard handle for added protection.

Item No.	OAL	OAL	Capacity	Opening	lbs.
	Inch	mm			
76210	10.0	250	1-1/4"	1.4	

△1000Volt

76212 Insulated 12" Adjustable Wrench

Etched on scale for pre-setting size. Slip guard handle for added protection.

Item No.	OAL	OAL	Capacity	Opening	lbs.
	Inch	mm			
76212	12.0	300	1-1/2"	1.9	



△1000Volt

76290 3 Pc. Insulated Adjustable Wrenches

Etched on scale for pre-setting size. Slip guard handle for added protection.

Item No.	Set includes the following:	lbs.
76290	8.0", 10.0", 12.0" Adjustable Pliers	4.0

Wiha Insulated Electrician's Knives

Insulation Test Standards:

Insulation according to ASTM, EN/IEC, VDE & CSA Specification Individually tested

Insulation molded on for permanent bonding



△1000V

Each tool individually tested to 10,000 volts & rated to 1000Volt ac or 1500Volt dc



△1000Volt

15000 Insulated Electrician's Cable Stripping Knife, With Insulated Handle, Insulation According To VDE Specification, Up To 1000Volt. Individually Tested.

Blade tool steel, hardened, molded directly on. Cover included.

Item No.	Blade	OAL	OAL	Opening	lbs.
	mm	mm	Inch		
15000	50	216	8.5	.30	



△1000Volt

15003 Insulated Electrician's Cable Stripping Knife, With Insulated Handle, Insulation According To VDE Specification, Up To 1000Volt. Individually Tested. Straight, partly insulated, strong blade. Insulation molded directly on. Cover included.

Blade tool steel, hardened, molded directly on. Cover included.

Item No.	Blade	OAL	OAL	Opening	lbs.
	mm	mm	Inch		
15003	50	230	9.0	.23	



△1000Volt

15050 Insulated Stripping Knife, With Insulated Handle Insulation According To VDE Specification, Up To 1000Volt. Individually Tested. Blade tool steel, hardened. Insulation molded directly on. Hooked cutting edge, half-round ground. Cover included.

Item No.	Blade	OAL	OAL	Opening	lbs.
	mm	mm	Inch		
15050	35	222	8.75	.22	

NOTES:

WARNING!

Insulated Tools are intended to provide protection against accidental contact with charged energized circuits. For maximum safety we recommend de-energizing all circuits whenever possible before starting work on electrical apparatus or conductors. Always visually inspect insulation on tools before use, do not use tools if insulation shows signs of wear or damage to the insulated areas of the tool. Wear appropriate eye protection when using hand tools. Use NFPA70E certified insulated protective outer wear when appropriate.

Numerical Index by Item Number

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
10250	17	20133	34	21216	35	28393	13	31396	29
11610	25	20135	34	21217	35	28394	13	31425	30
11950	27	20136	34	21218	35	28395	13	31428	30
11960	27	20137	34	21219	35	28396	14	31429	30
11975	27	20138	34	21290	35	28398	14	31430	30
11980	27	20140	34	21319	35	28399	14	31431	30
12326	32	20141	34	21321	35	28700	15	31432	30
12327	31	20142	34	21323	35	28724	15	31433	30
12851	29	20144	34	21325	35	28726	15	31434	30
12852	31	20145	34	21327	35	28727	15	31435	30
12853	32	20146	34	21329	35	28734	15	31436	30
12854	29	20147	34	21331	35	28736	15	31437	30
12855	29	20148	34	21333	35	28738	15	31438	30
12856	31	20149	34	21334	35	28740	15	31439	30
12857	31	20151	34	21335	35	28741	15	31450	28
12858	32	20154	34	21336	35	28742	15	31460	28
12859	32	20190	34	21337	35	28750	15	31491	30
13650	33	20192	34	21391	35	28751	15	31493	30
13651	33	20194	35	25505	6	28752	15	31495	30
13652	33	20196	35	25506	6	28781	15	31496	31
13653	33	21008	36	25511	6	28789	15	31506	30
13654	33	21009	36	28301	13	28791	16	31507	30
13655	33	21010	36	28302	13	28792	16	31508	30
13656	33	21011	36	28303	13	28795	16	31509	30
13657	33	21012	36	28304	13	29006	29	31510	30
13658	33	21013	36	28307	12	29009	31	31511	30
13659	33	21014	36	28308	12	29012	32	31512	30
13662	33	21015	36	28309	12	29250	27	31513	30
13663	33	21017	36	28310	12	30114	16	31514	30
13664	33	21019	36	28311	13	30138	16	31515	30
13665	33	21020	36	28312	12	30152	16	31516	30
13666	33	21022	36	28315	12	30190	16	31517	30
13667	33	21024	36	28316	13	30192	16	31518	30
13668	33	21027	36	28317	12	30700	7	31519	30
13669	33	21030	36	28319	12	30701	7	31520	30
13670	33	21032	36	28320	12	30711	7	31521	30
13671	33	21040	36	28321	12	30712	7	31522	30
13672	33	21042	36	28325	12	30746	10	31524	30
13673	33	21044	36	28326	12	30747	10	31590	30
13690	33	21046	36	28327	12	30770	11	31592	30
13691	33	21048	36	28328	13	31326	29	31593	31
13693	33	21050	36	28329	12	31327	29	31595	31
13694	33	21052	36	28330	12	31328	29	31596	31
15000	37	21054	36	28331	12	31329	29	31608	31
15003	37	21056	36	28332	12	31330	29	31609	31
15050	37	21057	36	28333	12	31331	29	31610	31
19767	27	21058	36	28334	12	31332	29	31611	31
20006	34	21060	36	28335	12	31333	29	31612	31
20007	34	21062	36	28336	12	31334	29	31613	31
20008	34	21064	36	28337	12	31335	29	31614	31
20009	34	21066	36	28338	12	31336	29	31615	31
20010	34	21068	36	28339	12	31337	29	31616	31
20011	34	21093	36	28340	12	31338	29	31617	31
20012	34	21094	36	28341	12	31339	29	31618	31
20013	34	21095	36	28342	12	31340	29	31619	31
20014	34	21096	36	28343	12	31341	29	31620	31
20015	34	21103	17	28344	12	31342	29	31621	31
20016	34	21105	17	28346	12	31343	29	31622	31
20017	34	21208	35	28347	12	31344	29	31623	31
20018	34	21209	35	28348	12	31345	29	31624	31
20019	34	21210	35	28350	16	31350	28	31626	31
20022	34	21211	35	28372	12	31390	29	31627	31
20024	34	21212	35	28373	12	31391	29	31628	31
20091	34	21213	35	28390	14	31393	29	31630	31
20093	34	21214	35	28391	14	31394	29	31632	31
20131	34	21215	35	28392	14	31395	29	31650	28

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
31691	32	32084	5	32302	8	32984	22		
31694	32	32085	11	32303	8	32985	23		
31703	31	32086	22	32304	8	32986	23		
31704	31	32087	6	32305	8	32987	23		
31705	31	32088	11	32306	8	32988	23		
31707	31	32089	7	32308	8	32989	23		
31708	31	32090	4	32366	8	32990	23		
31709	31	32091	5	32400	7	32999	23		
31710	31	32092	5	32401	7	33441	26		
31712	31	32093	5	32402	7	33443	26		
31713	31	32094	5	32403	7	33445	26		
31714	31	32095	6	32490	14	33447	26		
31715	31	32097	5	32505	8	33449	26		
31716	31	32099	5	32511	8	33478	26		
31718	31	32100	4	32512	10	33481	26		
31720	31	32101	4	32513	10	33482	26		
31722	31	32102	4	32514	10	33483	26		
31790	32	32103	4	32515	10	33485	26		
31792	32	32105	4	32516	8	33486	26		
31793	32	32106	11	32517	10	33487	26		
31796	32	32107	11	32518	10	33490	26		
31805	28	32108	11	32519	10	33532	4		
31807	28	32145	10	32521	8	33632	26		
31809	28	32146	10	32526	8	33634	26		
31811	28	32188	6	32531	8	33637	26		
31813	28	32189	11	32536	8	33641	26		
31815	28	32190	6	32541	8	35811	5		
31817	28	32192	6	32546	8	35812	5		
31830	28	32194	11	32551	8	35844	10		
31832	28	32195	10	32556	8	35845	10		
31834	28	32196	11	32590	8	35890	5		
31836	28	32197	10	32592	8	35891	5		
31838	28	32198	10	32596	11	38050	17		
31840	28	32199	7	32800	18	38051	17		
31842	28	32206	9	32801	18	40800	27		
31844	28	32209	9	32900	24	61630	17		
31890	28	32212	9	32901	25	75205	28		
32000	11	32215	9	32902	25	75210	28		
32001	11	32218	9	32923	25	75215	28		
32002	11	32221	9	32926	25	75220	28		
32003	11	32224	9	32927	25	75302	28		
32004	11	32227	9	32928	25	75304	28		
32005	4	32230	9	32929	24	76208	37		
32010	4	32233	9	32930	24	76210	37		
32012	4	32236	9	32933	24	76212	37		
32015	4	32238	9	32934	21	76290	37		
32017	4	32239	9	32935	21	91596	20		
32023	4	32240	9	32936	25	91890	19		
32024	4	32241	9	32937	21				
32025	4	32255	9	32938	24				
32026	4	32258	9	32939	24				
32027	4	32261	9	32941	25				
32031	4	32264	9	32942	22				
32034	4	32267	9	32944	25				
32039	4	32268	9	32945	24				
32042	4	32270	9	32947	24				
32045	4	32273	9	32948	24				
32046	10	32276	9	32951	17				
32049	10	32278	9	32954	25				
32052	10	32280	9	32956	25				
32055	10	32288	9	32960	20				
32058	10	32291	9	32968	21				
32079	11	32292	9	32973	22				
32080	20	32293	9	32977	22				
32081	20	32294	9	32981	22				
32083	5	32296	9	32983	22				



Prop65 WARNING:
Cancer or reproductive harm.
For more information go to
www.P65warnings.ca.gov/



Insulation Test



Cold Impact Test



Material Integrity Test



Puncture Test



Flame Resistance Test



Adhesion Test



No Hassle Guarantee

Wiha branded tools are regarded as the most durable, best designed and highly innovative products around. Our tools are used by demanding professional tradespeople and tool aficionados alike. They are meant to be used and utilized often. However, if you are not happy for any reason return them within 12 months of purchase with proof of purchase and we will Repair or Replace.

Rest assured, if for some reason there is a defect in material or workmanship we will replace your tool free of charge for as long as you own the tool.

Failures due to misuse, abuse or normal wear and tear are not covered by this guarantee. We stand by our products with what we believe is the best No Hassle Guarantee in the industry.

Exclusions

Wiha Tools has the right to exclude Bits, Tweezers and Ceramic Screwdrivers. These products are either consumable or wear easily.

All torque tools are designed for 5,000 cycles or 1 year (whichever comes first). If a tool becomes out of specification within that period Wiha Tools will Repair or Replace. Visit www.wihatools.com to learn more about our Torque Control Service Program.

Legal

Some areas do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This guarantee gives you specific rights, and you may also have other rights, which vary, from state to state, province to province, or country to country.

This No Hassle Guarantee is the sole and exclusive guarantee for the Willi Hahn Corporation dba Wiha Tools. No employee, agent, dealer, or other person is authorized to alter this guarantee or make any other guarantees on behalf of Wiha Tools.



Wiha Quality Tools

1348 Dundas Circle
Monticello, MN 55362
tel: 763.295.6591
fax: 763.295.6598

Wiha Tools Canada Ltd.

www.wihatools.ca
Brampton, ONT L6T 4X4
tel: 866.494.0096 or 763.295.6591
fax: 763.295.6598

To:

(800) 494-6104
fax: (800) 494-7456
cservice@wihatools.com
www.wihatools.com

Subject to change without notice

©2023 Willi Hahn Corporation

@Torx is a registered trademark of Acument Intellectual Properties LLC.
Catalog Item No. 99919
version - 1/1/23