

WARNING!

The HAKKO 980 is a 20 watt soldering tool for light to medium duty applications. The switch on top of the iron turns on the 130 watt feature, for occasional heavy duty soldering.

FOR YOUR SAFETY...

DO NOT HOLD THE HIGH HEAT SWITCH 'ON' FOR MORE THAN 30 SECONDS!

FAILURE TO HEED THIS WARNING WILL CAUSE THE IRON HOUSING TO MELT!



DON'T...

HIT THE IRON AGAINST A HARD OBJECT..

- You could break the ceramic heater.

USE A FILE ON THE TIP.

- You could destroy the tip.

CAUTION:


-The tip and heater tube will be VERY HOT when the iron is plugged in.

HELPFUL HINTS:

- Clean the pieces to be soldered first. This will help to ensure good joints.
- Always prepare (tin) the tip before soldering.
- Always coat the tip after soldering.
- Heat the parts you are going to solder before you apply the solder for better flow and stronger joints.
- Don't leave the iron in contact with the joint any longer than is necessary for proper solder flow.
- Don't move the assembled parts until the solder has cooled.
- We recommend using the largest tip possible for each application.

NOTE

IT'S A GOOD IDEA TO HAVE A HOLDER AND CLEANER FOR YOUR HAKKO IRON. WE RECOMMEND THE HAKKO 602, BELOW.

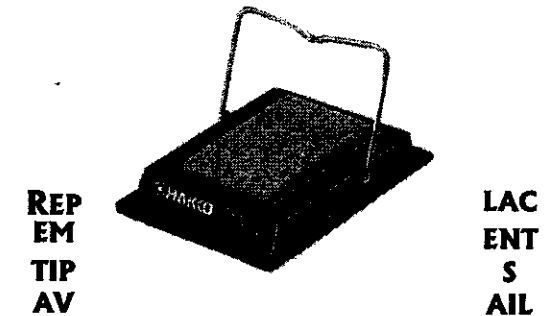

REP
EM
TIP
AV

LAC
ENT
S
AIL

ABLE
FOR THE HAKKO P980:
Point: 980-T-B (Standard)
Bevel: 980-T-BC
Chisel: 980-T-D

For more information on HAKKO products, contact:

25072 Anza Dr.
Santa Clara, California 95055, Inc.
Phone: (805) 294-0090 Fax: (805) 294-0096
Toll free: 1-800-88-HAKKO