






Retrofit Rack Grounding Kits

- Provide a dedicated ground system to maintain system performance and protect network equipment when equipment is already installed
- Provide a complete system of matched components that can be easily selected to save cost and labor
- Optimized for installation on 19" racks that meet EIA-310-D, with functioning equipment, and are deployed in the field
- Thread-forming screws eliminate the need to manually remove paint from the rack
- Engineered to comply with US and International grounding requirements

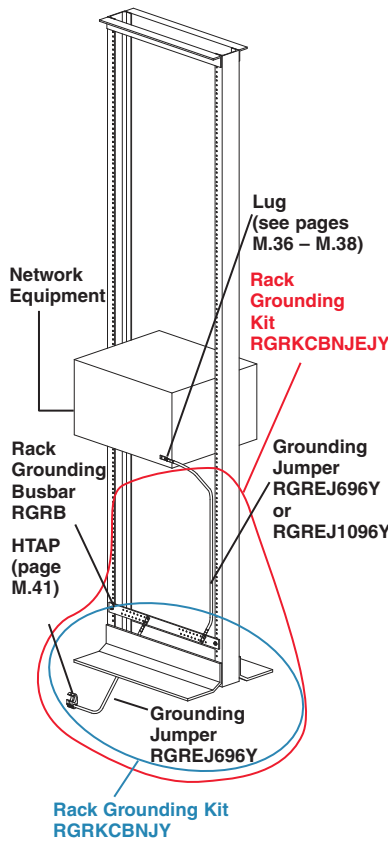

| Part Number | Part Description | Std. Pkg. Qty. |
|-------------------------------|---|----------------|
| Busbar and Jumper Kits | | |
| RGRKCBNJEJY | Rack grounding kit to ground the rack and one piece of equipment; includes one RGRB19U busbar, one HTCT250-2-1 HTAP, and two RGREJ696Y grounding jumpers. | 1 |
| RGRKCBNJV | Rack grounding kit to ground the rack; includes one RGRB19U busbar, one HTCT250-2-1 HTAP, and one RGREJ696Y grounding jumper. | 1 |
| Busbar Kits | | |
| RGRB19Y | Grounding busbar; 19" (483mm) length; tin-plated; fourteen holes arranged for flexibility in mounting with twenty #12-24 x 1/2" and M6 x 12mm thread-forming screws. | 1 |
| RGRB19U | Grounding busbar; 19" (483mm) length; tin-plated; twenty holes arranged for flexibility in mounting with twenty #12-24 x 1/2" hex head screws installed; mounting hole sets have 5/8" (15.9mm) spacing; provided with two each #12-24 x 1/2", M6 x 12mm thread-forming screws, and two #12 flat washers for mounting. | 1 |
| RGRB19CN | Grounding busbar; 19" (483mm) length; tin-plated; twenty holes arranged for flexibility in mounting with twenty #12-24 x 1/2" hex head screws installed; mounting hole sets have 5/8" (15.9mm) spacing; provided with two bonding cage nuts and four #12-24 bonding screws. | 1 |
| Equipment Jumper Kits | | |
| RGREJ696Y | Grounding jumper; #6 AWG (16mm ²); 96" (2.44m) length; one end factory terminated to lug; provided with .16 oz. (5cc) of antioxidant and two each #12-24 x 1/2", M6 x 12mm, #10-32 x 1/2" and M5 x 12mm thread-forming screws. | 1 |
| RGREJ1096Y | Grounding jumper; #10 AWG (6mm ²); 96" (2.44m) length; one end factory terminated to lug; provided with .16 oz. (5cc) of antioxidant and two each #12-24 x 1/2", M6 x 12mm, #10-32 x 1/2" and M5 x 12mm thread-forming screws. | 1 |