

# Data Timing Generator

## DTG5078 • DTG5274 • DTG5334 Data Sheet



### Features & Benefits

- Versatile Platform Combines Features of Data Generator, Pulse Generator, and DC Source
- Up to 3.35 Gb/s Data Rate
- From 1 to 96 Data Channels (Master/Slave)
- Class Leading Delay Resolution of 0.2 ps (DTG5274/DTG5334), 1 ps (DTG5078), up to 600 ns of Total Delay
- Modular Architecture Helps to Protect Your Investment and Allows the Instrument to Expand With Your Growing Needs
- Advanced Control Over Signal Parameters to Meet Most Current Testing Needs, Including Stressed Eye Generation
  - External Jitter Injection (DTGM31, DTGM32 Modules)
  - Level Control with 5 mV Resolution
- Easy to Use and Learn, Shortens Time to Test
  - Easily Configure with Plug-in Modules
  - Intuitive Windows User Interface
  - Benchtop Form Factor
  - Integrated PC Supports Network Integration and Built-in CD-ROM, LAN, Floppy Drive, USB Ports
- Up to 64 Mb Pattern Depth Per Channel for Complex Data Patterns

### Applications

- Semiconductor Device Functional Test and Characterization
  - Support for Semiconductor Technologies from TTL to LVDS
  - Initial Verification and Debugging, Comprehensive Characterization, Manufacturing, and Quality Control
- Compliance and Interoperability Testing to Emerging Standards
  - PCI-Express Gen1:2.5 Gbps
  - Serial ATA Gen1/2:1.5 Gbps/3 Gbps
  - InfiniBand 2.5 Gbps
  - XAUI: 3.125 Gbps
  - HDMI: Version 1.3 / DVI
- Magnetic and Optical Storage Design
  - Research, Development, and Test of Next-generation Devices (HDD, DC/DVD, Blu-ray)
- Data Conversion Device Design
  - Characterization and Test of Next-generation D/A Convertors
- Imaging Sensor Device Design
  - Characterization and Functional Testing of Next-generation Imaging Devices (CCD/CMOS)
- Jitter Transfer and Jitter Tolerance Testing

New serial data standards, expanding networks, and ubiquitous computing continually redefine the cutting edge of technology. The design engineer is challenged to economize without sacrificing performance.

The DTG5000 Series combines the power of a data generator with the capabilities of a pulse generator in a versatile, benchtop form factor, shortening the duration of complex test procedures and simplifying the generation of low-jitter, high-accuracy clock signals, parallel or serial data across multiple channels. Its modular platform allows you to easily configure the performance of the instrument to your existing and emerging needs to minimize equipment costs. Three mainframes and five plug-in output modules combine to cover a range of applications from legacy devices to the latest technologies. In addition, eight low-current, independently-controlled DC outputs can substitute for external power supplies. Each mainframe incorporates a full compliment of auxiliary input and output channels to easily integrate with other instruments, such as oscilloscopes and logic analyzers, to create a flexible and powerful lab.

## Characteristics

### Mainframe Characteristics

#### Basic Features

**Platform** – Benchtop mainframe with cold-swappable plug-and-play plug-in output modules. Mainframes accept any combination of output modules.

#### Number of Slots for Output Modules –

DTG5078: 8 slots (A, B, C, D, E, F, G, H).

DTG5274: 4 slots (A, B, C, D).

NewDTG5334: 4 slots (A, B, C, D).

#### Master-Slave Capabilities –

DTG5078: Up to three DTG5078 mainframes can be connected in Master-Slave configuration.

DTG5274: Up to two DTG5274 mainframes can be connected in Master-Slave configuration.

DTG5334: Up to two DTG5334 mainframes can be connected in Master-Slave configuration.

#### Operating Modes –

Pulse Generator Mode (slots A to D only).

Data Generator Mode.

#### Output Patterns –

NRZ, RZ, R1, Pulse patterns (DTG5078/5274/5334: Slot A-D; DTG5078 Slot E-H, NRZ only).

### Timing Parameters

#### Data Rate Range –

DTG5078:

NRZ: 50 Kb/s to 750 Mb/s.

RZ, R1, Pulse Mode: 50 Kb/s to 375 Mb/s.

DTG5274:

NRZ: 50 Kb/s to 2.7 Gb/s.

RZ, R1, Pulse Mode: 50 Kb/s to 1.35 Gb/s.

DTG5334:

NRZ: 50 Kb/s to 3.35 Gb/s (settable to 3.4 Gb/s)

RZ, R1, Pulse Mode: 50 Kb/s to 1.675 Gb/s (settable to 1.7 Gb/s)

#### Data Rate (Setting) Resolution –

Internal Clock : 8 digits.

External Clock : 4 digits.

External Phase Lock In : 4 digits.

### Output Timing Controls

#### Delay Range –

PG Mode: 0 to 3  $\mu$ s.

DG Mode:

Long Delay Off: 0 to 5 ns (NRZ, RZ, R1).

Long Delay On: NRZ:

Period  $\geq 1.25$  ns: 0 to 300 ns (Hardware sequence) or to 600 ns (Software sequence).

Period  $< 1.25$  ns: 0 to (240 ns  $\times$  period) (Hardware sequence) or to (480 ns  $\times$  period) (Software sequence).

Long Delay On: RZ/R1:

Period  $\geq 2.5$  ns: 0 to 300 ns (Hardware sequence) or to 600 ns (Software sequence).

Period  $< 2.5$  ns: 0 to (120 ns  $\times$  period) (Hardware sequence) or to (240 ns  $\times$  period) (Software sequence).

#### Delay Resolution –

DTG5078: 1 ps.

DTG5274/5334: 0.2 ps.

#### Phase Resolution – 0.1%

#### Differential Timing Offset Feature [between pair of two adjacent channels (Odd and Even)] –

Range: -1.0 to 1.0 ns.

Resolution:

DTG5078: 1 ps.

DTG5274/5334: 0.2 ps.

#### Semiautomatic Deskew Calibration –

Range: 500 ps.

Accuracy (after skew calibration):

100 ps, slots A to D.

200 ps, slots E to H (DTG5078 only).

**Duty Cycle Adjustment Range** – 0 to 100% (with 0 delay setting, RZ, R1, Pulse mode only).

**Duty Cycle Adjustment Resolution** – 0.1%.

**Pulse Width Maximum Range** – 290 ps to (period - 290 ps) (RZ, R1, Pulse mode only).

(Range also depends on delay settings.)

**Pulse Width Resolution** – 5 ps.

### Jitter Performance (output channels)

#### Clock Pattern ("1010..." clock pattern)

#### Random Jitter –

DTG5078:  $< 4$  ps<sub>RMS</sub> (at 750 Mb/s with DTGM21, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).

DTG5274:  $< 3$  ps<sub>RMS</sub> (at 2.7 Gb/s with DTGM30, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).

DTG5334:  $< 3$  ps<sub>RMS</sub> (at 3.35 Gb/s with DTGM30, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).

### Maximum Number of Output Channels

Number of Like Mainframes	DTG5078*1			DTG5274, DTG5334*1		
	DTGM21	DTGM30	DTGM31 DTGM32	DTGM21	DTGM30	DTGM31 DTGM32
1	32	16	3	8	8	4
2	64	32	6	16	16	8
3	96	48	9	–	–	–

\*1 The DTG5078 has a limit to the number of modules that may be installed; the total must be less than 100. The coefficient for each module is shown below.

DTGM30: 8, DTGM21: 10, DTGM31: 33, DTGM32: 32

**Data Pattern (PRBS pattern 2<sup>15</sup>-1)****Total Jitter –**

DTG5078: at 750 Mb/s

<18 ps<sub>RMS</sub>, <85 ps<sub>p-p</sub> (typical) with DTGM21, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).

DTG5274: at 2.7 Gb/s

<16 ps<sub>RMS</sub>, <60 ps<sub>p-p</sub> (typical) with DTGM30, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).<14 ps<sub>RMS</sub>, <60 ps<sub>p-p</sub> (typical) with DTGM31, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).

DTG5334: at 3.35 Gb/s.

<15 ps<sub>RMS</sub>, 50 ps<sub>p-p</sub> (typical) with DTGM30, 0.8 V and DTGM31, 0.8 V<sub>p-p</sub>, delay: 0.0 ns); <13 ps<sub>RMS</sub>, 50 ps<sub>p-p</sub> (typical) with DTGM31, 0.8 V and DTGM31, 0.8 V<sub>p-p</sub>, delay: 0.0 ns).<44 ps<sub>p-p</sub> with DTGM30, Delay: 0.0 ns, Amplitude = 0.4 V<sub>p-p</sub>, Offset = 0.0 V, Data Format = NRZ, Jitter Mode = Off, an ambient temperature of 20 to 30 °C.**Signal Control Features****Cross-point Adjustment (duty cycle distortion) –**

Range: 30% to 70%.

Resolution: 1%.

(Slots A to D, and DTGM30/M31/M32 used in NRZ mode.)

**Jitter Generation –**

Jitter All or Partial Pattern.

Jitter Profile: Sine, Gaussian Noise, Square, Triangle.

Jitter Freq./Res.: 0.015 Hz to 1.56 MHz / 1 mHz.

Jitter Amplitude: Up to 16.5 UI<sub>p-p</sub> (depending on data rate and jitter frequency).

(Internal Jitter Generation available on Channel A1 only.)

**Pulse and Data Features****Pulse Generator (PG) Features (unique to PG mode) –**

Continuous or Burst.

Burst Count: 1 to 65,536.

Pulse Rate: Off, 1/1, 1/2, 1/4, 1/8, 1/16.

**Data Patterns****Pattern Length per Channel (Pattern Memory) –**

Minimum:

DTG5078: 1 bit (software mode) or 240 bits (hardware mode).

DTG5274/5334: 1 bit (software mode) or 960 bits (hardware mode).

Maximum:

DTG5078: 8,000,000 bits.

DTG5274: 32,000,000 bits (in multiples of four).

DTG5334: 64,000,000 bits (in multiples of four).

**Built-in Data Patterns** – Binary Counter, Johnson Counter, Graycode Counter, Walking Ones, Walking Zeros, Checker Board, User-defined Patterns.**Pattern Import Capability –**

Type/Tools:

Tektronix TLA Data Exchange Format File (\*.txt).

Tektronix HFS Vector File (ASCII) (\*.vca).

Tektronix HFS Vector File (binary) (\*.vcb).

Tektronix AWG2000 Series (\*.wfm).

Tektronix AWG400s/500s/610/710/710B (\*.pat).

Tektronix DG2000 Series (\*.dat).

Medium/Pass:

Import data through GPIB, LAN, CD-ROM, floppy drive, USB memory devices.

**Pattern Copy and Paste Capability** – Copy, paste, and rotation between data listing/waveform editor and spreadsheet software (e.g. Excel) through the clipboard.**PRBS/PRWS Data Patterns** – (Note: Memory supports PRBS/PRWS patterns, and user can create errored PRBS)2<sup>5</sup>-1, 2<sup>6</sup>-1, 2<sup>7</sup>-1, 2<sup>8</sup>-1, 2<sup>9</sup>-1, 2<sup>10</sup>-1, 2<sup>11</sup>-1, 2<sup>12</sup>-1, 2<sup>13</sup>-1, 2<sup>14</sup>-1, 2<sup>15</sup>-1, 2<sup>23</sup>-1.**Sequencer Features****Sequence Length –**

1 to 8,000 steps for main sequence.

1 to 256 steps for subsequence.

**Max. Number of Blocks** – 8,000.**Max. Number of Subsequences** – 50.**Repeat Counter** – 1 to 65,536 or infinite.**Channel Addition** – AND or XOR (slots A to D only).**Note:** DTG5078 slots E, F, G, and H do not support the following: RZ, R1, pulse generation modes which includes controls for trail delay/duty cycle/pulse width, channel addition, and variable cross-points.**Auxiliary Channels****Clock Out****Connector** – Complementary output (common offset and ground).

DTG5078/5274: SMA rear panel.

DTG5334: SMA front panel.

**Frequency Range –**

DTG5078: 50 kHz to 750 MHz.

DTG5274: 50 kHz to 2.7 GHz.

DTG5334: : 50 kHz to 3.35 GHz, settable up to 3.4 GHz.

**Frequency Resolution –**

8 digit setting resolution

Minimum: 1 mHz (e.g. with 50 kHz setting).

**Internal Clock Accuracy** – within ±1 ppm.**Jitter –**DTG5078: <2 ps<sub>RMS</sub> at 750 Mb/s, at 0.8 V<sub>p-p</sub> (typical).DTG5274: <2 ps<sub>RMS</sub> at 2.7 Gb/s, at 0.8 V<sub>p-p</sub> (typical).DTG5334: <2 ps<sub>RMS</sub> at 3.35 Gb/s, at 0.8 V<sub>p-p</sub> (typical).**Amplitude/Resolution –**0.03 V<sub>p-p</sub> to 1.25 V<sub>p-p</sub> / 10 mV (50 Ω).0.06 V<sub>p-p</sub> to 2.5 V<sub>p-p</sub> / 10 mV (1 MΩ).**Output Voltage Window –**

-2.0 to 2.47 V (50 Ω).

-2.0 to 7.00 V (1 MΩ).

**Max. Output Current** – ±80 mA.**Transition Times (20% - 80%) –**

DTG5078:

<85 ps (Amplitude = 0.1 V<sub>p-p</sub>, Offset = 0 V) (typical).<100 ps (Amplitude = 1.0 V<sub>p-p</sub>, Offset = 0 V) (typical).

DTG5274:

<70 ps (Amplitude = 0.1 V<sub>p-p</sub>, Offset = 0 V) (typical).<80 ps (Amplitude = 1.0 V<sub>p-p</sub>, Offset = 0 V) (typical).

DTG5334:

<100 ps (Amplitude = 1.0 V<sub>p-p</sub>, Offset = 0 V) (typical).**Overshoot** – <10%, at High = 1.0 V, Low = 0 V into (50 Ω) (typical).**Other Output Channels****Auxiliary DC Outputs** – -3.0 to 5.0 V / 10 mV, Max. current: ±30 mA, 8 independently controlled outputs, Connector: 2 × 8 pin header on front panel.**Sync Out** – CML (current mode logic), VOH: 0 V, VOL: -0.4 V (50 Ω) (typical), SMA Connector, SE, Front panel, Rise/Fall Time (20 to 80%): 140 ps, Delay to Data Out: -4.5 ns (typical).**10 MHz Reference Out** – 1.2 V<sub>p-p</sub> (50 Ω, AC coupled) (typical), 2.4 V<sub>p-p</sub> (1 MΩ, AC coupled) (typical), BNC Connector, Rear Panel.

**Input Channels**

**External Clock In –**

Input Ranges:

DTG5078: 1 MHz to 750 MHz. SMA connector, rear panel.

DTG5274: 1 MHz to 2.7 GHz. SMA connector, rear panel.

DTG5334: 1 MHz to 3.35 GHz. SMA connector, front panel.

0.4 V<sub>p-p</sub> to 2 V<sub>p-p</sub> (50 Ω, AC Coupled), 50% ±5% duty cycle.

**10 MHz Reference In –**

Input Ranges:

10 MHz ±0.1 MHz, 0.2 V<sub>p-p</sub> to 3 V<sub>p-p</sub> (50 Ω, AC coupled), BNC connector, rear panel.

**Phase Lock In –**

Input Ranges:

1 MHz to 200 MHz, 0.2 V<sub>p-p</sub> to 3 V<sub>p-p</sub> (50 Ω, AC coupled), BNC connector, rear panel.

**Skew Cal In –** Single-ended, ECL (into 50 Ω to -2 V), SMA connector, front panel.

**Trigger In –**

Input Ranges:

-5 V to 5 V (50 Ω), 0.1 V resolution, -10 V to 10 V (1 kΩ), Min. 0.5 V<sub>p-p</sub> (50 Ω),

1.0 V<sub>p-p</sub> (1 kΩ), Min. 20 ns pulse width, Positive or Negative edge trigger, Delay

timing: see manuals, BNC connector, front panel.

**Event In –**

Input Ranges:

-5 V to 5 V (50 Ω), 0.1 V resolution, -10 V to 10 V (1 kΩ), 0.1 V resolution, Min.

0.5 V<sub>p-p</sub> (50 Ω), 1.0 V<sub>p-p</sub> (1 kΩ), Polarity: Normal or Invert, Delay timing: see manuals,

BNC connector, front panel.

**Instrument Control/Data Transfer Ports**

**GPIB –** GPIB for remote control and data transfer. (conforms to IEEE 488.1, compatible with IEEE 488.2 and SCPI-1999.0).

**LAN –** LAN for PC interface, remote control, and data transfer (conforms to IEEE 802.3).

**Computer System and Peripherals**

Compact PCI-based PC, Celeron 566 MHz CPU, Microsoft Windows 2000 Professional, 128 MB SDRAM, 20 GB Hard Drive, 1.44 MB floppy drive on front panel, CD-ROM in rear panel, included USB compact keyboard and mouse.

**PC I/O Ports**

USB 1.1 compliant ports (3 total, 1 front, 2 rear), PS/2 mouse and keyboard connectors (rear panel), RJ-45 Ethernet connector (rear panel) supports 10Base-T and 100Base-Tx, VGA Out (rear panel), RS-232C.

**Physical Characteristics**

Display Characteristics – LCD color display, 800 (H) × 600 (V) (SVGA).

<b>Mainframe Dimensions</b>	<b>mm</b>	<b>in.</b>
Height	266	10.5
Width	445	17.5
Length	462	19.7
<b>Output Module Dimensions</b>	<b>mm</b>	<b>in.</b>
Height	33	1.3
Width	84	3.3
Length	133	5.2
<b>Weight (approx.)</b>	<b>kg</b>	<b>lb.</b>
DTG5078	17.5	38.6
DTG5274	17.0	37.5
DTG5334	17.0	37.5
DTGM21	0.26	0.57
DTGM30	0.27	0.60
DTGM31	0.27	0.60
DTGM32	0.27	0.60

**Mechanical Cooling – Required Clearance**

**Top and Bottom –** 2 cm.

**Side –** 15 cm.

**Rear –** 7.5 cm.

**Power Supply**

**Power Source –** 100 to 240 VAC, 47 to 63 Hz.

**Power Consumption –** 560 W.

**Environmental**

<b>Characteristic</b>	<b>Operating</b>	<b>Nonoperating</b>
Temperature	+10 °C to +40 °C	-20 °C to +60 °C
Humidity	20% to 80% relative humidity with a maximum wet bulb temperature of 29.4 °C, noncondensing	(no diskette in floppy drive): 5% to 90% relative humidity with a maximum wet bulb temperature of 40 °C, noncondensing
Altitude	3,000 m (10,000 ft.)	12,000 m (40,000 ft.)
Random Vibration	2.65 m/s <sup>2</sup> RMS (0.27 G <sub>RMS</sub> ), from 5 Hz to 500 Hz, 10 minutes	22.36 m/s <sup>2</sup> RMS (2.28 G <sub>RMS</sub> ) total from 5 Hz to 500 Hz, 10 minutes each axis 3-axes. 30 minutes total

**Safety –**

UL61010B-1.

CAN/CSA-22.2 No. 1010.1.

EN61010-1/A2 1995.

**Electromagnetic Compatibility (EMC) –**

Europe:

EN61326 Class A.

EN61000-3-2, EN61000-3-3.

Australia / New Zealand:

AS/NZS 2064.

**Output Module Characteristics**

Basic Features	DTGM21	DTGM30	DTGM31	DTGM32
Output Channels and Connections	4 single-ended (installed in DTG5078) 2 single-ended (DTG5274/5334) 4 SMA connectors	2 complementary channels 4 SMA connectors	1 complementary channel 2 SMA connectors	
Maximum Data Rate (calculated by transition time)	1.1 Gb/s	3.35 Gb/s		350 Mb/s*2
Normal/ Complement (Invert)	Selectable			
Source Impedance	50 Ω / 23 Ω (selectable)	50 Ω		
Enable/Disable	Yes (software switch)			
<b>Output Channel Timing</b>				
Transition Times (20 - 80%) (50 Ω)	<340 ps (VOL = 0.0, VOH = 1.0) (typical) <1.0 ns (VOL = -1.65, VOH = 3.7) (typical)	<95 ps (VOL = 0.0, VOH = 0.1) (typical) <110 ps (VOL = 0.0, VOH = 1.0) (typical)		
Transition Time Control	No			
Slew Rate Control Range	-			
Setting Resolution	-			
<b>Channel Output Levels</b>				
Amplitude/Resolution	0.25 to 5.35 V <sub>p-p</sub> / 5 mV (from 23 Ω source impedance into 50 Ω) 0.25 to 3.9 V <sub>p-p</sub> / 5 mV (from 50 Ω source impedance into 50 Ω) 0.50 to 7.8 V <sub>p-p</sub> / 5 mV (from 50 Ω source impedance into 1 MΩ)	0.03 to 1.25 V <sub>p-p</sub> / 5 mV (into 50 Ω)*3 0.06 to 2.5 V <sub>p-p</sub> / 5 mV (into 1 MΩ)*3		
Output Voltage Window	-1.65 V to 3.70 V (from 23 Ω source impedance into 50 Ω) -1.2 V to 2.7 V (from 50 Ω source impedance into 50 Ω) -2.4 V to 5.4 V (from 50 Ω source impedance into 1 MΩ)	-2.0 V to 2.47 V (into 50 Ω) -2.0 V to 7.0 V (into 1 MΩ)		
DC Accuracy	(±3% of the set value) ±50 mV into 50 Ω to GND			
Limit setting	High- and low-level limits can be set			
Maximum Output Current	±80 mA			
Overshoot	<15% (typical) at High = 1.0 V, Low = 0 V		<10% (typical) at High = 1.0 V, Low = 0 V	
Typical Support Native Logic	TTL, CMOS, (P)ECL, LVPECL		LVDS, CMOS, (P)ECL, LVPECL, CML	
External Jitter Control	No		Yes	
External Jitter control input channels and connectors	-		1 single-ended channel 1 SMA connector	2 single-ended channels 2 SMA connectors
Input range	-		-0.5 V to +0.5 V (typical) Max input: -1.0 V to +1.0 V	-0.5 V to +0.5 V
Jitter Frequency	-		DC to 250 MHz *4	DC to 50 MHz
Jitter Amplitude	-		240 ps <sub>p-p</sub> for 1 V <sub>p-p</sub> input at Data rate ≤2.7 Gb/s*5	Range 1: Up to 1 ns at 1 V <sub>p-p</sub> Range 2: Up to 2 ns at 1 V <sub>p-p</sub>
External Tri-state (Hi Z) Control	Yes (SMB input connector)		No	
Tri-state Enable	Enable: Hi 3.3 V, Disable Lo: 0.0 V		-	
Control Channels	By output module level		-	
Delay Time from Inhibit In to Data Output	Active to Inhibit: 13 ns, Inhibit to Active: 12 ns		-	

\*2 Minimum pulse width &gt;2.86 ns.

\*3 Maximum output amplitude is dependent on output voltage window (offset). (See Figure 1.)

\*4 Up to 400 MHz by overdriving jitter input (max -1.0 V to +1.0 V<sub>p-p</sub>). (See Figure 2.)\*5 Jitter amplitude at data rates >2.7 Gb/s calculated as (240 - 61.5 × (data rate - 2.7)) ps<sub>p-p</sub> for 1 V<sub>p-p</sub> input (see Figure 3).

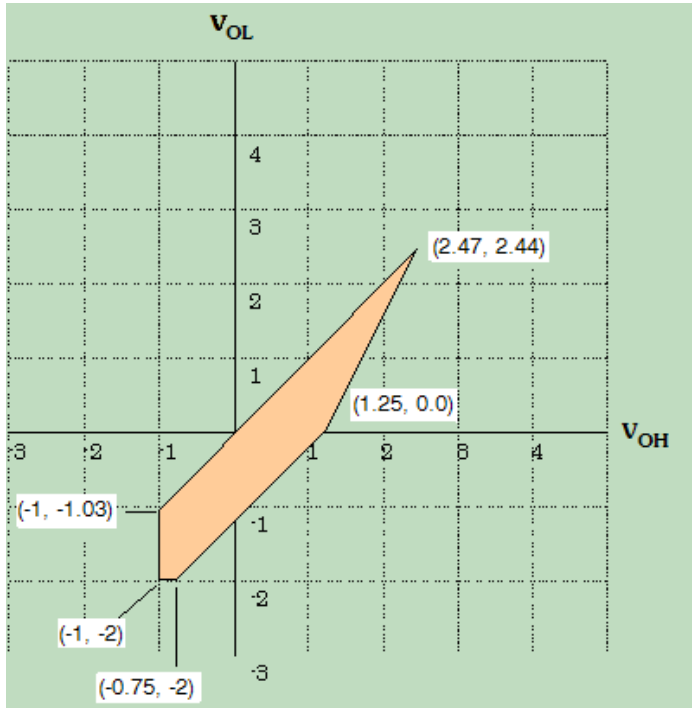


Figure 1. DTGM30, M31, M32 Output Amplitude vs. Offset

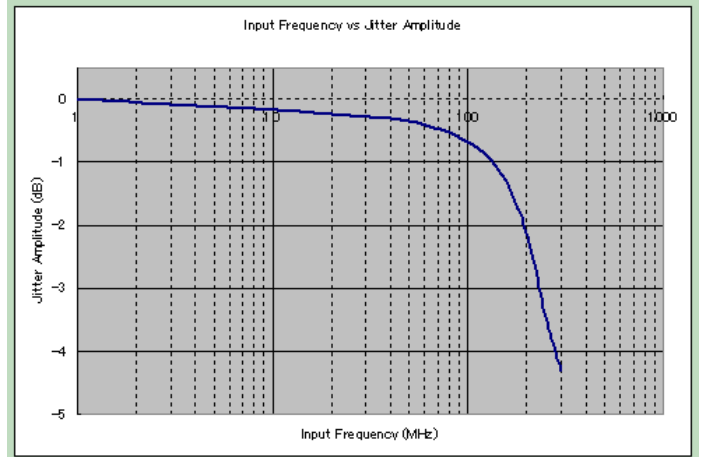


Figure 2. DTGM31 Jitter Input Frequency Response

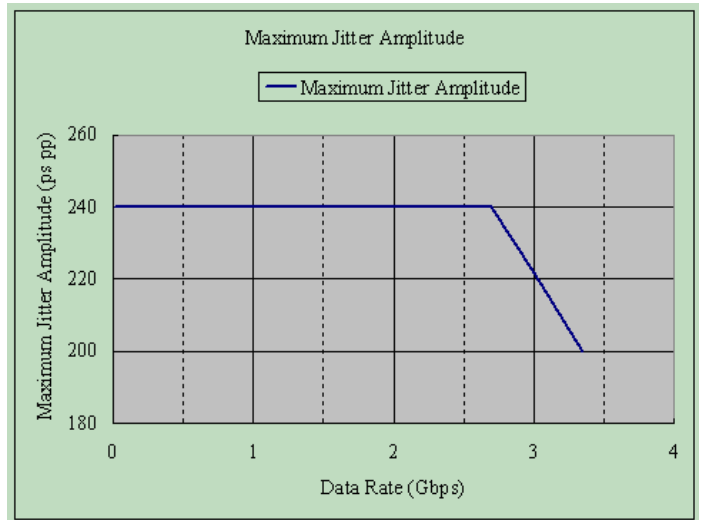


Figure 3. DTGM31 Maximum Jitter Amplitude vs. Data Rate



## Ordering Information

### Mainframes

#### DTG5078

750 Mb/s, 8-slot mainframe.

#### DTG5274

2.7 Gb/s, 4-slot mainframe.

#### DTG5334

3.35 Gb/s, 4-slot mainframe.

**Mainframes Include:** Microsoft Windows 2000 Professional operating system recovery disk, DTG5000 Series application software install disk, user manual (technical reference, registration card, accessory pouch, front cover, compact USB keyboard, USB mouse, lead set for DC Output, 16-CON, twisted pair, 24 in. (60 cm), 50  $\Omega$  SMA terminator (male, DC to 18 GHz), SMA connector cap (10 ea. with DTG5078, 8 ea. with DTG5274/5334), power cord, calibration certificate. Please specify power cord and language option when ordering.

### Mainframe Options

**Opt. 1R** – Rackmount.

### International Power Plugs

**Opt. A0** – North America power.

**Opt. A1** – Universal EURO power.

**Opt. A2** – United Kingdom power.

**Opt. A3** – Australia power.

**Opt. A5** – Switzerland power.

**Opt. A6** – Japan power.

**Opt. A10** – China power.

**Opt. A99** – No power cord or AC adapter.

### Language Options

**Opt. L0** – English.

**Opt. L5** – Japanese.

### Output Modules

#### DTGM21

4 channels (DTG5078), 2 channels (DTG5274/5334).

5.35  $V_{p-p}$  (from 23  $\Omega$  to 50  $\Omega$ ).

3.9  $V_{p-p}$  (50  $\Omega$ ), 7.8  $V_{p-p}$  (1 M $\Omega$ ).

Tr/Tf (20% to 80%) <340 ps (1  $V_{p-p}$ , into 50  $\Omega$ ), fixed.

External Tri-state (Hi\_Z) control function.

#### DTGM30

2 channels.

1.25  $V_{p-p}$  (50  $\Omega$ ), 2.5  $V_{p-p}$  (1 M $\Omega$ ).

Tr/Tf (20% to 80%) <110 ps (1  $V_{p-p}$ , into 50  $\Omega$ ), fixed.

#### DTGM31

1 channel.

1.25  $V_{p-p}$  (50  $\Omega$ ), 2.5  $V_{p-p}$  (1 M $\Omega$ ).

Tr/Tf (20% to 80%) <110 ps (1  $V_{p-p}$ , into 50  $\Omega$ ), fixed.

External jitter control input.

Jitter frequency DC – 250 MHz.

Jitter amplitude up to 240 ps.

#### DTGM32

1 channel.

1.25  $V_{p-p}$  (50  $\Omega$ ), 2.5  $V_{p-p}$  (1 M $\Omega$ ).

Tr/Tf (20% to 80%) <110 ps (1  $V_{p-p}$ , into 50  $\Omega$ ), fixed.

2 ch external jitter control input.

Jitter frequency DC – 50 MHz.

Jitter amplitude up to 1 ns / 2 ns.

**Output Modules Include:** Installation sheet (Japanese/English), SMA connector cap (set of 4 with DTGM21, set of 2 with DTGM30), 50  $\Omega$  SMA terminator (DC to 18 GHz) (set of 2 with DTGM30, set of 1 with DTGM31/32), registration card.

### Service Options

**Opt. C3** – Calibration Service 3 Years.

**Opt. C5** – Calibration Service 5 Years.

**Opt. D1** – Calibration Data Report (English).

**Opt. D3** – Calibration Data Report 3 Years (with Opt. C3).

**Opt. D5** – Calibration Data Report 5 Years (with Opt. C5).

**Opt. R3** – Repair Service 3 Years.

**Opt. R5** – Repair Service 5 Years.

### Service Upgrade Kit

To determine if your DTG5334 or DTGM30 requires a service upgrade to meet these specifications, please contact your local Tektronix sales representative or technical support (1-800-833-9200, select Option 3, or e-mail: [TechSupport@tektronix.com](mailto:TechSupport@tektronix.com)) or service support (1-800-833-9200, select Option 2). Opt. IFC is required.

#### DTG53UP

**Opt. 13** – Enable operation of up to 3.4 Gb/s, and total jitter <44 ps<sub>p-p</sub> up to 3.35 Gb/s, 800 mV<sub>p-p</sub> differential output with DTGM30, requires the order of Opt. IFC.

**Opt. IFC** – Service installation and calibration, required with Opt. 13.

#### DTGM30UP

**Opt. 13** – Enables total jitter <44 ps up to 3.35 Gb/s, 800mV<sub>p-p</sub> differential output with DTG5334, requires the order of Opt. IFC

**Opt. IFC** – Service Installation and Calibration, required with Opt. 13.

### Recommended Accessories

**Service Manual (English)** – Order 071-1285-xx.

### Test Adapters

**HDMI TPA-R Test Adapter Set** – HDMI TPA-R TDR (set of 2), HDMI TPA-R DI (differential), HDMI TPA-R SE (single-ended). Order 013-A012-50.

**HDMI TPA-P Test Adapter Set** – HDMI TPA-P TDR, HDMI TPA-P DI (differential), HDMI TPA-P SE (single-ended). Order 013-A013-50.

**DVI TPA-R Test Adapter Set** – DVI TPA-R TDR (set of 2), DVI TPA-R DI (differential), DVI TPA-R SE (single-ended). Order 013-A014-50.

**Note:** These adapters do not include clock recovery circuits.

**Cables**

Part Number	Type
012-A229-xx	Lead set for DC Output, 16-CON, twisted pair, 24 in (60 cm)
012-1505-xx	Pin header cable, 20 in. (51 cm)
012-1503-xx	Pin header SMB cable, 20 in. (51 cm)
012-0991-xx	GPIB Cable, double-shielded, 79 in (200 cm)
012-A230-xx	<b>Master/Slave Cable Set for connecting two Mainframes;</b> set of 4 SMA cables, 51 cm, 50 $\Omega$ (174-1427-xx), and set of 2 BNC cables, 46 cm (012-0076-xx)
012-A231-xx	<b>Master/Slave Cable Set for connecting three Mainframes;</b> set of 6 SMA cables, 51 cm, 50 $\Omega$ (174-1427-xx) and set of 3 BNC cables, 46 cm (012-0076-xx)

**BNC Cables 50  $\Omega$** 

012-0076-xx	18 in. (46 cm)
012-1342-xx	24 in. (61 cm)
012-0057-xx	42 in. (107 cm)
012-1256-xx	With shield, 98 in. (250 cm)

**SMA Cables 50  $\Omega$** 

174-1364-xx	12 in (30 cm)
174-1427-xx	20 in. (51 cm)
174-1341-xx	39 in. (100 cm)
174-1428-xx	60 in. (152 cm)

**Delay SMA Cables 50  $\Omega$** 

015-1019-xx	1 ns (male to female)
015-0560-xx	2 ns
015-1005-xx	2 ns (male to female)
015-0561-xx	5 ns
015-1006-xx	5 ns (male to female)

**Adapters and Connectors**

Part number	Type
015-0671-xx	SMB - BNC adapter
015-0554-xx	50 $\Omega$ SMA (male) - BNC (female) Adapter
015-0572-xx	50 $\Omega$ SMA (female) - BNC (male) Adapter
015-0369-xx	50 $\Omega$ N (male) - SMA (male) Adapter
015-0549-xx	50 $\Omega$ SMA Adapter (male - female), DC to 18 GHz, VSWR: 1.2
015-0553-xx	50 $\Omega$ SMA Adapter (slide on type female - male), DC to 18 GHz, VSWR: 1.05 + 0.002F (GHz)
015-1016-xx	50 $\Omega$ SMA T-Connector (male - female/female)
015-0565-xx	50 $\Omega$ SMA Divider (female/female/female), 6 dB, DC to 18 GHz, VSWR: 1.9



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.









**Contact Tektronix:**

**ASEAN / Australasia** (65) 6356 3900  
**Austria** 00800 2255 4835\*  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Canada** 1 800 833 9200  
**Central East Europe and the Baltics** +41 52 675 3777  
**Central Europe & Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France** 00800 2255 4835\*  
**Germany** 00800 2255 4835\*  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Italy** 00800 2255 4835\*  
**Japan** 81 (3) 6714 3010  
**Luxembourg** +41 52 675 3777  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** 001 800 8255 2835  
**Russia & CIS** +7 (495) 7484900  
**South Africa** +41 52 675 3777  
**Spain** 00800 2255 4835\*  
**Sweden** 00800 2255 4835\*  
**Switzerland** 00800 2255 4835\*  
**Taiwan** 886 (2) 2722 9622  
**United Kingdom & Ireland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com)



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

02 Oct 2011

86W-16679-7

