

Instructions  
for

**EDSYN<sup>INC</sup>®**

951SXe  
LONER®

Temperature Controlled Soldering Station



### Product Features


- Our newest soldering system featuring a portable compact, lightweight design with analog display
- Accurate linear temperature control dial
- New and modern illuminated design for better visibility and to better indicate power on/off
- F/C display
- Easy to maintain and calibrate with external calibration features
- Modular sponge tray
- Wide variety of soldering and SMT CROWN® tips available
- RoHS compliant
- ESD safe
- 18 month warranty

## Package Contents

- 951SXe** Temperature Controlled Soldering Station includes LT375 Tip
- PD528** Tool Pod
- SH235** Modular Sponge Tray with RS200 Round Cleaning Sponge
- WP556** WIGAPRY® Mini Screwdriver and Calibration Aid Tool



Front Right Side View

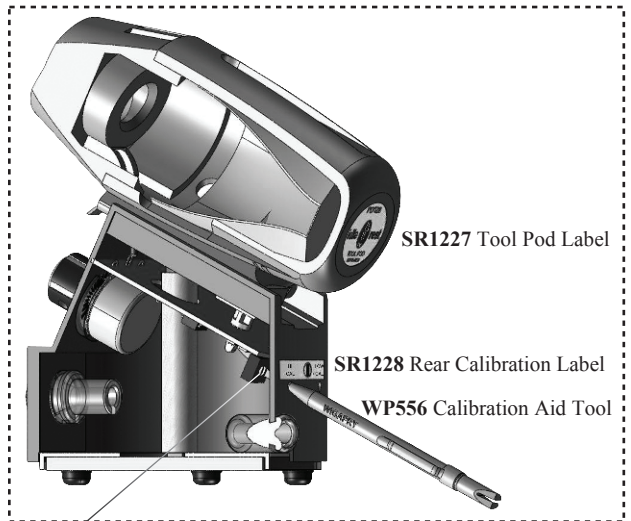

Rear Side Section View

**Warning:** Do not hit or tap the soldering tool. The ceramic heater element may break

## Tip Cleaning


To maintain proper Tip to Ground resistance

1. Remove Tip from Heater Assembly.
2. Using a **ST707** Solder Tool Maintenance Brush, clean Tip and Heater Barrel.
3. Install the tip and tighten **RS372\*** Retaining Sleeve. Take note of the gap to ensure proper fitting.



## Tip Care

1. Set desired temperature. Blinking Neon Lamp means Tool is ready.
2. TIN the Tip. (apply solder)
3. Do not rub, bend or reshape the Tip.
4. Always clean the Tip by wiping it against the moist **RS200** Sponge or **EA439** Dry Tip Cleaner and always RE-TIN with the **LT-1** Tip Tinner and Cleaner.

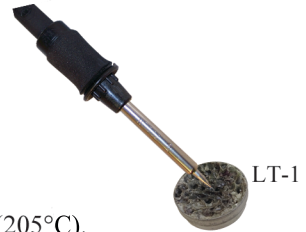

## Temperature Calibration

1. Turn on power and set Temperature Control Knob to 400°F (205°C).
2. Using a clean and well tinned Tip, apply a small amount of solder on the Tip, just enough to form a bead on top of the Tip.
3. Place the center of the thermocouple wire of the **SDS100** on top of the bead.
4. Again, apply a small amount of solder on the center of the thermo-couple wire, just enough to embed the center.
5. Adjust LO-Temp Calibration Pot so the Meter will read 400°F (205°C).
6. Set Temperature Control Knob to 800°F (427°C).
7. Adjust Hi-Temp Calibration Pot so the Meter will read 800°F (427°C).

## MS412

Digital Temperature Measurement System

For a quicker calibration for more than one station try using the **TP475** Temperature Probe













\* To avoid transferring debris back to your clean tip make sure you clean the **RS372** retaining sleeve with the **ST707** solder tool maintenance brush and replaces the **RS200** sponge frequently.


# Changing Tip

1. **IMPORTANT:** Make sure your tool is cool.
2. Turn Retaining Sleeve counter-clockwise to remove.
3. Remove old Soldering Tip.
4. Insert new Tip.
5. Install Retaining Sleeve. (should be “finger” tight only)

**WARNING:** Do not use the soldering tool if soldering tip is loose. This will cause the heater element to break.

<b>Soldering Tips</b>			
Iron Plated for long life-Nickel and Chrome Plated for optimum heat transfer Contact Edsyn for more tip selections		Width A	Length B
	<b>LT375</b> LONER Spade Soldering Tip	.06” (1.5mm)	.48” (12.2mm)
	<b>LT376</b> LONER Spade Soldering Tip	.12” (3.0mm)	.48” (12.2mm)
	<b>LT394</b> LONER Spade Soldering Tip	.07” (1.8mm)	.93” (23.6mm)
	<b>LT374</b> LONER Conical Soldering Tip	.03” (0.8mm)	.48” (12.2mm)
	<b>LT382</b> LONER Conical Soldering Tip	.02” (0.5mm)	.62” (15.8mm)
	<b>LT392LF</b> LONER Conical Soldering Tip	.01” (0.3mm)	1.13” (28.8mm)
	<b>LT429</b> LONER Conical Soldering Tip	.02” (0.5mm)	.74” (18.8mm)
	<b>LT446LF</b> LONER Conical Soldering Tip	.03” (0.8mm)	.48” (12.2mm)
	<b>LT337BC</b> LONER Heavy Duty Soldering Tip	.10” (2.5mm)	.74” (18.8mm)

## SET-UP REQUIRED FOR SPADE, CONICAL, AND HEAVY DUTY TIPS

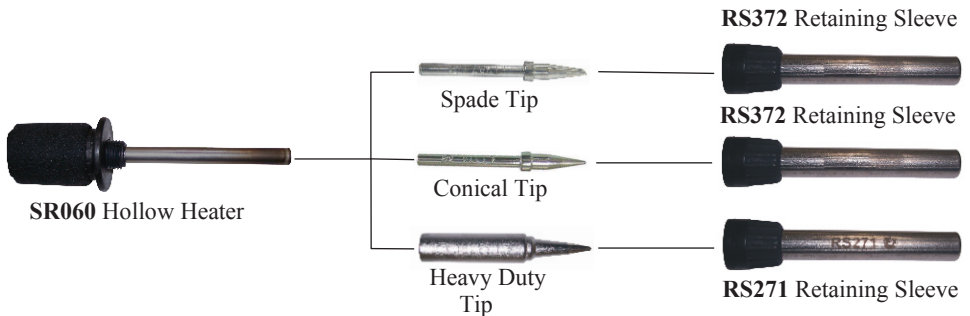

Apply AN112 Anti-Seize Compound or  
AN122 High Heat Anti-Seize Syringe Dispenser  
to Heater and area of Tip contact.


# 951SXe

## Exploded View

### Tool Pod Maintenance

#### Replace SC581 Solder Collector

1. Hold Thermal Housing (1A) firm and turn Front Housing (1C) counter-clockwise and pull it apart.
2. Remove used Solder Debris Collector (1B) and replace with a new one.
3. Reassemble (1A) to (1C) (for correct fit line up tabs to slots)

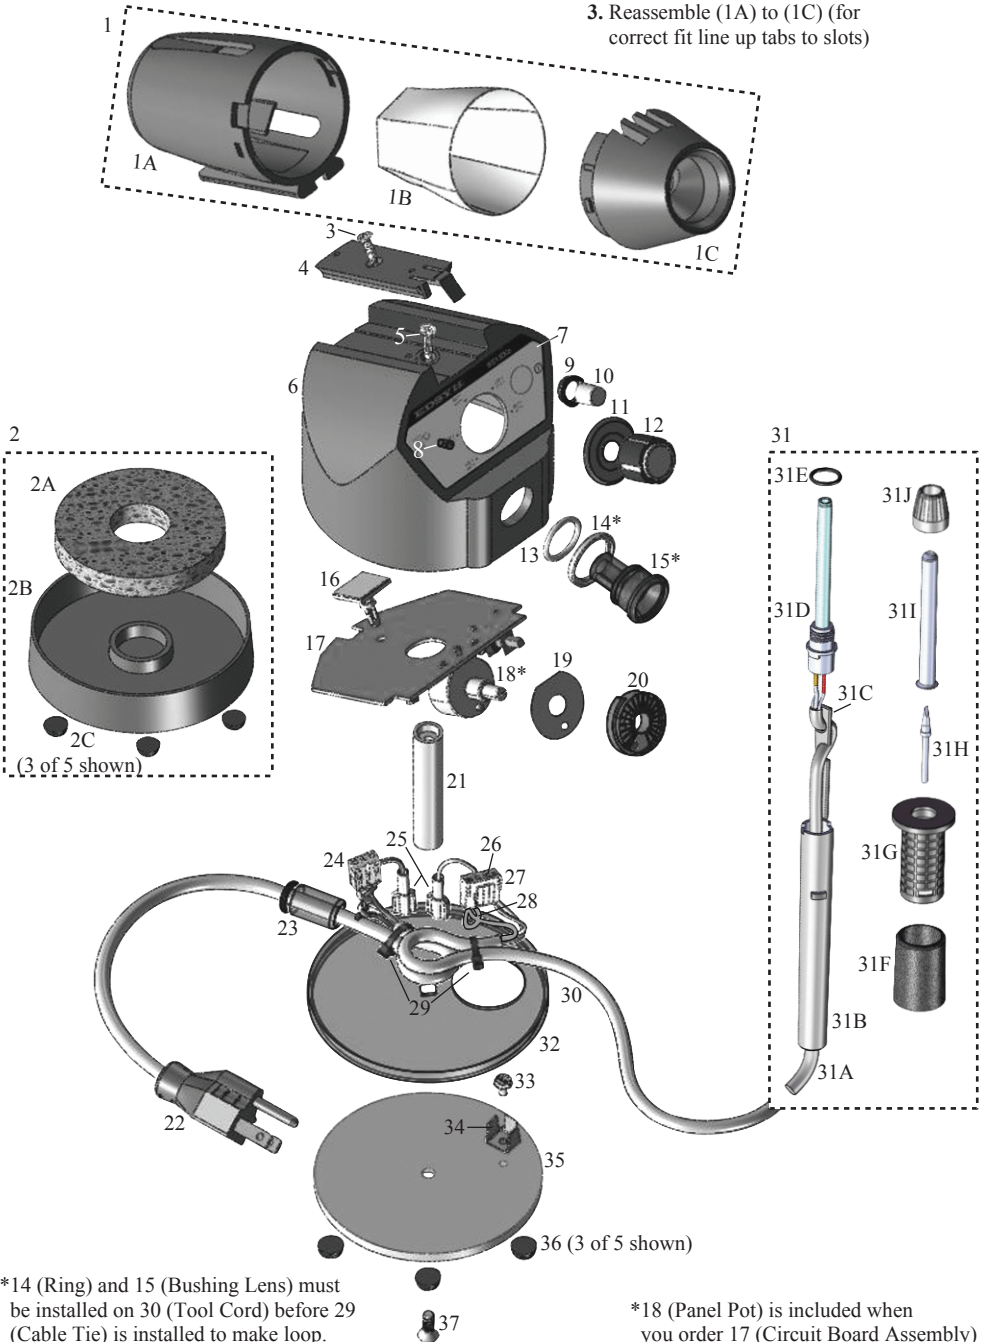

\*14 (Ring) and 15 (Bushing Lens) must be installed on 30 (Tool Cord) before 29 (Cable Tie) is installed to make loop.

\*18 (Panel Pot) is included when you order 17 (Circuit Board Assembly)

## 951SXe Spare Parts List

ITEM NO.	PART NO.	DESCRIPTION	QTY. NEEDED
1	<b>PD528</b>	Tool Pod (includes SC581)	1
1A	<b>SR042</b>	Thermal Housing for Tool Pod	1
1B	<b>SC581</b>	Solder Debris Collector	1
1C	<b>SR043</b>	Front Housing for Tool Pod	1
2	<b>SH235</b>	Modular Sponge Tray Holder (includes RS200 round cleaning sponge)	1
2A	<b>RS200</b>	Round Cleaning Sponge	1
2B	<b>SR1225</b>	Sponge Tray	1
2C	<b>SR251</b>	Rubber Feet (Set of 4)	1.25 set
3	<b>SR367</b>	Phillips Flat Head Screw	1
4	<b>SR784</b>	Single Dovetail Track	1
5	<b>SR772</b>	Phillips Flat Head Screw	1
6	<b>SR1200</b>	Housing for Soldering Station	1
7	<b>SR1201</b>	Front Panel Label	1
8	<b>SR1226</b>	Front Panel Mount Light Pipe	1
9	<b>SR1202</b>	Switch Button Lens Ring	1
10	<b>SR1203</b>	Round Chrome Switch Cap	1
11	<b>SR1205</b>	Dial Face Lens Cover	1
12	<b>SR1204</b>	Black Control Knob	1
13	<b>SR1208</b>	Silicone O-Ring	1
14	<b>SR1207</b>	Ring for Tool Cord Bushing Lens	1
15	<b>SR1206</b>	Tool Cord Bushing Lens	1
16	<b>SR1224</b>	Locking PCB Support	1
17	<b>SR1223</b>	Circuit Board Assembly	1
18*	<b>SR1211</b>	5K Wire-Wound Panel Pot	1
19	<b>SR1210</b>	Background Washer for Dial Face	1
20	<b>SR1209</b>	Dial Face Lens	1
21	<b>SR1212</b>	Base Post Enclosure	1

\* Included when ordering circuit board assembly

**951SXe  
Spare Parts List Con.**

ITEM NO.	PART NO.	DESCRIPTION	QTY NEEDED
22	<b>SR1221</b>	Power Cord Assembly	1
23	<b>SR1222</b>	Power Cord Bushing Lens	1
24	<b>SR432</b>	3 Circuit Housing Connector (Set of 3)	.3 set
25	<b>SR495</b>	Female Fully Insulated Connector (Set of 5)	.4 set
26	<b>SR415</b>	Terminal Crimp (Set of 10)	.3 set
27	<b>SR1213</b>	Insulated Display Housing Connector	1
28	<b>SR445</b>	Black Wire	.16ft
29	<b>SR1214</b>	Cable Tie	2
30	<b>SR059</b>	Tool Cord	1
31*	<b>SR1215</b>	Hollow Heater Soldering Tool, Complete Assembly	1
31A	<b>SR525</b>	Static-Safe Silicone Black Hose	.43ft
31B	<b>SR057</b>	Handle	1
31C	<b>SR1229</b>	Strain Relief	1
31D	<b>SR060</b>	Hollow Heater Assembly Kit (includes SR062, SR064, and Shrink Sleeving)	1
31E	<b>SR062</b>	O-Ring	1
31F	<b>SR063</b>	Vinyl Sleeve	1
31G	<b>SR064</b>	Snap-on Collar	1
31H	<b>LT375</b>	LONER Spade Soldering Tip	1
31I	<b>RS382</b>	Retaining Sleeve	1
31J	<b>RB386</b>	Retaining Bushing	1
32	<b>SR1216</b>	Clear Lens Base Cover	1
33	<b>SR1217</b>	Hex Screw	1
34	<b>SR1220</b>	3 Terminal Ground Lug	1
35	<b>SR1218</b>	Metal Base	1
36	<b>SR251</b>	Rubber Feet (Set of 4)	1.25 set
37	<b>SR1219</b>	Flat Head Screw	1

\* Also included are items 30,29,28,27,26,15,14, and 13.

## Specifications

<b>Power Requirements</b>	120V, 60Hz
<b>Power Rating</b>	15W - 220W
<b>Heater Rating</b>	120V, 95W
<b>Temperature Range</b>	400°F-800°F/205°C-427°C
<b>Temperature Regulations</b>	±6°F/±3°C
<b>Tip-to-Ground Voltage</b>	
<b>Leakage/Resistance</b>	< 2mV/< 2 ohms
<b>Overall Dimension</b>	4.11" W x 6½" H x 4" D 104 mm x 166mm x 102 mm
<b>Weight</b>	2.12bs (.96 kg)

## Warranty

---

Edsyn stands behind its products. We warranty that new tools will be free from defects for 18 months from the date of purchase. During this time period Edsyn will repair or, at its option, replace the tool at no charge. This warranty does not include tips and accessories. Any tool that appears to have been deliberately abused, altered, or destroyed is not covered by this warranty.

## Technical Support

---

Contact our Customer Service for assistance related to the purchase of this product or recommendations on a challenge that you may encounter. There are many replacement parts that are available to keep your tool in top condition. To speak to someone in Customer Service, call 818-989-2324.

©Copyright 2013 by EDSYN®, Inc. All Rights Reserved

No part of this publication, including individual icons, may be reproduced or utilized in any form or by any means without the written permission of EDSYN®, Inc.



Designed Patented & Assembled in U.S.A.



Design, color, weight, and material subject to change without notice. Components from other designs may be used with information pertaining to it, but not applicable to another use.

Labels and instructions will supersede this information.



Phone: 818-989-2324 • FAX: 818-997-0895

Email: [info@edsyn.com](mailto:info@edsyn.com) • Internet: [www.edsyn.com](http://www.edsyn.com)

Address: 15958 Arminta St, Van Nuys, CA 91406

Form. 951SXe