

6

5


4

3


2

1


FRONT VIEW - FEMALE INSERT

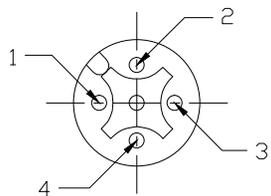

- 1 - RED
- 2 - RED/WHITE
- 3 - RED/BLACK
- 4 - GREEN



∅0.68 REF.

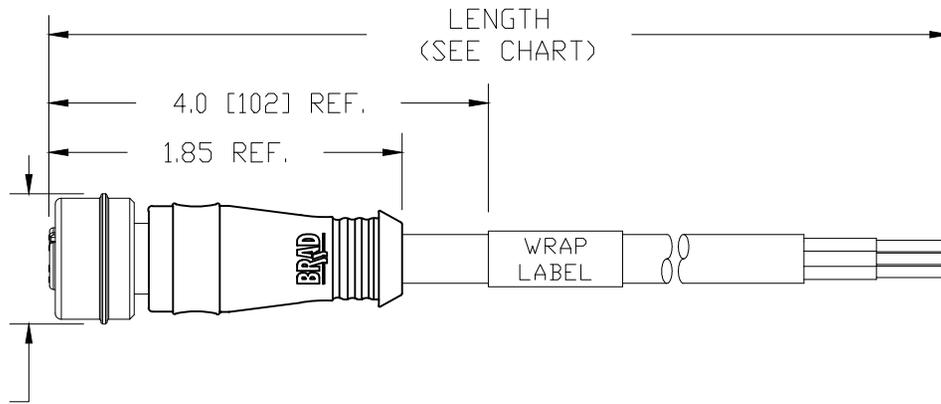

NOTES:

MATERIALS:
 CONTACTS: COPPER ALLOY, GOLD/NICKEL PLATING
 CONTACT CARRIER: NYLON, BLACK
 MOLDED BODY: PVC, YELLOW
 COUPLER: 316 STAINLESS STEEL
 INTERFACE O-RING: EPDM

ELECTRICAL:
 CURRENT RATING: 4AMP MAX
 VOLTAGE RATING: 250V

MECHANICAL:
 TEMPERATURE: -20° TO 80°C
 INGRESS PROTECTION: IP69K

CABLE SPECIFICATIONS:
 CABLE JACKET: PVC, YELLOW
 CONDUCTORS: #18/4, PVC

PART NUMBER	ENGINEERING NO.	LENGTH
1200790307	W04000A03M0208	6.56' +3.50" -0 [2.0M +89mm -0]

CUSTOMER PRODUCTION APPROVAL
 APPROVED BY: _____
 DATE: _____
 MUST BE SIGNED AND RETURNED BEFORE
 PRODUCTION WILL BEGIN.

RESTRICTED SALES DRAWING

CORRECT COLOR CODE EC NO: WEU2010-0539 DRWN: LHARTMAN 5/7/10 CHKD: TWOLDEGE APPR: JFMURPHY 2010/03/29	QUALITY SYMBOLS	DESCRIPTION
	$\nabla=0$ $\sphericalangle=0$	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	DIMENSION STYLE INCH ONLY
	SCALE 2:1 DESIGN UNITS INCH
	THIRD ANGLE PROJECTION
4 PLACES	mm INCH
3 PLACES	±--- ±---
2 PLACES	±--- ±.005
1 PLACE	±--- ±.010
	±--- ±.020
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DRAWN BY DATE	LHARTMAN 2010/03/16
CHECKED BY DATE	TWOLDEGE 2010/03/17
APPROVED BY DATE	JFMURPHY 2010/03/29
MATERIAL NO.	SEE TABLE
SIZE	A

TITLE	MICRO CHANGE ULTRA LOCK 4-POLE FEMALE STRAIGHT #18/4 YELLOW PVC CABLE
MOLEX INCORPORATED	
DOCUMENT NO.	SD-120079-044
SHEET NO.	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

6

5

4

3

2

1