

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0019092129

Status:


Active

Overview:

Standard .093" Pin and Socket Connectors

Description:

2.36mm Diameter Standard .093" Pin and Socket Plug Housing with Positive Latch, UL 94V-2, without Panel Mount, 12 Circuits

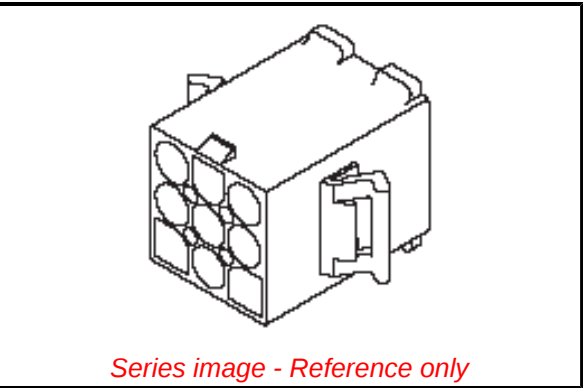

Documents:	
3D Model	Packaging Specification 31910002-PK-000 (PDF)
Drawing (PDF)	Packaging Specification PK-3191-001-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-3191-001-001 (PDF)	

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Crimp Housings
Series	3191
Application	Power, Wire-to-Wire
Comments	Polarized to Mating Part
Overview	Standard .093" Pin and Socket Connectors
Product Name	Standard .093"
Taxonomy	Connector Housings
UPC	800753690264
Physical	
Circuits (maximum)	12
Circuits Detail	3x4
Color - Resin	Natural
Flammability	94V-2
Gender	Plug
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Net Weight	11.825/g
Number of Rows	3
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	6.70mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C
Electrical	
Current - Maximum per Contact	7.0A
Material Info	
Engineering Number	3191-12P1
Reference - Drawing Numbers	
Packaging Specification	31910002-PK-000, PK-3191-001-001
Product Specification	PS-3191-001-001
Sales Drawing	31911200-SD-000

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

3191 Series

Mates With

19091126 , 19091129 , 5219

Use With

Standard .093" Female Crimp Terminals 1189 , 1381 , 1433 , 4550 . Standard .093" Male Crimp Terminals 1190 , 1380 , 1434 , 1973 , 42138

This document was generated on 08/30/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION