


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0022232061](#)
Status: **Active**
Overview: [KK Interconnect Solutions](#)
Description: KK 254 Solid Header, Vertical, with Friction Lock, 6 Circuits, Tin (Sn) Plating

Documents:

3D Model	Packaging Specification PK-6373-001-000 (PDF)
3D Model (PDF)	Symbol Footprint Data SYM-22-23-2061-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-10-07-001 (PDF)	

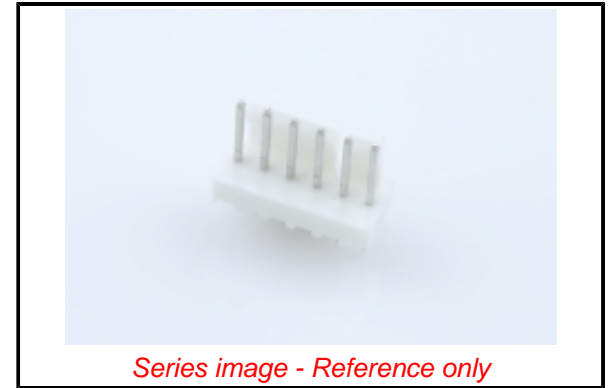

Series image - Reference only

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	6373
Application	Signal, Wire-to-Board
Overview	KK Interconnect Solutions
Product Name	KK 254
Taxonomy	PCB Headers and Receptacles
UPC	800753589728

Physical

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural (White)
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Resin	Nylon
Net Weight	0.692/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.56mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Partial
Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	4.0A
-------------------------------	------

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[6373 Series](#)

Mates With

[2695](#) , [6471](#) , [7880](#) , [4455](#) , [7720](#)

Voltage - Maximum 500V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005

Lead-free Process Capability WAVE

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 235

Material Info

Engineering Number A-6373-06A222

Reference - Drawing Numbers

Packaging Specification PK-6373-001-000

Product Specification PS-10-07-001

Sales Drawing SD-6373-001-000, SD-6373-001-002

Symbol/Footprint Data SYM-22-23-2061-001

This document was generated on 09/29/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION