

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0022284088](#)  
**Status:** **Active**  
**Overview:** [KK Interconnect Systems](#)  
**Description:** KK 254 Breakaway Header, Vertical, 8 Circuits, 0.76µm Gold (Au) Selective Plating, Mating Pin Length 7.49mm

**Documents:**

|                                |   |
|--------------------------------|---|
| <a href="#">3D Model</a>       | <a href="#">Product Specification PS-10-07-001 (PDF)</a>        |
| <a href="#">Drawing (PDF)</a>  | <a href="#">Packaging Specification PK-40873-0041-001 (PDF)</a> |
| <a href="#">3D Model (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>            |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**


|                |   |
|----------------|---|
| Product Family | PCB Headers                             |
| Series         | <a href="#">42375</a>                   |
| Application    | Board-to-Board, Signal, Wire-to-Board   |
| Overview       | <a href="#">KK Interconnect Systems</a> |
| Product Name   | KK 254                                  |
| Taxonomy       | PCB Headers and Receptacles             |
| UPC            | 800753828315                            |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | Yes                            |
| Circuits (Loaded)              | 8                              |
| Circuits (maximum)             | 8                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 100                            |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | None                           |
| Material - Plating Mating      | Gold                           |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 0.547/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Vertical                       |
| PC Tail Length                 | 3.05mm                         |
| PCB Locator                    | No                             |
| PCB Retention                  | None                           |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Bag                            |
| Pitch - Mating Interface       | 2.54mm                         |
| Polarized to Mating Part       | No                             |
| Polarized to PCB               | No                             |
| Shrouded                       | No                             |
| Stackable                      | No                             |
| Surface Mount Compatible (SMC) | Yes                            |
| Temperature Range - Operating  | See Product Specification      |
| Termination Interface: Style   | Through Hole                   |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 4.0A |
|-------------------------------|------|

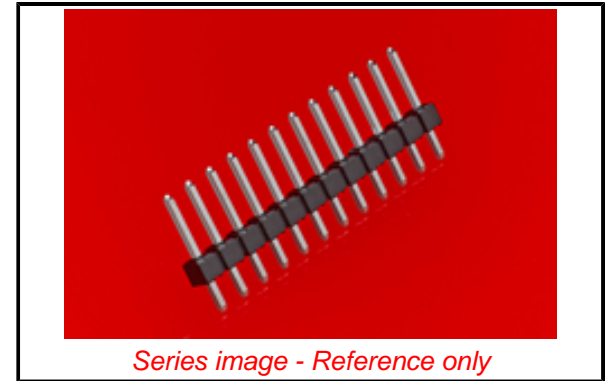

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[42375](#) Series

**Mates With**

KK 254 Crimp Housing [2695](#) , [7880](#) . KK 254  
Top-Entry PCB Receptacle [4455](#) . C-Grid  
Shunt Terminal Housing [7859](#)

Voltage - Maximum 500V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 005

Lead-free Process Capability WAVE

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 260

**Material Info**

Engineering Number 42375-0288

**Reference - Drawing Numbers**

Packaging Specification PK-40873-0041-001

Product Specification PS-10-07-001

Sales Drawing SD-42375-001-001, SD-42375-001-002

This document was generated on 10/10/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**