

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0026485023](#)  
**Status:** **Active**  
**Overview:** [KK Interconnect Solutions](#)  
**Description:** KK 396 Breakaway Header, Vertical, 2 Circuits, 0.50µm (20µ") Gold (Au) Overall Plating, Pin length 25.40mm (.1.000")

**Documents:**

[Drawing \(PDF\)](#) [Symbol Footprint Data SYM-26-48-1021-001 \(PDF\)](#)  
[Product Specification PS-08-50-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Packaging Specification PK-41661-001-001 \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**Application tooling part link**


Application Tooling Part Link 11-20-0901

**General**

Product Family PCB Headers  
 Series [41661](#)  
 Application Board-to-Board, Signal, Wire-to-Board  
 Overview [KK Interconnect Solutions](#)  
 Product Name KK 396  
 Taxonomy PCB Headers and Receptacles  
 UPC 800754905794

**Physical**

Breakaway Yes  
 Circuits (Loaded) 2  
 Circuits (maximum) 2  
 Color - Resin Black  
 Durability (mating cycles max) 25  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part None  
 Material - Metal Brass  
 Material - Plating Mating Gold  
 Material - Plating Termination Matte Tin  
 Material - Resin Polyester  
 Net Weight 0.699/g  
 Number of Rows 1  
 Orientation Vertical  
 PC Tail Length 3.89mm  
 PCB Locator No  
 PCB Retention None  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Bag  
 Pitch - Mating Interface 3.96mm  
 Pitch - Termination Interface 3.96mm  
 Polarized to Mating Part No  
 Polarized to PCB No  
 Shrouded No  
 Stackable Yes

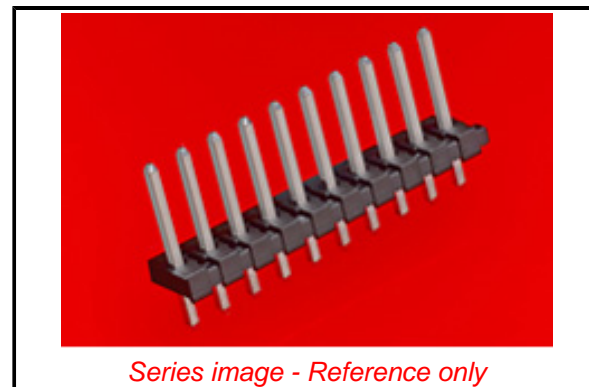

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
 D(2022)4187-DC (10  
 June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[41661](#) Series

**Mates With**

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

Surface Mount Compatible (SMC)	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	4.5A
Voltage - Maximum	250V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

**Material Info**

Engineering Number	A-41661-A02D241
--------------------	-----------------

**Reference - Drawing Numbers**

Packaging Specification	PK-41661-001-001
Product Specification	PS-08-50-001
Sales Drawing	SD-41661-001-001, SD-41661-001-002
Symbol/Footprint Data	SYM-26-48-1021-001

This document was generated on 09/27/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**