


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0347073021](#)

**Status:** **Active**

**Overview:** [Stac64 Single, Multi-Pocket and Hybrid Header System](#)

**Description:** Stac64 3 Bay Vertical Headers, 50 Circuits, Bay A 10 Circuit Power Header, Polarization A, Black; Bay B 20 Circuit Signal, Polarization C, Brown; Bay C 20 Circuits Polarization D, Green, Tray

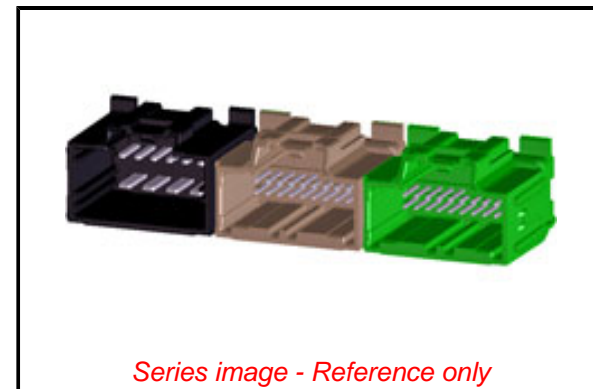

*Series image - Reference only*

**Documents:**

- |  |  |
|--|--|
| <a href="#">3D Model</a>                                     | <a href="#">Application Specification AS-34729-020-001 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                               | <a href="#">Brochure (PDF)</a>                                   |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |
| <a href="#">Product Specification PS-31372-100-001 (PDF)</a> |  |

**General**

Product Family	PCB Headers
Series	<a href="#">34707</a>
Application	Automotive, Power, Wire-to-Board
Comments	Bay A 10 Circuits Stac64 Vertical Power Header, Polarization A. Bay B 20 Circuits Stac64 Vertical Signal Header, Polarization C. Bay C 20 Circuits Stac64 Vertical Signal Header, Polarization D
Overview	<a href="#">Stac64 Single, Multi-Pocket and Hybrid Header System</a>
Product Name	Stac64
UPC	884982008434

**Physical**

Breakaway	No
Circuits (Loaded)	50
Circuits (maximum)	50
Color - Resin	Black, Brown, Green
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	23.662/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.36mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.30mm, 2.54mm, 3.50mm, 5.25mm
Pitch - Termination Interface	2.30mm, 2.54mm, 3.50mm, 5.25mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Through Hole

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Contained Per - D(2022)4187-DC (10 June 2022)

Boric acid

**Halogen-Free**

**Status**

**Not Relevant**

For more information, please visit [Contact US](#)

China ROHS

Not Relevant

ELV

Compliant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[34707 Series](#)

**Mates With**

[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptacle Assembly, [34729](#) 2.54mm (.100") Pitch Stac64 Right Angle Receptacle

**Electrical**

Current - Maximum per Contact	Contact Molex
Voltage - Maximum	500V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-34729-020-001
Product Specification	PS-31372-100-001
Sales Drawing	SD-34707-300-001

This document was generated on 07/12/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**