

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0441500008

Status:

Active

Overview:

Magnetic and Modular Jacks/Plugs

Description:

Modular Jack, Right-Angle, Low Profile, 8/8, 8 Ports

Documents:

3D Model

Packaging Specification PK-44150-004-000 (PDF)

Drawing (PDF)

Test Summary TS-44050-001-001 (PDF)

3D Model (PDF)


RoHS Certificate of Compliance (PDF)

Product Specification PS-44050-003-001 (PDF)

Agency Certification		
CSA		LR19980
UL		E107635
General		
Product Family		Modular Jacks/Plugs
Series		44150
Comments		External Shield
Component Type		PCB Jack
Magnetic		No
Overview		Magnetic and Modular Jacks/Plugs
Performance Category		5, 5e
Power over Ethernet (PoE)		N/A
Product Name		Modular Jack 8/8, RJ45
Taxonomy		Modular Jacks and Plugs
UPC		800754812856

Physical		
Color - Resin		Black
Durability (mating cycles max)		500
Flammability		94V-0
Inverted / Top Latch		No
Jack Height		13.31mm
Lightpipes/LEDs		None
Material - Metal		Phosphor Bronze
Material - Plating Mating		Gold
Material - Plating Termination		Tin
Material - Resin		Nylon
Net Weight		32.560/g
Orientation		Right Angle (Side Entry)
PCB Retention		Yes
PCB Thickness - Recommended		1.57mm
Packaging Type		Tray
Pitch - Mating Interface		1.02mm
Pitch - Termination Interface		1.27mm
Plating min - Mating		1.270µm
Plating min - Termination		2.540µm
Port Configuration		1x8
Positions / Loaded Contacts		8/8
Temperature Range - Operating		-40° to +85°C
Termination Interface: Style		Through Hole
Wire/Cable Type		N/A

Electrical		
Current - Maximum per Contact		1.5A
Shielded		Yes

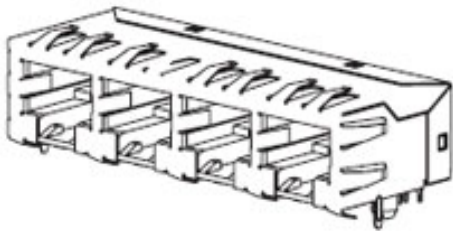

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Reviewed	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

44150 Series

Mates With

FCC 68 Plugs

Voltage - Maximum	150V AC (RMS)
Solder Process Data	
Lead-freeProcess Capability	WAVE
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-44150-004-000
Product Specification	PS-44050-003-001
Sales Drawing	SD-44150-002-001
Test Summary	TS-44050-001-001

This document was generated on 10/10/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION