

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0782940001**  
**Status:** **Active**  
**Overview:** DDR3 DIMM Sockets  
**Description:** 1.00mm Pitch DDR3 DIMM Socket, Vertical, Press-Fit, with Pegs, Black Housing and Latches, 0.76µm Gold (Au) Plating, 3.30mm Compliant Pin Length, 3.60mm PCB Thickness, 240 Circuits, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-78294-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-78294-001-001 (PDF)</a>
<a href="#">Product Specification PS-78294-002-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA	LR19980
UL	E29179

**Application tooling part link**

Application Tooling Part Link	62201-8656
Application Tooling Part Link	62202-3800

**General**


Product Family	Memory Module Sockets
Series	<u>78294</u>
Component Type	Socket
JEDEC Outline	MO-269
Overview	<u>DDR3 DIMM Sockets</u>
Product Name	DDR3 DIMM
Taxonomy	Memory Module Connectors
UPC	756054934616

**Physical**

Circuits (Loaded)	240
Circuits (maximum)	240
Durability (mating cycles max)	25
Entry Angle	Vertical
Flammability	94V-0
Housing Color	Black
Keying to Mating Part	Yes
Latch Color	Black
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	10.700/g
PC Tail Length	3.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	3.60mm
Packaging Type	Tray
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.762µm
Plating min - Termination	0.381µm
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

**Electrical**

Current - Maximum per Contact	1.0A
-------------------------------	------

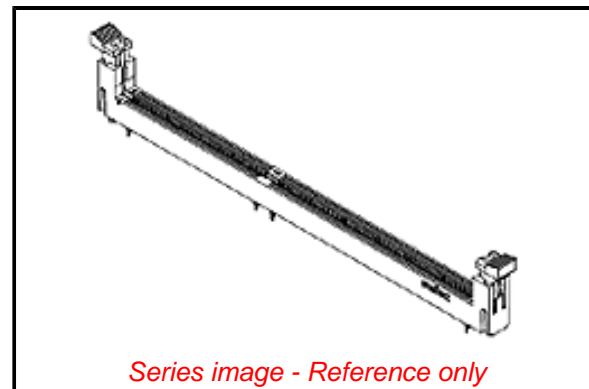

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[78294 Series](#)

**Mates With**

JEDEC Standard 1.27mm Modules

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

DDR3 DIMM

[622023800](#)

Memory Module

Extraction Tool

Voltage - Maximum 30V AC (RMS)/DC  
Voltage Key Center

**Solder Process Data**

Lead-free Process Capability N/A

**Material Info**

**Reference - Drawing Numbers**

Application Specification AS-78294-001-001  
Electrical Model Document EE-78294-001-001, EE-78294-002-001  
Packaging Specification PK-78294-001-001  
Product Specification PS-78294-002-001  
S-Parameter Model SP-78294-002-001  
Sales Drawing SD-78294-001-001

This document was generated on 08/26/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**