

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0901200780

Status:


Active

Overview:

C-Grid III Interconnects

Description:

2.54mm Pitch C-Grid III Header, Single Row, Vertical, 20 Circuits, 0.38µm Gold (Au)
Selective Plating

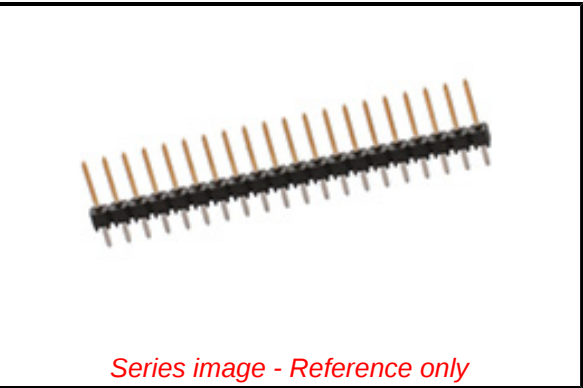

Documents:	
3D Model (PDF)	Application Specification 901190001-AS-000 (PDF)
3D Model	Packaging Specification PK-90120-100-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-99020-0001-001 (PDF)	

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	90120
Application	Signal, Wire-to-Board
Overview	C-Grid III Interconnects
Product Name	C-Grid III
Taxonomy	PCB Headers and Receptacles
UPC	800753715608
Physical	
Breakaway	Yes
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Nickel
Material - Resin	Polyester
Net Weight	1.150/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.381µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

90120 Series

Mates With

C-Grid III Vertical PCB Receptacle [90147](#)
. C-Grid III Right-Angle PCB Receptacle [90148](#) . C-Grid III Modular Crimp Housing [90123](#)

Temperature Range - Operating	-55° to +125°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	350V AC/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Application Specification	901190001-AS-000
Packaging Specification	PK-90120-100-001
Product Specification	PS-99020-0001-001
Sales Drawing	SD-90120-001-001

This document was generated on 09/02/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION