

MEGOHMMETERS

5000V GRAPHICAL

MODEL 5070

Offers real-time graphic plot of measurements and digital presentation of test results

SPECIFICATIONS

MODEL	5070	
INSULATION TESTS		
Test Voltage	500V 1000V 2500V 5000V	10kΩ to 2000GΩ (2TΩ) 10kΩ to 4000GΩ (4TΩ) 10kΩ to 10,000GΩ (10TΩ) 10kΩ to 10,000GΩ (10TΩ)
User Selectable Test Voltage		Programmable: 40 to 1000V: 10V increments; 1000 to 5100V: 100V increments
Automatic Step Voltage		Programmable step voltage and duration up to five steps. Three profiles can be stored.
Accuracy	10kΩ to 99.9GΩ 400GΩ to 10TΩ	±5% of Reading ±3cts ±15% of Reading ±10cts
Voltage Test/Safety Check		2500VAC/4000Vdc
Voltage Warning Indicator		Yes >25V
Test Inhibition		Yes — selectable at 3, 10 or 20% of test voltage
Smooth Function (user selectable)		Digital filtering stabilizes display readings
COMMUNICATION		
Storage of Readings Over Time R(t)		128kB memory
Storage of Test Results		Stores over 1500 test results
Communication Port		Serial and RS-232 to USB adapter (included)
PC Software/Report Generation		DataView® (included)
ELECTRICAL		
Power Source		One 9.6V NiMH battery pack (included) Line power: 85 to 256V (50/60Hz)
SAFETY		
Safety Rating/IP Protection		EN 61010-1, 1000V CAT III / IP53




DataView®



FEATURES

- True Megohmmeter®
- Test voltage selections of 500V, 1000V, 2500V and 5000V
- Insulation measurements from 10kΩ to 10,000GΩ (10TΩ)
- Selectable and programmable test voltage (40 to 5100V)
- Automatic calculation of DAR, PI and DD ratios
- Calculations of Step Voltage through front panel
- Direct measurement and display of capacitance and leakage current
- Display resistance, test voltage and run time
- Programmable test run times and PI ratio times
- Smooth and Alarm functions
- Automatic test inhibition (if live sample >3%, 10%, or 20% of test voltage)
- Automatic discharge and display of discharge voltage
- Graphic and digital display of test voltage, resistance and more
- Bright blue electroluminescent backlight
- Programmable temperature compensation
- Programmable test voltage lock-out
- Programmable alarm setting
- Auto Power OFF when not in use
- AC or DC powered with rechargeable NiMH battery pack - run while charging
- Rugged, water-resistant field case
- Includes DataView® software for data retrieval, real-time display, analysis and report generation

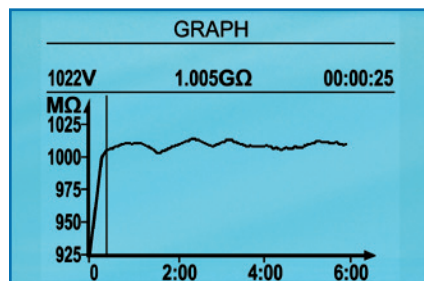

With the push of a button: Insulation Resistance measurement is graphically displayed at the completion of the test.

ACCESSORIES/REPLACEMENTS

CATALOG #2133.73

Extra Large Classic Tool Bag (18x9x12")

CATALOG #2119.45

PC RS-232, DB9 F/F 6 ft Null Modem Cable

CATALOG #2119.76

Set of 3, Color-coded 10 ft 5kV Safety w/3 Color-coded Alligator Clips (Rated 1000V CAT IV, 15A)

CATALOG #2119.77

Set of 3, 6 ft Color-coded 5kV safety

CATALOG #2119.78

1 ft (5kV) Jumper Lead

CATALOG #2119.79

Set of 3, 10 ft Color-coded 5kV Safety with Integral Hippo Clips, and Jumper Lead

CATALOG #2119.84

Fuse-Set of 3, FF, 0.1A, 380V, 10kA, 5 x 20mm

CATALOG #2119.85/.86/.87

Set of 3, 10/25/45 ft Color-coded 5kV Safety with Integral Hippo Clips, and Jumper Lead

CATALOG NO.	DESCRIPTION
2130.30	Megohmmeter Model 5070 (Graphical, Analog Bargraph, Backlight, Alarm, Timer, 500V, 1000V, 2500V, 5000V, Step V, Auto DAR/PI/DD, RS-232 with DataView® software)

MEGOHMMETERS

SELECTION CHART

AEMC MODEL NUMBER	AEMC CATALOG NUMBER	TEST VOLTAGE	INSULATION RANGE	RESISTANCE RANGE	CONTINUITY RANGE	CAPACITANCE RANGE	VOLTAGE DETECTION	POWER SOURCE	DISPLAY	DATAVIEW® SOFTWARE
6501	2126.51	500V	0.5 to 200MΩ	500kΩ	100Ω	—	600Vac	Hand-cranked	Analog	No
6503	2126.52	250V 500V 1000V	1 to 500MΩ 1 to 500MΩ 10 to 5000MΩ	—	—	—	600Vac	Hand-cranked	Analog	No
6527	2126.53	250V 500V 1000V	1kΩ to 4GΩ 1kΩ to 4GΩ 1kΩ to 4GΩ	400kΩ	400Ω	—	600Vac 1000Vdc	6 x AA Alkaline Batteries	Digital/ Analog	No
6522	2155.51	250V 500V 1000V	50kΩ to 10GΩ 100kΩ to 20GΩ 200kΩ to 40GΩ	—	10Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	No
6528	2156.51	250V 500V 1000V	0.050MΩ to 4200MΩ 0.100MΩ to 4200MΩ 0.20MΩ to 11GΩ	0 to 420kΩ	0 to 40Ω (200mA test current ≤ 2Ω)	—	700Vac 700Vac/dc	6 x AA Alkaline Batteries	Digital	No
6529	2156.52	50V 100V 250V 500V 1000V	0.010MΩ to 420MΩ 0.020MΩ to 420MΩ 0.050MΩ to 420MΩ 0.100MΩ to 420MΩ 0.20MΩ to 11GΩ	0 to 420kΩ	0 to 40Ω (200mA test current ≤ 2Ω)	—	700Vac 700Vac/dc	6 x AA Alkaline Batteries	Digital	No
6524	2155.52	50V 100V 250V 500V 1000V	10kΩ to 10GΩ 20kΩ to 20GΩ 50kΩ to 50GΩ 100kΩ to 100GΩ 200kΩ to 200GΩ	1000kΩ	10Ω, 100Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	No
6526	2155.53	50V 100V 250V 500V 1000V	10kΩ to 10GΩ 20kΩ to 20GΩ 50kΩ to 50GΩ 100kΩ to 100GΩ 200kΩ to 200GΩ	1000kΩ	10Ω, 100Ω	0.1n to 10μF	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6532	2155.54	50V 100V	10kΩ to 10GΩ 20kΩ to 20GΩ	1000kΩ	10Ω, 100Ω	0.1n to 10μF	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6534	2155.55	10V 25V 100V 250V 500V	2kΩ to 1GΩ 5kΩ to 2GΩ 10kΩ to 10GΩ 50kΩ to 25GΩ 100kΩ to 50GΩ	1000kΩ	10Ω, 100Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	Yes
6536	2155.56	10V 100V	2kΩ to 20GΩ	1000kΩ	10Ω, 100Ω	—	700Vac/dc	6 x AA Alkaline Batteries	Digital/ Analog	No
6536 ESD Floor Kit	2155.57	(variable in 1V steps)								
1050	2130.01	50V 100V 250V 500V 1000V	2kΩ to 200GΩ 4kΩ to 400GΩ 10kΩ to 1TΩ 20kΩ to 2TΩ 40kΩ to 4TΩ	400kΩ	40Ω	0.005 to 4.999μF	1000Vac/dc	8 x 1.5V C Cell Batteries	Digital/ Analog	No
1060	2130.03	50V 100V 250V 500V 1000V	2kΩ to 200GΩ 4kΩ to 400GΩ 10kΩ to 1TΩ 20kΩ to 2TΩ 40kΩ to 4TΩ	400kΩ	40Ω	0.005 to 4.999μF	1000Vac/dc	Rechargeable NiMH Battery	Digital/ Analog	Yes
6505	2130.18	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	No
5050	2130.20	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	No
5060	2130.21	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	Yes
5070	2130.30	500V 1000V 2500V 5000V	10kΩ to 2TΩ 10kΩ to 4TΩ 10kΩ to 10TΩ 10kΩ to 10TΩ	—	—	0.001 to 49.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Graphic/ Digital	Yes
6550	2130.31	500V 1000V 2500V 5000V 10,000V	10kΩ to 2000GΩ 10kΩ to 4000GΩ 10kΩ to 10,000GΩ 10kΩ to 15,000GΩ 10kΩ to 25,000GΩ	—	—	0.001 to 19.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	Yes
6555	2130.32	500V 1000V 2500V 5000V 10,000V 15,000V	10kΩ to 2000GΩ 10kΩ to 4000GΩ 10kΩ to 10,000GΩ 10kΩ to 15,000GΩ 10kΩ to 25,000GΩ 10kΩ to 30,000GΩ	—	—	0.001 to 19.99μF	2500Vac 4000Vdc	Rechargeable NiMH Battery	Digital/ Analog	Yes