

LINEAR WIDEBAND POWER AMPLIFIER

Model – AB2.0018G4348AC

General Description:

Elite RF's **AB Series** amplifier is a wideband power amplifier designed for CW signals fabricated on GaN on SiC process and can operate up to **18.0 GHz**. These amplifiers offer high power density, low thermal resistance, and wideband performance. They can be widely used for military and commercial applications.

Like all Elite RF amplifiers, this product comes with and industry leading warranty.



Features

Wide Freq. Range
High Output Power
High Gain
High Reverse Isolation
Built-in Protection

Indicator options

DC Power
Temp Fault

Protections

Thermal Overload
Over Voltage
Reverse Polarity

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	2000		18000	MHz
Output Power CW	Psat		20		Watt
Output Power at 1 dB Compression Small	P1dB		5		Watt
Signal Gain	Gp		48		dB
Gain Flatness	Delta Gp 1		+/- 3		dB
Input VSWR	S11		2:1		Ratio
IMD @ 12 GHz @ 1 watt one / 1 MHz spacing	IP3		45		dBm
Harmonics	H		-20		dBc
Spurious Signals	Spur		-50		dBc
AC Operating Voltage	VAC	100	120	240	VAC
AC Power at 20 watts	Pdiss		100		Watts
Class of Operation	C		AB		Class
Noise Figure	NF		5		dB
Large Signal Gain	Lsg		42		dB
Max Load VSWR @ 20 Watts	ML		6:1		Ratio

ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	Tc	-20		+60	Deg. C
Storage Temperature	Tstg	-40		+85	Deg. C
Relative Humidity (non-condensing)	RH			95	%
Altitude	ALT			10,000	Feet
Vibration/Shock	VI /SH				Normal Truck Transport




MECHANICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Dimensions	Dim		19 x 15 x 3.5		Inches
Weight	Wt.		1		lbs.
Connectors In/Out	RF Conn		SMA/2.92mm		-
Cooling	Th		Heat sink required		-

OPTIONS

Parameter	Add suffix to part number
Heat sink and fans	- H
Enable/Disable	- E
TTL Input Trigger	- T

Mechanical Drawings

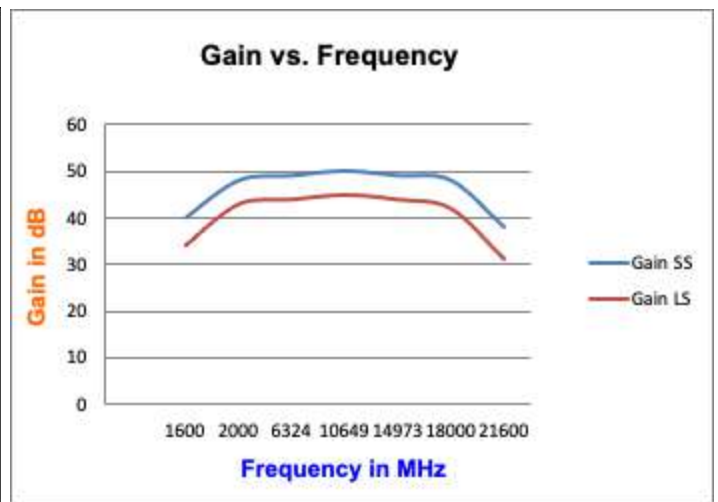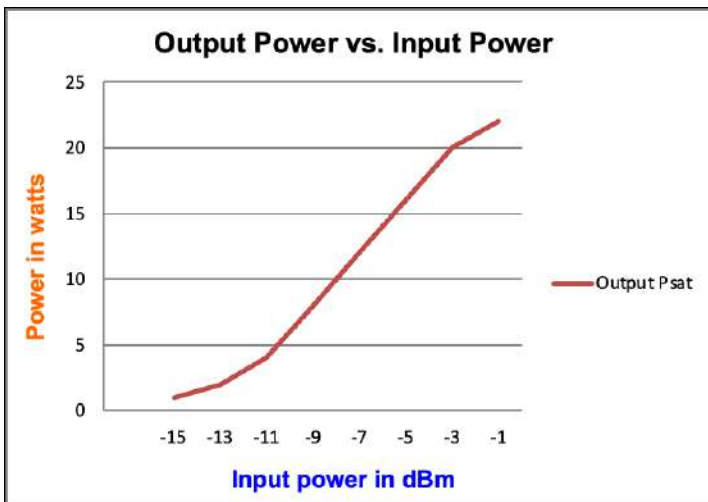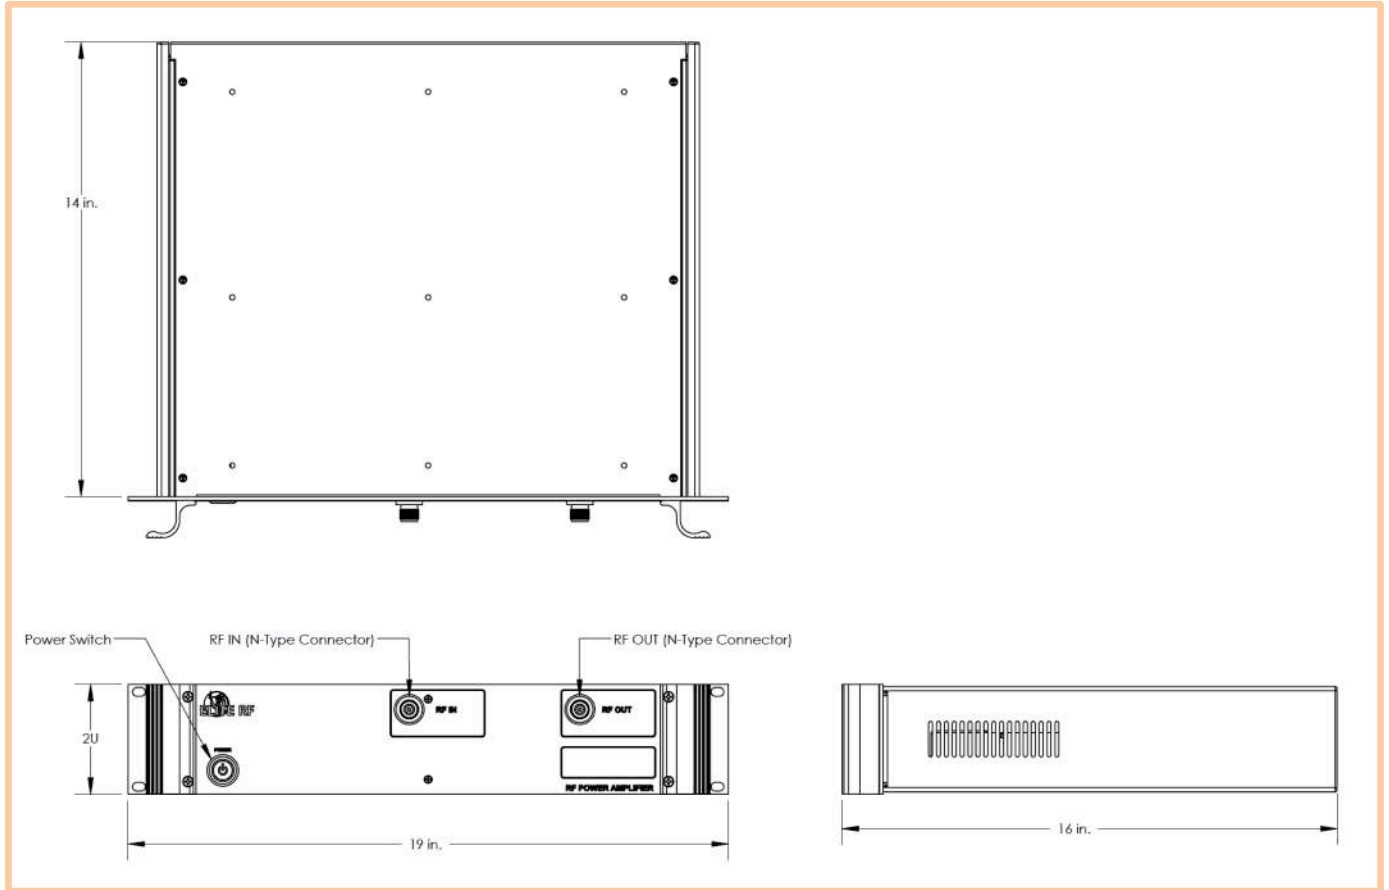

Elite RF LLC
 1700 Tower Dr, Hanover Park, IL 60133, USA
 Call us for customer service/technical support at: 847-592-6350
 Email: sales@eliterf.com Web: www.eliterfllc.com

Rev07/21/2023:
 Specifications subject to change,
 consult sales for latest information

Product Compliance:
 ECCN: 3A001.b.2.c
 USHTS: 8543.70.8000