


## TECHNICAL DATA

**5627A | Precision Thermometer, RTD Temperature Probe**



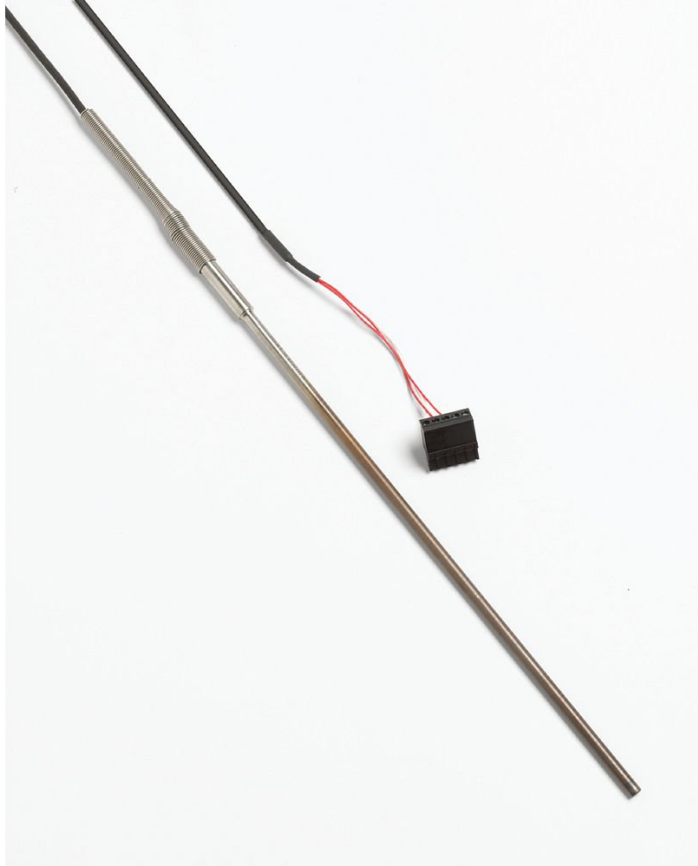

## Key features

- Temperature range up to 420 °C.
- Accuracy of up to  $\pm 0.025$  °C.
- NVLAP-accredited calibration.
- Three different length options, with both six- and nine-inch models covering a temperature range of -200 °C to 300 °C.

## Product overview: 5627A | Precision Thermometer, RTD Temperature Probe

One of the best features of this RTD sensor is that it conforms to the standard 385 curve, letting you use your DIN/IEC RTD meters fully. Why use a precision thermometer or RTD temperature probe that's less accurate than your meter?

The 5627A is manufactured using a coil suspension element design for increased shock and vibration resistance. It has a mineral-insulated sheath with a minimum bend radius of 19 mm (3/4-inch) for flexibility and durability. (Bend, if any, should be specified at time of order.)

Six- and nine-inch 5627A precision thermometers are calibrated at  $-196$  °C,  $-38$  °C,  $0$  °C,  $200$  °C, and  $300$  °C. For 12-inch versions of these precision thermometers, the point at  $300$  °C is replaced by a calibration point at  $420$  °C.

Each probe is individually calibrated and includes a NVLAP-accredited report of calibration from the manufacturer, lab code 200706-0.

This RTD temperature probe is an excellent value for a precision thermometer. It has the price-to-accuracy and price-to-durability ratios you should demand in all of the precision thermometers you buy!

## Specifications: 5627A | Precision Thermometer, RTD Temperature Probe

Specifications	
<b>Resistance</b>	Nominal 100 $\Omega$
<b>Temperature Coefficient</b>	0.00385 $\Omega/\Omega/^\circ\text{C}$ nominal
<b>Temperature Range</b>	-200 $^\circ\text{C}$ to 420 $^\circ\text{C}$ (5627A-6 and 5627A-9 to 300 $^\circ\text{C}$ ; transition and cable temperature: 0 $^\circ\text{C}$ to 150 $^\circ\text{C}$ )
<b>Drift Rate (k=2)</b>	$\pm 0.04$ $^\circ\text{C}$ at 0 $^\circ\text{C}$ after 100 hours at 420 $^\circ\text{C}$
<b>Sheath Material</b>	316 Stainless Steel
<b>Leads</b>	PTFE-insulated, nickel-plated stranded copper, 22 AWG
<b>Termination</b>	Specify. See Ordering Information.
<b>Time Constant</b>	Four seconds maximum for 63.2 % response to step change in water moving at 3 fps.
<b>Bending Radius</b>	Sheath may be ordered with a bend on a minimum radius of 19 mm (3/4 in) except for 50 mm (2 in) area of sheath near tip. (Fluke lab requires 20 cm [8 in] of unbent sheath to re-calibrate.)
<b>Calibration</b>	Includes manufacturer's NVLAP-accredited (lab code 200706-0) calibration and table with R vs. T values in 1 $^\circ\text{C}$ increments from -196 $^\circ\text{C}$ to 500 $^\circ\text{C}$ (to 300 $^\circ\text{C}$ for 5627A-6 and 5627A-9). ITS-90 coefficients included.
<b>Immersion</b>	At least 100 mm (4 in) recommended
<b>Calibrated Accuracy† (k=2)</b>	$\pm 0.026$ $^\circ\text{C}$ at -196 $^\circ\text{C}$ $\pm 0.046$ $^\circ\text{C}$ at 0 $^\circ\text{C}$ $\pm 0.077$ $^\circ\text{C}$ at 200 $^\circ\text{C}$ $\pm 0.124$ $^\circ\text{C}$ at 420 $^\circ\text{C}$
<b>Size</b>	<b>5627A-12:</b> 305 mm x 6.35 mm (12 in x 1/4 in) <b>5627A-9:</b> 229 mm x 4.7 mm (9 in x 3/16 in) <b>5627A-6:</b> 152 mm x 4.7 mm (6 in x 3/16 in)
†Includes calibration uncertainty and 100 hr drift.	

## Ordering information



### 5627A Precision Thermometer, RTD Temperature Probe

Precision Thermometer, RTD Temperature Probe

#### 5627A-6-X

Secondary PRT, 152 mm x 4.7 mm (6 x 3/16 in), -200 °C to 300 °C

(17025 accredited calibration included. Traceable to NIST standards.)

X = termination. Specify "A" (INFO-CON for 914X), "B" (bare wire), "D" (5-pin DIN for Tweener Thermometers), "G" (gold pins), "J" (banana plugs), "L" (mini spade lugs), "M" (mini banana plugs), "P" (INFO-CON for 1523 or 1524), or "S" (spade lugs).

#### 5627A-9-X

Secondary PRT, 229 mm x 4.7 mm (9 x 3/16 in), -200 °C to 300 °C

(17025 accredited calibration included. Traceable to NIST standards.)

X = termination. Specify "A" (INFO-CON for 914X), "B" (bare wire), "D" (5-pin DIN for Tweener Thermometers), "G" (gold pins), "J" (banana plugs), "L" (mini spade lugs), "M" (mini banana plugs), "P" (INFO-CON for 1523 or 1524), or "S" (spade lugs).

#### 5627A-12-X

Secondary PRT, 305 mm x 6.35 mm (12 x 1/4 in), -200 °C to 420 °C

(17025 accredited calibration included. Traceable to NIST standards.)

X = termination. Specify "A" (INFO-CON for 914X), "B" (bare wire), "D" (5-pin DIN for Tweener Thermometers), "G" (gold pins), "J" (banana plugs), "L" (mini spade lugs), "M" (mini banana plugs), "P" (INFO-CON for 1523 or 1524), or "S" (spade lugs).

**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**  
PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**  
In the U.S.A. (800) 443-5853  
In Canada (800) 36-FLUKE  
From other countries +1 (425) 446-5500  
[www.fluke.com](http://www.fluke.com)

©2025 Fluke Corporation.  
Specifications subject to change without notice.  
02/2025

**Modification of this document is not permitted  
without written permission from Fluke Corporation.**