


48-Port Console Server, USB Ports (2) - Dual GbE NIC, 4 Gb Flash, Desktop/1U Rack, TAA

MODEL NUMBER: **B097-048**

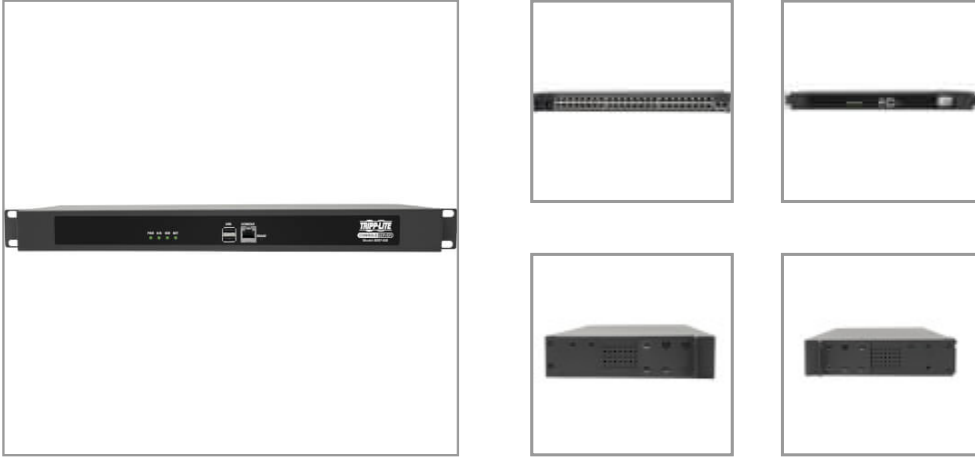

48-port serial console server lets you remotely access and control serial-based networking equipment through one highly secure gateway.

Features

Access All Your Serial and Network Devices from Anywhere in the World at Any Time This USB console server provides secure in-band (primary network) and out-of-band (alternate channel) remote access to serial- and network-connected routers, network switches, firewalls, PBX systems, UPS systems, PDUs and other devices. It offers reliable network connectivity with dual Gigabit primary and failover Ethernet ports and dual power supplies. You can use it in a wide variety of applications, including wiring closets, branch offices, kiosks, point-of-sale and other remote sites where a quick identification and resolution of network issues is imperative.

Simple and Flexible Accessibility The 48 RJ45 console ports are configured to use standard Cat5e/6 patch cable when connecting to Cisco devices. They integrate with industry-standard directory servers using TACACS+, RADIUS, LDAP and Kerberos authentication. Provides 4 Gb of internal NAND flash memory, which can be used for log storage and file storage.

Connect an External Modem for Out-of-Band Access Connect one of the 48 RJ45 ports to an external Multitech MT9234MU-CDC-XR or US Robotics USR5637 USB modem (not included) to receive out-of-band (alternate channel) access when remote sites experience a network outage.

Router/Gateway Each gateway can port forward to an unlimited number of locally networked hosts (computers, routers). This rack console also includes a built-in stateful firewall and embedded DHCP server to host a separate management LAN for critical traffic.

The Utmost in Security to Keep Your Sensitive Data Private The USB console server supports the following security features and standards: PCI DSS 3.2, FIPS 140-2, SSL and SSH, stateful firewall, OpenVPN and IPSec VPN support. The embedded FIPS 140-2 OpenSSL cryptographic module is validated to meet FIPS 140-2 standards and has received Certificate #2473.

PowerMan PDU and UPS Support This 48-port serial console server uses PowerMan for PDU and RPC management and Network UPS Tools for UPS system monitoring and management. It provides support for Tripp Lite and other power products, so you can remotely manage power to your connected equipment.

USB Console Two USB 2.0 console ports allow connection to newer devices with USB console ports,

Highlights

- Manage routers, UPS systems and other serial-based equipment from anywhere 24/7
- Validated to meet FIPS 140-2 standards to ensure utmost protection of private data
- Dual Gigabit Ethernet ports for primary network connection and automatic failover
- Designed for standard Cat5e/6 patch cable when connecting to Cisco devices
- Easy installation on desktop or in 19 in. racks using included mounting hardware

Applications

- Securely access and control servers, routers, KVM switches and other serial-connected devices in your data center 24/7
- Manage diverse server and device platforms using a network connection
- Diagnose and fix issues with your IT infrastructure remotely with little or no downtime
- Troubleshoot equipment issues without spending time/money traveling to remote locations

Package Includes

- B097-048 48-Port Serial Console Server
- (2) C13 to NEMA 5-15P power cords, 6 ft.
- (2) Cat5e patch cables, 6 ft.
- Straight-through serial adapter, DB9 to RJ45 (F/F)
- Crossover serial adapter, DB9 to RJ45 (F/F)
- Modular serial adapter, DB9 to RJ45 (M/F)
- Rack-mounting hardware
- (6) Rubber feet
- Quick Start Guide



such as Tripp Lite's wide variety of PDUs and UPS systems with WEBCARDLX or other LX Platform remote management cards.

Compact Design for Convenient MountingThe heavy-duty steel housing comes with mounting brackets for 1U installation in an EIA-standard 19-inch rack. Its fanless form factor also allows desktop deployment on included rubber feet that help prevent the unit from sliding.

TAA-Compliant for GSA Schedule PurchasesThe B097-048 is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

Specifications

OVERVIEW	
UPC Code	037332218032
Multi-User	Yes
INPUT	
Voltage Compatibility (VAC)	100; 110; 120; 125; 127; 200; 208; 220; 230; 240
Power Input Receptacle	IEC-320-C14
Redundancy - Dual Power Inputs	Yes
POWER	
Power Consumption (Watts)	25
USER INTERFACE, ALERTS & CONTROLS	
LED Indicators	8 LED's for Power, Heartbeat-Firmware Running, Serial Connectivity and Network Ports
PHYSICAL	
Material of Construction	Metal
Color	Black
Rackmountable	Yes
Shipping Dimensions (hwd / cm)	8.38 x 26.92 x 49.02
Shipping Dimensions (hwd / in.)	3.30 x 10.60 x 19.30
Shipping Weight (kg)	3.45
Shipping Weight (lbs.)	7.60
Unit Dimensions (hwd / in.)	1.75 x 6.9 x 17.32
Unit Dimensions (hwd / cm)	4.5 x 17.5 x 44
Unit Packaging Type	Box
ENVIRONMENTAL	



Operating Temperature Range	41 to 122 F (5 to 50 C)
Storage Temperature Range	-22 to 140 F (-30 to 60 C)
Relative Humidity	5% to 90% RH, Non-Condensing
BTUs	85.3 BTU/Hr
COMMUNICATIONS	
IP Remote Access	Yes
Network Compatibility	1 Gbps (Gigabit)
IEEE Standards Supported	802.3; 802.3ab; 802.3ad
CONNECTIONS	
Number of Ports	48
Side A - Connector 1	RJ45 (FEMALE)
Side A - Connector 2	(2) USB A (FEMALE)
Side B - Connector 1	(48) RJ45 (FEMALE)
Side B - Connector 2	(2) RJ45 (FEMALE)
FEATURES & SPECIFICATIONS	
Port Selection	CLI; GUI
Driver Required	No
Authentication Supported	RADIUS; LDAP; TACACS
Common Access Card (CAC) Support	No
REMOTE ACCESS	
Modem Port	No
WARRANTY	
Product Warranty Period (Worldwide)	4-year limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>