


Cisco-Compatible GLC-SX-MMD 1000Base-SX SFP Transceiver, DDM, Multimode LC, 850nm, 550M

MODEL NUMBER: N286-01GSX-MDLC

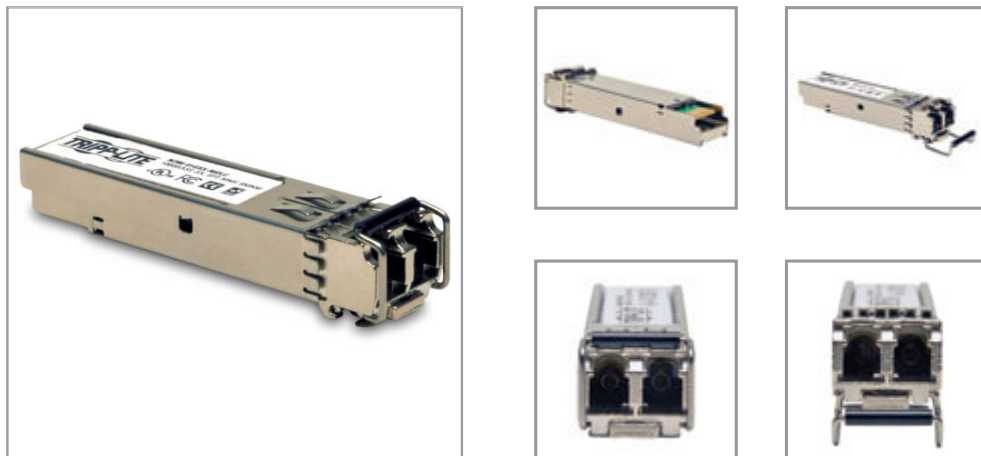

Description

Tripp Lite N286-01GSX-MDLC, SFP+ (mini-GBIC) transceiver module, is designed for use with Cisco networking equipment, and is functionally equivalent to Cisco part number GLC-SX-MMD=. This transceiver is manufactured to meet or exceed the specifications of the original Cisco unit, and to comply with Multi Source Agreement (MSA) standards. Tripp Lite guarantees 100% compatibility with Cisco networking hardware, and will initialize and perform identically to an OEM transceiver. See "Features" tab for a list of most common Cisco devices used with this model transceiver.

Features

- Cisco switch compatible...Comparable to GLC-SX-MMD=
- Compliant with SFP Multi-Source Agreement (MSA) standards
- 1000Base-SX transceiver supports data transfer rates up to 1.25Gbps
- 300 meter transmission distance using 62.5/125 Multimode cabling
- 500 meter transmission distance using 50/125 Multimode cabling
- 850nm wavelength VCSEL Laser
- Duplex LC Connector
- Electrical interface compliant with SFF-8431
- Supports Digital Diagnostic Monitoring (DDM)
- Hot-pluggable

Specifications

OVERVIEW	
UPC Code	037332185488
Brand Compatibility	Cisco

Highlights

- Cisco switch compatible...Comparable to GLC-SX-MMD=
- Compliant with SFP Multi-Source Agreement (MSA) standards
- 300 meter transmission distance using 62.5/125 MMF cabling
- 500 meter transmission distance using 50/125 MMF cabling

System Requirements

For a list of compatible switches, see the Switch Compatibility document in the Resources section of this model's web page, or in its Technical Support page.

Package Includes

- N286-01GSX-MDLC Transceiver
- Quick Start Guide



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

PHYSICAL	
Shipping Dimensions (hwd / cm)	2.21 x 7.29 x 12.29
Shipping Dimensions (hwd / in.)	0.87 x 2.87 x 4.84
Shipping Weight (kg)	0.05
Shipping Weight (lbs.)	0.10
Unit Dimensions (hwd / in.)	0.33 x 0.52 x 2.24
Unit Dimensions (hwd / cm)	0,84 x 1,32 x 5,69
Unit Weight (lbs.)	0.05
Unit Weight (kg)	0.02
ENVIRONMENTAL	
Operating Temperature Range	32 to 158 °F (0 to 70 °C)
Storage Temperature Range	0.33 x 0.52 x 2.24
Relative Humidity	5 to 95% RH, Non-Condensing
Operating Temperature	32 to 158 °F (0 to 70 °C)
COMMUNICATIONS	
Network Compatibility	1 Gbps (Gigabit)
Wavelength	850nm
Transmission Distance	550 m
CONNECTIONS	
Side A - Connector 1	SFP+ (MALE)
Side B - Connector 1	LC DUPLEX (FEMALE)
FEATURES & SPECIFICATIONS	
Data Transfer Rate	1 Gbps
Optical Port	LC
Multi-Source Agreement (MSA) Compliant	Yes
WARRANTY	
Product Warranty Period (Worldwide)	3-year limited warranty

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>