


1.4kW Single-Phase Switched PDU - LX Interface, 120V Outlets (16 5-15R), 10 ft. (3.05 m) Cord with 5-15P, 0U, TAA

MODEL NUMBER: PDUMV15NETLX

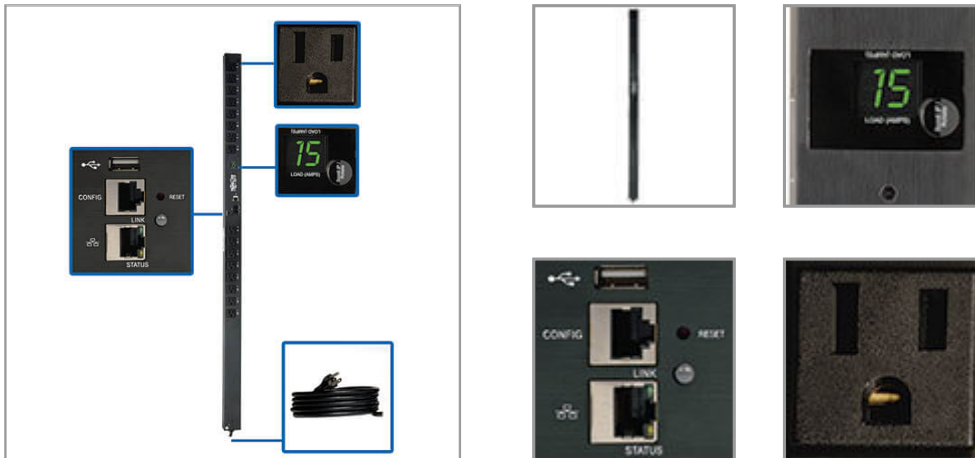

1.4kW vertical PDU distributes, monitors and manages single-phase power in an IT environment with no Java required. Built-in network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

Description

The PDUMV15NETLX 1.4kW Single-Phase Switched PDU provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. Recommended for IT and industrial applications, the vertical PDU features 16 switched NEMA 5-15R outlets with included cord retention brackets to prevent cables from becoming accidentally disconnected. A 10-ft. (3.05 m) cord with NEMA 5-15P plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A digital ammeter allows you to monitor the total load in real time to ensure it remains well below maximum capacity with no danger of overload. The vertical PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

Features

Distributes Network-Grade AC Power 1.4kW 120V switched PDU with single-phase input Recommended for network applications requiring individual outlet control, load shedding and remote monitoring of critical network components NEMA 5-15P plug with 10-ft. (3.05 m) cord connects to compatible AC power source Firmware upgrades support future product enhancements

16 Switched NEMA 5-15R Outlets Distribute AC Power Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Cord retention brackets prevent cables from becoming accidentally disconnected

Digital Ammeter Reports total PDU load in real time Supports IP-address self-ID Rotates 180° for easy reading at either angle

Highlights

- 1.4kW 120V single-phase switched 0U PDU
- 16 individually controllable NEMA 5-15R outlets
- Pre-installed WEBCARDLX with latest version of PADM20 for IP-based Auto Probe feature
- Digital ammeter for on-site load monitoring in real time
- NEMA 5-15P input with 10-ft. (3 m) AC power cord

Package Includes

- PDUMV15NETLX 1.4kW Single-Phase Switched PDU
- Built-in LX Platform interface
- Configuration cable
- (16) Cable ties
- (2) Cord retention brackets
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Built-In LX Platform InterfacePre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilitiesPADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurationsIP-based Auto Probe detects lost connectivity and restores service autonomouslySupports 10/100 Mbps auto-sensing for communication with an Ethernet networkOptional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilitiesNo Java required

Broad Communications CompatibilitySupports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTPSupports automatic and manual assignment of IP address

Easy 0U Installation in EIA-Standard 19 in. RacksVertical PDU mounts using included toolless buttons or rack-mounting bracketsIncluded PDUMVROTATEBRKT allows mounting with rear-facing outlets

TAA-CompliantCompliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

| OVERVIEW | |
|--|---|
| UPC Code | 037332205193 |
| PDU Type | Switched |
| INPUT | |
| PDU Input Voltage | 120 |
| Recommended Electrical Service | Single-phase 15A 120V service |
| Maximum Input Amps | 12 |
| Maximum Input Amps Details | Agency de-rated to 12A continuous |
| PDU Plug Type | NEMA 5-15P |
| Input Phase | Single-Phase |
| Input Cord Length (ft.) | 10 |
| Input Cord Length (m) | 3.05 |
| OUTPUT | |
| Output Capacity Details | 1.44kW (120V) / 12A total capacity; 12A max per outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (16) 5-15R |
| Output Nominal Voltage | 120V |
| Customized Load Management Receptacles | Each outlet is individually controllable via remote interface |
| USER INTERFACE, ALERTS & CONTROLS | |
| Front Panel LCD Display | Digital LED display reports total PDU output current in amps |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|--------------------------------------|--|
| Front Panel LEDs | 16 LEDs display power on-off status for each output receptacle; Network Link/Activity Status LED (Yellow), Network Speed LED (Green); LX Platform status LED (Green) |
| Switches | Pushbutton control supports 180 degree Display Rotation and Scroll IP address functions; LX Platform Interface: Recessed reset switch for interface reboot and factory reset |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Metal |
| Form Factors Supported | 0U vertical rackmount. Includes mounting brackets. Supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / cm) | 10.16 x 15.24 x 131.44 |
| Shipping Dimensions (hwd / in.) | 4.00 x 6.00 x 51.75 |
| Shipping Weight (kg) | 4.99 |
| Shipping Weight (lbs.) | 11.00 |
| Unit Dimensions (hwd / in.) | 49 x 2.19 x 2.65 |
| Unit Dimensions (hwd / cm) | 124.5 x 5.6 x 6.7 |
| Unit Weight (lbs.) | 7 |
| Unit Weight (kg) | 3.18 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 0C ~ 40C (32F ~ 104F) |
| Storage Temperature Range | -30°C to +60°C (-22°F to +140°F) |
| Relative Humidity | 5-95% non-condensing |
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |
| COMMUNICATIONS | |
| PowerAlert Software | LX Platform Interface: PowerAlert Device Manager |
| Communications Cable | RJ45-to-DB9 configuration/console Access cable |
| Network Monitoring Port | RJ45 Network port, RJ45 Console port; USB A supports a variety of Envirosense2 environmental monitoring and control options. See Accessories>Management Hardware section for more information about these modules. |
| SNMP Compatibility | Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, Telnet, SSH, CLI and SNMP management systems |
| Network Compatibility | 10 Mbps; 100 Mbps (Fast Ethernet) |
| FEATURES & SPECIFICATIONS | |
| High Availability PDU Features | Auto Probe Monitoring and Reboot (included); Auto Load Shedding |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| STANDARDS & COMPLIANCE | |
|-------------------------------------|--|
| Product Certifications | CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS; FCC Part 15 Class A (USA) |
| WARRANTY | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>